

Top 100
Global
Innovator
for 10 years

XGT Series

Programmable Logic Controller



LS ELECTRIC

XGT series, innovative solutions for system integration
from field to information level.

Open Network System Integration



neXt Generation Technology
XGT Series



FEATURES 4 ~ 13



CPU 14 ~ 31



SYSTEM 32 ~ 43



NETWORK 44 ~ 93



SPECIAL 94 ~ 125



SOFTWARE 126 ~ 147

FEATURES

CPU

SYSTEM

NETWORK

SPECIAL

SOFTWARE

Welcome to XGT World!

XGT series will meet your needs and expectations, enabling the highest possible productivity and performance levels and more.



XGT // CPUU CPUS
CPUH CPUE
CPUA




Features

XGT series is the next-generation solution with a new concept providing advanced engineering environment based on open network, fastest processing speed, compact size and user-friendly software.



Also, LS ELECTRIC has been certified with IEC 62443-4-1:

Secure product development lifecycle requirements for industrial automation and control systems by TÜV SÜD

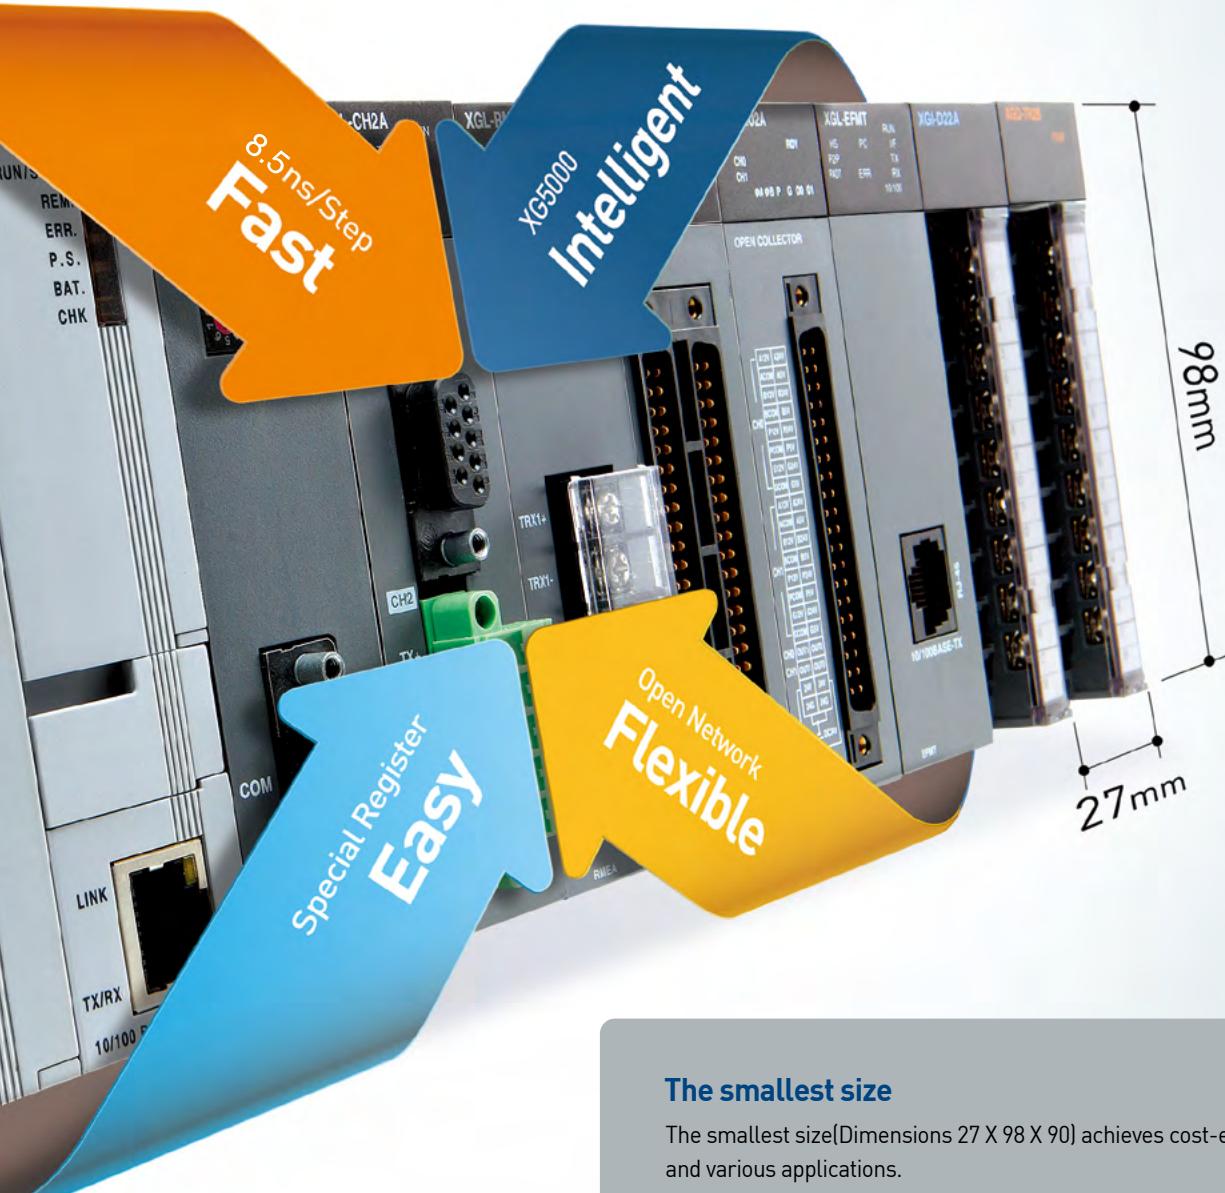

The smallest size

The smallest size(Dimensions 27 X 98 X 90) achieves cost-efficiency and various applications.

Item	Power Supply	CPU	8-slot Base
Size (WxHxD)	55x98x90	27x98x90	318x98x17


Features

XGT series, neXt Generation Technology for easier, faster and smarter automation, will provide you with future-oriented solutions, bringing greener, safer and more convenient life for you...

System Integration of Open Network

XGT series support various communication solutions ranging from field control to information level with Fast Ethernet, Profibus-DP, DeviceNet, Modbus, etc.




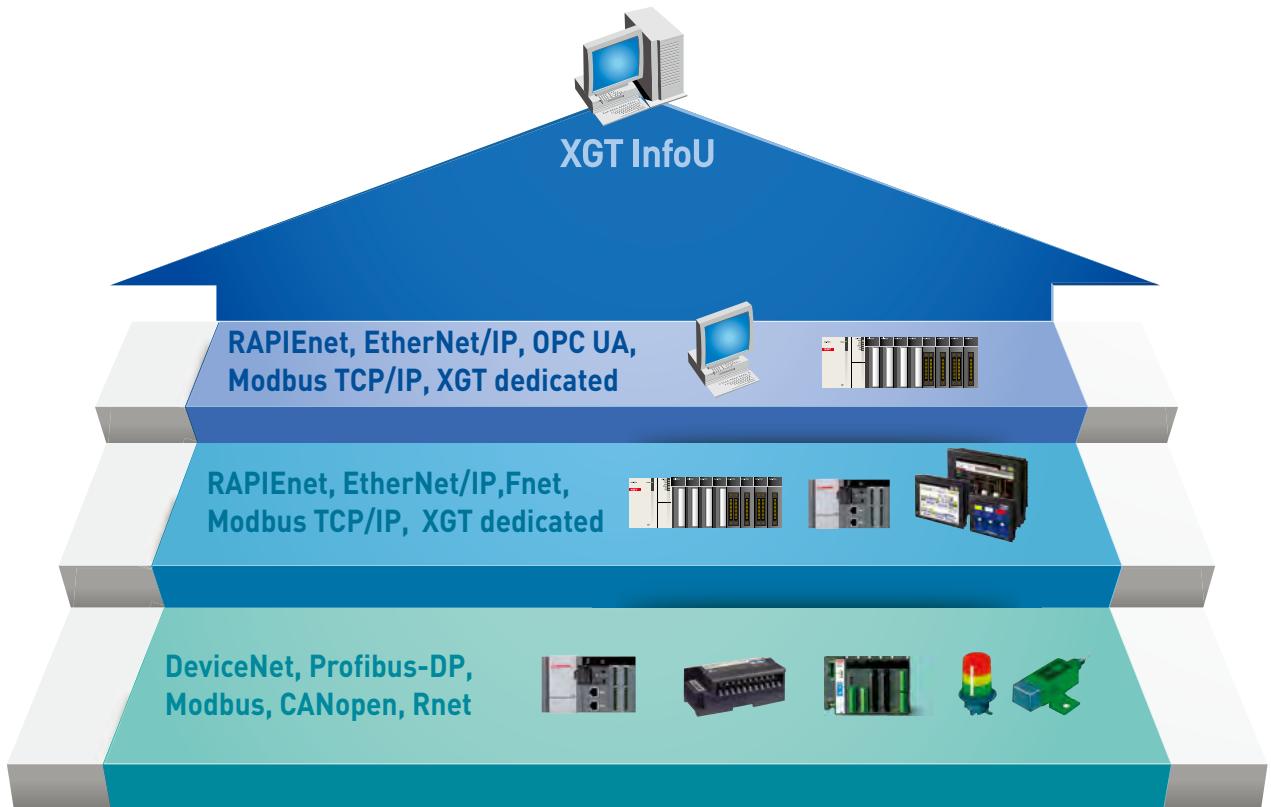

Do you want more
powerful features and performance?
answer is LS ELECTRIC

XGT New CPU


New XGT CPU has 3 times faster cpu processing speed,
2 times larger memory capacity and built in ethernet port.

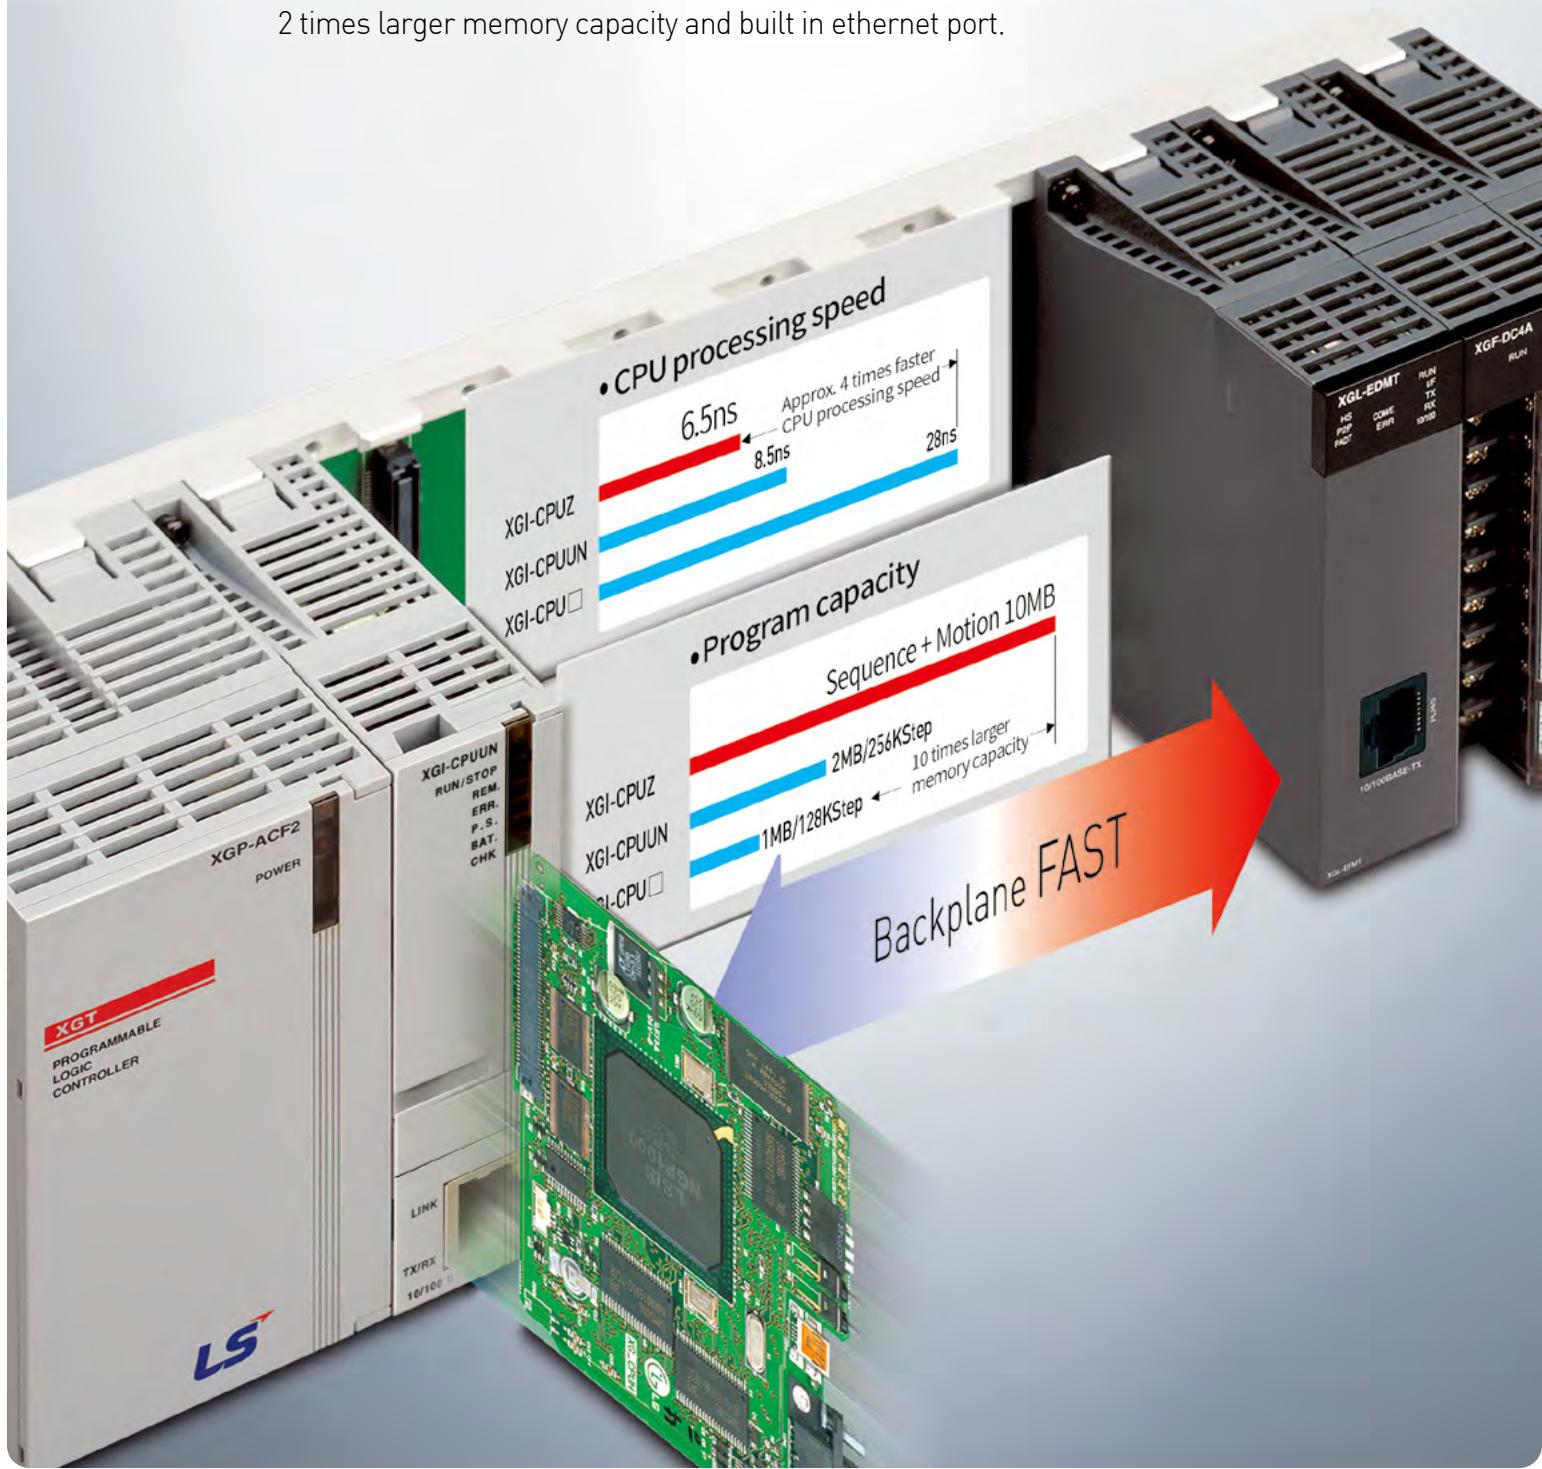

Compare of scan time between XGI-CPUU and XGI-CPUUN


Using 1 MOVE word

Item	XGI-CPUZ	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS
Current scan time	0.4ms	1.0ms	0.5ms	0.9ms	0.9ms	0.8ms
Min. scan time	0.3ms	0.8ms	0.4ms	0.8ms	0.8ms	0.7ms
Max. scan time	0.5ms	1.1ms	0.7ms	1.4ms	2.2ms	2.1ms

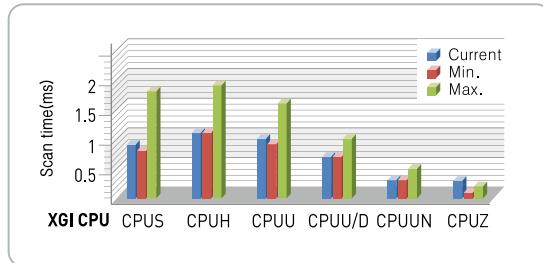


Using 1,000 MOVE word

Item	XGI-CPUZ	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS
Current scan time	0.5ms	1.0ms	0.6ms	1.0ms	1.0ms	1.0ms
Min. scan time	0.4ms	0.9ms	0.6ms	1.0ms	10.ms	0.9ms
Max. scan time	0.8ms	1.2ms	0.9ms	1.6ms	2.4ms	2.3ms

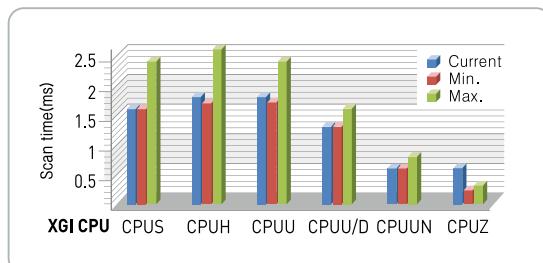


Device memory range

CPU	Device memory	Existing		New	
		A	M		
XGI CPUZ	A	-	-	1024KB(CPUZ3) 2048KB(CPUZ5) 4096KB(CPUZ7)	
	M	-	-	512KB(CPUZ3) 1024KB(CPUZ5) 2048KB(CPUZ7)	
XGI CPU	A	512KB	-	1024KB	
	M	256KB	-	512KB	
XGK CPU	P/M/K	32,768 point	-	65,5356 point	
	T	T000-T2047	-	T000-T8191	
	C/S/Z, R/ZR	2~8 times larger			

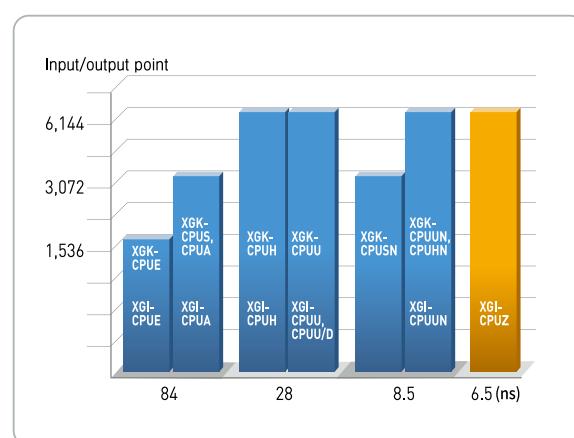

Easy connection

- Local ethernet connect with XG5000
- Program upload / download
- Set parameter

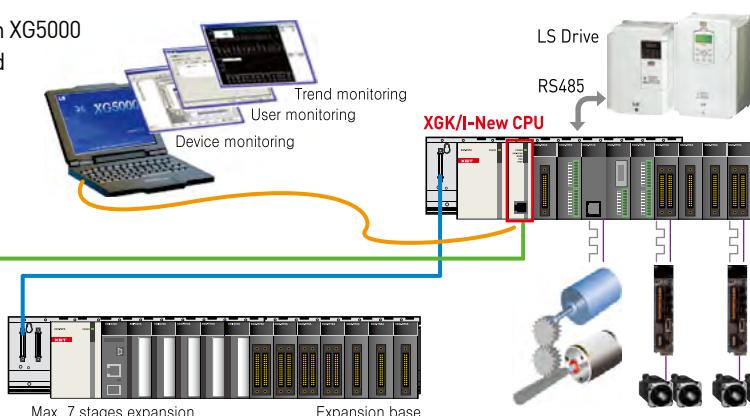

Engineering & Programming Innovation Easy

Special Register

XGT series expand device memory and support advanced programming environment with Index register (Z), File register (U), and Analog register (U).



File register

As a non-volatile memory type, data are secured even in times of blackout or CPU reset.



Analog register



Assigning base, slot and memory buffer of an analog module to device, A/D conversion data can be accessed without analog commands.



Index register



Index register is used in the sequence program for array operation.

Example of Analog Register

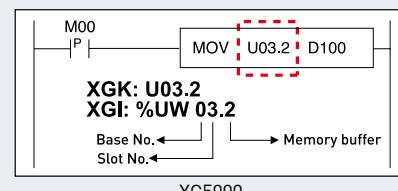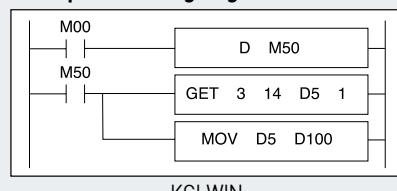


Analog Operation without Programming

Special module setup and operation is achieved by just parameter setting without additional program.



Set up high-speed

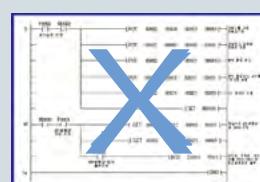

Set up analog module counter module


Program Modularization and Task Operation

Available to run multiful programs through medulization of scan programs based on functions and author, and to operate task programs triggered by specific conditions.


Program type	Description	Number
Scan program	Scan	Executed in every scan 256-task
	Initialization task	Executed only one time when power turns on 1
Task program	Time driven task	Executed with a constant time interval specified in parameter setting 32
	Internal task	Executed by internal condition 32
	External interrupt task	Executed by external interrupt input 32

IEC standard language (XGI): LD, SFC, ST

Ladder Diagram

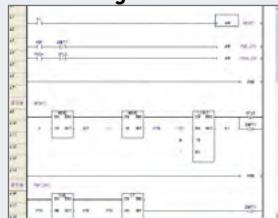

SFC

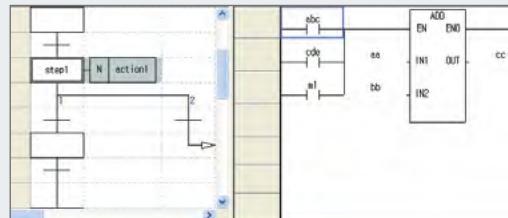

ST

```



19 X2 := (- II - SQRT(0))/(2.0*II) ;
20 END_IF ;
21
22
23// CASE문 예제
24 I0 := WORD_BCD_TO_INT(THUMBWHEEL);
25 I0_ERROR := 0;
26 GRSV I0;
27 1: DISPLAY := EVEN TEMP;
28 2: DISPLAY := MOTOR SPEED;
29 3: DISPLAY := GROSS - TARE;
30 4, 6, 10: DISPLAY := BCD(TM, %);
31 ELSE DISPLAY := %;
32 TM_ERROR := %;
33 END_CASE;
34 I0W100 := INT_TO_BCD_WORD(DISPLAY);
35
36// FOR문 예제
37 SUM := 0;
38 FOR I := 1 TO 3 DO
39   FOR J := 1 TO 2 DO
40     IF FLAG THEN EXIT; END_IF;
41     SUM := SUM + J;
42   END_FOR;
43   SUM := SUM + I;
44 END_FOR;

```

ST features

- High-level Language
- Fit for the complicate algorithm
- Various open source (Compatibility)
- Easy data processing
- Convenient text editor

User defined Function block (XGI)

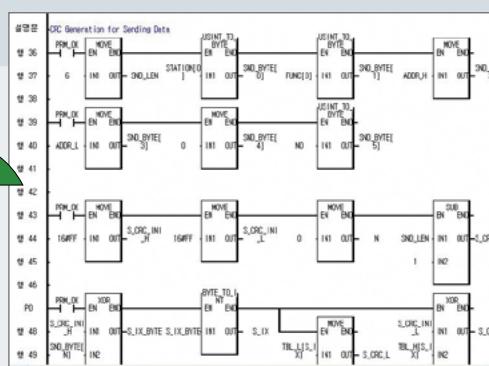

- Standardize the program using function or function block
- Register the standardized program as a library file and reuse the library for another project





CPU & System Configuration

XGT series contain variety of CPU types for customized solutions which support wide coverage from small / middle- to large size-system control.

Contents 16 CPU module
25 I/O module



XGK CPU (LS Standard)

Premium CPU for high-speed and large scale application

**XGK-CPUUN**

- Program capacity: 256K steps
- I/O points: 6,144
- I/O device point: 65,536
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUHN**

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 65,536
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUSN**

- Program capacity: 64K steps
- I/O points: 3,072
- I/O device point: 65,536
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUU (Ultra capacity)**

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

**XGK-CPUH (High performance)**

- Program capacity: 64K steps
- I/O points: 6,144
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

**XGK-CPUA (Advanced)**

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

General sequence controller PLC CPU

**XGK-CPUS (Standard)**

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 84ns/step

**XGK-CPUE (Economic)**

- Program capacity: 16K step
- I/O point: 1,536
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 84ns/step

XGI CPU (IEC Standard)

Premium CPU for high-speed and large scale application

**XGI-CPUZ**

- Program Capacity
- I/O points
- I/O device point
- Processing speed

**XGI-CPUUN**

- Program capacity: 2MBytes
- I/O points: 6,144
- I/O device point: 131,072
(Remote I/O)
- Processing speed: 8.5ns/step

**XGI-CPUU**

- Program capacity: 1MBytes
- I/O points: 6,144
- I/O device point: 131,072
(Remote I/O)
- Processing speed: 28ns/step

**XGI-CPUH**

- Program capacity: 512KBytes
- I/O points: 6,144
- I/O device point: 131,072
(Remote I/O)
- Processing speed: 28ns/step



**XGI-CPUS (IEC Standard)**

- Program capacity: 128KBytes
- I/O points: 3,072
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 28ns/step

**XGI-CPUE (IEC Standard)**

- Program capacity: 64KBytes
- I/O points: 1,536
- I/O device point: 32,768
(Remote I/O)
- Processing speed: 84ns/step

CPU Module System composition

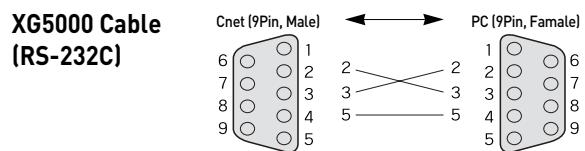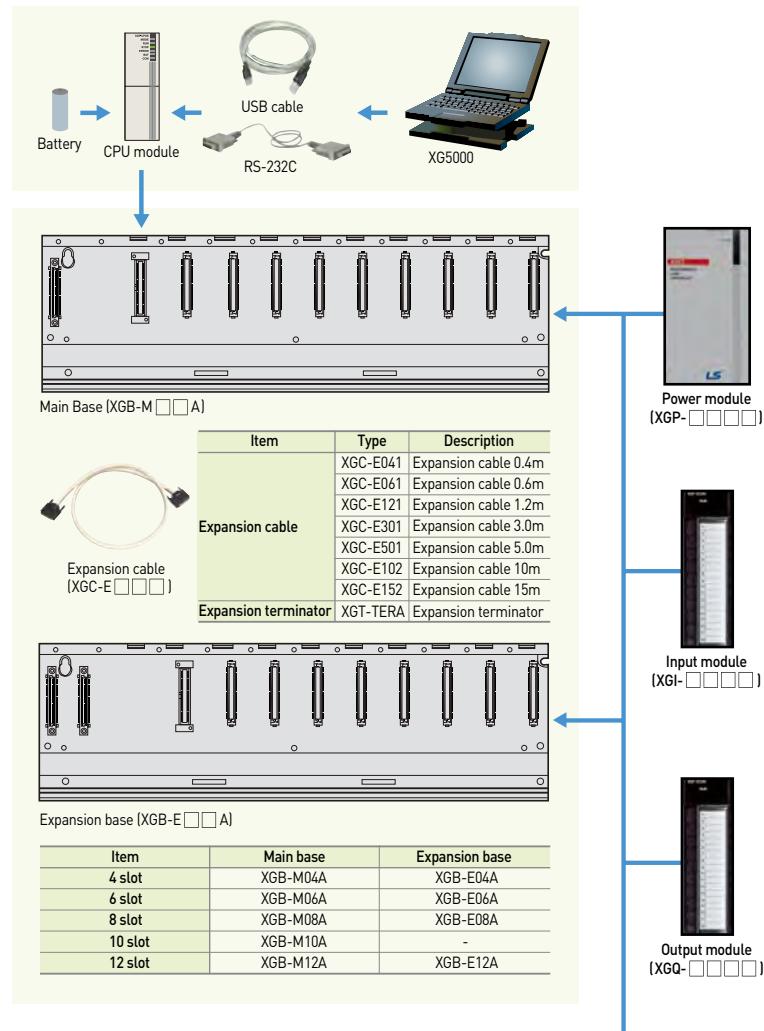

	CPU module	I/O point
XGK	XGK-CPUH,CPUU,CPUHN,CPUUN	6,144
	XGK-CPUS,CPUA,CUPSN	3,072
	XGK-CPUE	1,536
XGI	XGI-CPUUN,CPUU/D,CPUU,CPUH	6,144
	XGI-CPUS	3,072
	XGI-CPUE	1,536

CPU Connecting Cable		
USB 301A	USB	USB downloading cable
K1C-050A	RS-232C	RS-232C downloading cable

Item	Type	Description
USB cable	USB-301A	USB downloading cable
RS-232C cable	K1C-050A	RS-232C downloading cable

Item	Input module		
	AC110V	AC220V	DC24V
8 points	-	XGI-A21A	XGI-D21A
16 points	XGI-A12A	-	XGI-D22A
32 points	-	-	XGI-D24A
64 points	-	-	XGI-D28A

Power module		
XGP-ACF1	AC110/220V	DC5V 3A, DC24V 0.6A
XGP-ACF2	AC110/220V	DC5V 6A
XGP-AC23	AC220V	DC5V 8.5A
XGP-AC24	AC220V	DC5V 10A
XGP-DC42	DC24V	DC5V 6A

Item	Output module		
	Relay	Triac	Transistor
8 points	XGQ-RY1A	-	XGQ-TR1C
16 points	XGQ-RY2A	XGQ-SS2A	XGQ-TR2A
32 points	XGQ-RY2B	-	XGQ-TR2B
64 points	-	-	XGQ-TR4A
	-	-	XGQ-TR4B
	-	-	XGQ-TR8A
	-	-	XGQ-TR8B

Special module		
XGF-AV8A	Voltage input type, 8Ch	
XGF-AC8A	Current input type, 8Ch	
XGF-AD8A	Voltage/ Current input, 8Ch	
XGF-AD4S	Voltage/ Current input, 4Ch [Isolated]	
XGF-AD16A	Voltage/ Current input, 16Ch	
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch [Isolated]	
XGF-DV4A	Voltage output type, 4Ch	
XGF-DC4A	Current output type, 4Ch	
XGF-DV8A	Voltage output type, 8Ch	
XGF-DC8A	Current output type, 8Ch	
XGF-DV4S	Voltage output, 4Ch [Isolated]	
XGF-DC4S	Current output, 4Ch [Isolated]	
XGF-DA4S	Voltage/Current output, 4Ch [Isolated]	
XGF-AH6A	Input: 4ch, Voltage/ Current	
	Output: 2Ch Voltage/ Current	
XGF-H02A	Pulse [OC] input type, 2Ch	
XGF-HD2A	Pulse [LD] input type, 2Ch	
XGF-P01H-P04H	Open collector, 1-4axes	
XGF-PD1H-PD4H	Line drive, 1-4axes	
XGF-PN8A	LS Standard EtherCAT Net. 8axes	
XGF-PN4B	Standard EtherCAT Net. 4axes	
XGF-PN8B	Standard EtherCAT Net. 8axes	
XGF-PN16B	Standard EtherCAT Net. 16axes	
XGF-M32E	Standard EtherCAT Net. 8axes	
XGF-XM32E	Standard EtherCAT Net. 16axes	
XGF-TC4S	Thermocouple input, 4Ch	
XGF-RD4A	RTD input, 4Ch	
XGF-RD4S	RTD input, 4Ch [Insulated]	
XGF-TC4UD	Input: 4ch.(Voltage/Current, RTD/TC) Output: 8ch.[TR/Current] Controller: 4 loops	
XGF-TC4RT	Input: 4ch.[RTD] Output: 4ch.[TR] Controller: 4 loops	
XGF-SOEA	DC24V, 32points	
XGF-DL16A	USB2.0,CF2001,Max16Gbyte, 32 points 1 slot[Input 22 points, output 10 points]	
Communication module		
XGL-EOPCT	OPC UA, Twisted fair 2Ch	
XGL-EFBT	Master/Client, Twisted fair 2ch.	
XGL-EFMFB	Master/Client, Fiber optic 2ch.	
XGL-EFMHB	Master/Client, Twisted fair/fiber optic	
XGL-DBDT	Expansion driver - Twisted pair 2ch.	
XGL-DBDF	Expansion driver - Fiber optic 2ch.	
XGL-DBDH	Expansion driver - Fiber optic / Twisted pair	
XOL-ES4T	Stand alone switch twisted pair 4ch.	
XOL-ES4H	Stand alone switch twisted 2ch. fiber 2ch.	
XGL-EH5T	Open Ethernet switching hub	
XGL-CH2B	RS-232C 1ch, RS-422/485 1ch	
XGL-C22B	RS-232C 2ch	
XGL-C42B	RS-422/485 2ch	
XGL-DMEB	DeviceNet, Master	
XGL-DSEB	DeviceNet, Slave	
XGL-PMEB	Profibus-DP, Master	
XGL-PSRA	Profibus-DP Slave, Remote interface	
XGL-PSEA	Profibus-DP Slave	
XGL-RMEB	Rnet, Master, TP	
GOL-RR8T	Rnet stand alone repeater hub	
XGL-FMEA	Fnet, Master	
XGL-BIPT	BACnet client/server	
XGL-EIMT	RAPIEnet, Twisted fair 2Ch	
XGL-EIMF	RAPIEnet, Fiber optic 2Ch	
XGL-EIMH	RAPIEnet, Twisted fair, Fiber optic	
XGL-EIPT	Industrial Ethernet, Twisted fair 2Ch	

Specifications

Item	Description			Standard		
Ambient temperature	0 ~ 55 °C					
Storage temperature	-25 ~ +70 °C					
Ambient humidity	5 ~ 95%RH, (Non-condensing)					
Storage humidity	5 ~ 95%RH, (Non-condensing)					
Vibration resistance	Occasional vibration			-		
	Frequency	Acceleration	Pulse width			
	10 ≤ f < 57Hz	-	0.075mm			
	57 ≤ f < 150Hz	9.8m/s ² {1G}	-			
	Frequency	Acceleration	Pulse width			
	10 ≤ f < 57Hz	-	0.035mm			
	57 ≤ f < 150Hz	4.9m/s ² {0.5G}	-			
Shock resistance	• Peak acceleration: 147 m/s{15G} • Duration: 11ms • Half-sine, 3 times each direction per each axis			IEC 61131-2		
	Square wave impulse noise	± 1,500 V		LSIS Standard		
Noise resistance	Electrostatic discharge	± 4kV		IEC 61131-2, IEC 61000-4-2		
	Radiated electromagnetic field noise	27 ~ 500 MHz, 10 V/m		IEC 61131-2, IEC 61000-4-3		
	Fast transient / Burst noise	0.25kV		IEC 61131-2, IEC 61000-4-4		
Operating Ambience	Free from corrosive gases and excessive dust					
Altitude	Up to 2,000m					
Pollution degree	Less than equal to 2					
Cooling	Air-cooling					

* Pollution degree 2 is nonconductive pollution of the sort where occasionally a temporary conductivity caused by condensation must be expected.

XGK

Item		Description			Remarks	
		XGK-CPUUN	XGK-CPUHN	XGK-CPUSN		
Operation method		Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt				
I/O control method		Batch processing by scan synchronization (Refresh), Direct input/output by instruction				
Program language		Ladder diagram, Instruction list, SFC[Sequential Function Chart], ST[Structured Text]				
Number of instructions	Basic	40				
	Application	700				
Processing speed	LD	0.0085μs/Step				
	MOVE	0.255μs/Step				
	Real number operation	±: 182.2ns {S}, 327.3ns {D}				
		× : 336ns {S}, 427ns {D}			S: Single real number D: Double real number	
		÷ : 345ns {S}, 808ns {D}				
Program capacity		256Kstep [2,048KB]	128Kstep [1,024KB]	64Kstep [512KB]		
I/O points (available to install)		6,144	6,144	3,072		
Data area	P	P00000 ~ P4095F{65,536 points }				
	M	M00000 ~ M4095F{65,536 points }				
	K	K00000 ~ K4095F{65,536 points }				
	L	L0000 ~ L11263F{180,224 points }				
	F	F0000 ~ F4095F{65,536 points }				
	T	100ms : T0000 - T2999				
		10ms : T3000 - T5999			Timer (Adjustable)	
		1ms : T6000 - T7999				
		0.1ms : T8000 - T8191				
	C	C0000 ~ C4095				
	S	S00.00 ~ S255.99				
Flash area	D	D0000 ~ D524287		D0000 ~ D262143		
	U	U0.0-U7F.31		U0.0-U3F.31	Special module data refresh area	
	Z	256 points				
	N	N00000 ~ N21503				
Program type	R	16 block	8 block	2 block	32K word per 1 block(R0 ~ R32767)	
		2M byte, 32 blocks			Controllable by R device	
Operation mode	Total program	256				
	Initialization	1 {_INT}				
	Time-driven	32				
	Internal	32				
Self-diagnosis		RUN, STOP, DEBUG				
Programming port		Execution, Delay, Memory error, I/O error, Battery error, Power error			Modbus slave	
Data retention at power failure		Set "retain" at data declaration				
Max. expansion stage		7		3	Total length 15m	
Current consumption (mA)		960				
Weight (Kg)		0.12				

XGK

Item		Description					Remarks				
		XGK-CPUU	XGK-CPUH	XGK-CPUA	XGK-CPUS	XGK-CPUE					
Operation method		Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt					-				
I/O control method		Batch processing by scan synchronization (Refresh), Direct input/output by instruction					-				
Program language		Ladder diagram, Instruction list, SFC[Sequential Function Chart], ST[Structured Text]					-				
Number of instructions	Basic	40					-				
	Application	700					-				
Processing speed	LD	0.028 μ s/Step		0.084 μ s/Step		-					
	MOVE	0.084 μ s/Step		0.252 μ s/Step		-					
Real number operation		$\pm : 0.602\mu$ s [S], 1.078 μ s [D] $\times : 1.106\mu$ s [S], 2.394 μ s [D] $\div : 1.134\mu$ s [S], 2.66 μ s [D]		$\pm : 1.442\mu$ s [S], 2.87 μ s [D] $\times : 1.948\mu$ s [S], 4.186 μ s [D] $\div : 1.442\mu$ s [S], 4.2 μ s [D]		S: Single real number D: Double real number					
		128Kstep(512KB) 64Kstep(256KB)		32Kstep(128KB)		16Kstep(64KB)					
Program capacity		6,144		3,072		1,536					
I/O points (available to install)											
Data area	P	P00000 ~ P2047F(32,768 points)									
	M	M00000 ~ M2047F(32,768 points)									
	K	K00000 ~ K2047F(32,768 points)									
	L	L0000 ~ L11263F(180,224 points)									
	F	F0000 ~ F2047F(32,768 points)									
	T	10ms : T1000 - T1499 1ms : T2000 - T2047		100ms : T0000 - T0999 1ms : T1500 - T1999		Change area is available by Parameter setting					
	C	C0000 ~ C2047									
	S	S00.00 ~ S127.99									
	D	D0000 ~ D32,767		D0000 ~ D19,999							
	U	U0.0~U7F.31		U0.0~U3F.31		U0.0~U3F.31					
	Z	128 points									
	N	N00000 ~ N21503									
	R	2 block		1 block		32Kword per 1 block(R0~R32767)					
Flash area		2M byte, 32 blocks									
Program type	Total program	256									
	Initialization	1 [INT]									
	Time-driven	32									
	Internal	32									
Operation mode		RUN, STOP, DEBUG									
Self-diagnosis		Execution, Delay, Memory error, I/O error, Battery error, Power error									
Programming port		RS-232C [1Ch], USB [1Ch]									
Data retention at power failure		Set "retain" at data declaration									
Max. expansion stage		7		3		1					
Current consumption (mA)		960		940							
Weight (Kg)		0.12									

XGI-CPUZ

Item	XGI-CPUZ7	XGI-CPUZ5	XGI-CPUZ3	Note	
Operation method	Main task/Cycle task: Fixed period and cyclic operation Initialization task: Only once at the time of entering the RUN				
Control cycle	Main task time: 1ms ~ 1,000ms (1ms unit setting) Cycle task time: Multiple setting of main task (2~4,000ms)				
I/O control method	Synchronism with main task cyclic (Refresh method)				
Program language	Ladder diagram SFC (Sequential Function Chart) ST (Structured Text), G code				
Calculation processing speed (Basic Instructions)	Default(LD)	6.5 ns/command		6.5 ns/command	
	MOVE	5.2 ns/command		5.2 ns/command	
	Real calculation	±: 31 ns (S), 121 ns (D) ×: 31 ns (S), 119 ns (D) ÷: 34 ns (S), 142 ns (D)			S: Short real D: Long real Maximum performance condition
Program memory	Capacity	10MB: sequence+motion 10MB: NC control	4MB: sequence+motion 5MB: NC control	2MB: sequence+motion 5MB: NC control	
	Quantity		Max. 256		
Configuration of program		Initial program, main task program, periodic task program, NC program			
I/O Point(Installation available)		6,144 points			
Max. I/O memory contact		131,072 points			
Command	Operator	18			
	Basic function	202			
	Basic function block	174			
	Expansion function block	Socket, file function block			
	Dedicated function block	Dedicated function blocks by special modules, dedicated function block for communication module (P2P)			
Data memory	Automatic variable(A)	4MB (2MB retain)	2MB (1MB retain)	1MB (512KB retain)	
	Input variable(I)		20KB		
	Output variable(Q)		20KB		
	Direct variable	M	2MB (1MB retain)	1MB (512KB retain)	512KB (256KB retain)
		R		64KB x 32 block	
	Flag variable	W	2MB		Same area as
		F	128KB		System flag
		K	18KB		PID operation area
		L	22KB		High speed link flag
		N	49KB		P2P parameter
U	8KB		Analog data refresh area		
FLASH area		4 MB, 64 block		Control by R device	
Timer		No restriction on points Time range: 0.001~4,294,967.295sec (1,193hour)		Occupying 20 Byte of automatic variable area per point	
Counter		No restriction on points Coefficient range: 64 bit range		Occupying 20 Byte of automatic variable area per point	
Operation mode		RUN, STOP			
Restart mode		Cold, Warm			
Self-diagnosis function		Cyclic error monitoring, time share over detection of task program, detection of operation delay, memory error, input and output error, power error, etc.			
How to preserve data in case of power failure		Retain area setting in basic parameters or retain setting when setting variables			
Maximum extension base		7			
Motion control	Real/Virtual axes	Axis 32	Axis 16	Axis 8	
	Dedicated virtual axis	Axis 4	Axis 2	Axis 1	
	Slave (Real axis)	64 Slave	32 Slave	16 Slave	
	Communication		EtherCAT (CoE: CANopen over EtherCAT, FoE: File Access over EtherCAT)		
	Communication period		Same as the main task cycle		
	Servo drive support		Servo drive to support EtherCAT CoE		
	Control unit		pulse, mm, inch, degree		
	Control method		Position/velocity/torque (Servo drive support), synchronous, interpolation control		
	Position address range		± LREAL, 0		
	Speed range		± LREAL, 0		

Item		XGI-CPUZ7	XGI-CPUZ5	XGI-CPUZ3	Note		
Motion control	Torque unit	Rated torque % designation					
	Acc./Dec. processing	Trapezoid type, S-type (Setting by specifying Jerk at a function block)					
	Rage of Acc./Dec.	+ LREAL ^{*note1)} , 0					
	Manual Operation	Manual operation					
	Cam operation	32 profiles/32,768 points	16 profiles/16,384 points	8 profiles/8,192 points			
	Absolute position system	Available (When using an absolute encoder type servo drive)					
	Communication	Protocol	EtherCAT				
		Support specification	CoE (CANopen over EtherCAT), FoE (File Access over EtherCAT)				
		Physical layer	100BASE-TX				
		Communication speed	100Mbps				
		Topology	Daisy chain				
		Communication cable	Cat. 5 STP (Shielded twisted-pair) cable				
		Synchronous jitter between slaves	Less than 1 μs				
		Constant period communication	PDO (Process Data Object) Mapping through CoE				
		Non-synchronous communication	SDO (Service Data Object) communication through CoE				
		Max.transmission distance	100 m				
		Indicates the communication status	Front LED				
External memory	External input/output (EtherCAT Remote I/O)	Max. 64 slave supported	Max. 32 slave supported	Max. 16 slave supported			
	Coordinate system function (Robot)	Support robot	Cartesian, delta				
		Setting	XG5000				
		Control language	Function Block				
Built-in communication port	Memory type	Micro SD/SDHC					
	File system	FAT32					
	Maximum capacity	Mountable maximum capacity: Up to 512GB					
	Service	Program back-up/restoration, booting operation					
Built-in communication port	USB device	Characteristics	USB2.0, 1ch				
		Service	Loader service (XG5000)				
	USB host	Characteristics	USB 2.0, 1ch				
		Service	Supported devices: Wi-Fi Dongle				
	Wi-Fi	Characteristics	IEEE 802.11b/g/n		USB Wi-Fi Dongle function Provided by		
		Service	Loader service (XG5000) Web Server				
	Ethernet	Characteristics	1 Port				
			100/1000BASE-TX				
			Auto negotiation (Full-duplex and half duplex)				
			Auto MDIX crossover				
			Up to 100M distance between nodes				
			Use UTP, STP, FTP cable				
			Service setting in local Ethernet parameter of XG5000				
			Loader service (XG5000) (Multi-connection support, up to 4 people including USB)	Remote relay service supported Remote access service not supported			
			XGT server - dedicated communication	TCP supported UDP not supported			
			Third-party protocol support (MODBUS TCP server)				
			FTP server				
			NTP client				
			Web Server				
			Socket service (LS electric and third-party client service correspondence)	Socket function block			
Security		Project password TLS support: Loader service, Web server, FTP server					
Screen display		Character display					
Internal consumption current		1.3A					
Weight		230g					

*Note1) LREAL range: 2.2250738585072e-308 ~ 1.79769313486232e+308

Long real number(+LREAL) positive range: 0 < x ≤ 1.79769313486232e+308

XGI

Item	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS	XGI-CPUE	Remarks																																																																																													
Operation system	Reiterative operation, fixed cycle operation, constant scan																																																																																																			
I/O Control system	Scan synchronous batch processing system(refresh system), direct system by command																																																																																																			
Program language	Ladder Diagram, SFC (Sequential Function Chart), ST (Structured Text)																																																																																																			
Operation processing speed (basic command)	<table border="1"> <tr> <td>Operator</td><td>18</td></tr> <tr> <td>Basic function</td><td>136 types + real number operation function</td></tr> <tr> <td>Basic function block</td><td>43</td></tr> <tr> <td>Dedicated function block</td><td>Dedicated function blocks by special function modules, communication dedicated function block(P2P)</td></tr> <tr> <td>Basic</td><td>0.0085μs /step</td><td>0.028μs /step</td><td>0.084μs /step</td><td></td><td></td><td></td><td></td></tr> <tr> <td>MOVE</td><td>0.255μs /step</td><td>0.084μs /step</td><td>0.252μs /step</td><td></td><td></td><td></td><td></td></tr> <tr> <td>Real number operation</td><td> \pm : 0.119μs[S], 0.281μs[D] \times : 0.272μs[S], 0.680μs[D] \div : 0.281μs[S], 0.685μs[D] </td><td> \pm : 0.392μs[S], 0.924μs[D] \times : 0.896μs[S], 2.240μs[D] \div : 0.924μs[S], 2.254μs[D] </td><td> \pm : 1.442μs[S], 2.87μs[D] \times : 1.948μs[S], 4.186μs[D] \div : 1.442μs[S], 4.2μs[D] </td><td>S: Single real number D: Double real number</td><td></td><td></td><td></td></tr> </table>								Operator	18	Basic function	136 types + real number operation function	Basic function block	43	Dedicated function block	Dedicated function blocks by special function modules, communication dedicated function block(P2P)	Basic	0.0085 μ s /step	0.028 μ s /step	0.084 μ s /step					MOVE	0.255 μ s /step	0.084 μ s /step	0.252 μ s /step					Real number operation	\pm : 0.119 μ s[S], 0.281 μ s[D] \times : 0.272 μ s[S], 0.680 μ s[D] \div : 0.281 μ s[S], 0.685 μ s[D]	\pm : 0.392 μ s[S], 0.924 μ s[D] \times : 0.896 μ s[S], 2.240 μ s[D] \div : 0.924 μ s[S], 2.254 μ s[D]	\pm : 1.442 μ s[S], 2.87 μ s[D] \times : 1.948 μ s[S], 4.186 μ s[D] \div : 1.442 μ s[S], 4.2 μ s[D]	S: Single real number D: Double real number																																																															
Operator	18																																																																																																			
Basic function	136 types + real number operation function																																																																																																			
Basic function block	43																																																																																																			
Dedicated function block	Dedicated function blocks by special function modules, communication dedicated function block(P2P)																																																																																																			
Basic	0.0085 μ s /step	0.028 μ s /step	0.084 μ s /step																																																																																																	
MOVE	0.255 μ s /step	0.084 μ s /step	0.252 μ s /step																																																																																																	
Real number operation	\pm : 0.119 μ s[S], 0.281 μ s[D] \times : 0.272 μ s[S], 0.680 μ s[D] \div : 0.281 μ s[S], 0.685 μ s[D]	\pm : 0.392 μ s[S], 0.924 μ s[D] \times : 0.896 μ s[S], 2.240 μ s[D] \div : 0.924 μ s[S], 2.254 μ s[D]	\pm : 1.442 μ s[S], 2.87 μ s[D] \times : 1.948 μ s[S], 4.186 μ s[D] \div : 1.442 μ s[S], 4.2 μ s[D]	S: Single real number D: Double real number																																																																																																
Program memory capacity	2M	1M	512KB	128KB	64KB																																																																																															
I/O points (installable)	6,144 points			3,072 points	1,536 points																																																																																															
Max. I/O memory contact	131,072 points			32,768 points																																																																																																
Data memory	<table border="1"> <tr> <td>Symbolic variable area(A)</td><td>1024KB (max. 512KB retain settable)</td><td>512KB (max. 256KB retain settable)</td><td>128KB (max. 64KB retain settable)</td><td>64KB (max. 32KB retain settable)</td><td></td><td></td><td></td></tr> <tr> <td>I variable(I)</td><td colspan="3">16KB</td><td colspan="3">4KB</td><td></td></tr> <tr> <td>Q variable(Q)</td><td colspan="3">16KB</td><td colspan="3">4KB</td><td></td></tr> <tr> <td>Direct variable</td><td>M</td><td>512KB (max. 256KB retain settable)</td><td>256KB (max. 128KB retain settable)</td><td>64KB (max. 32KB retain settable)</td><td>32KB (max. 16KB retain settable)</td><td></td><td></td></tr> <tr> <td></td><td>R</td><td>64KB × 16block</td><td>64KB × 2block</td><td>64KB × 1block</td><td>32KB × 1block</td><td></td><td></td></tr> <tr> <td></td><td>W</td><td>1,024KB</td><td>128KB</td><td>64KByte</td><td>32KByte</td><td>R</td><td></td></tr> <tr> <td>Flag variable</td><td>F</td><td>8KB</td><td colspan="3">4KB</td><td>System flag</td><td></td></tr> <tr> <td></td><td>K</td><td colspan="3">16KB</td><td colspan="3">4KB</td><td>PID flag</td></tr> <tr> <td></td><td>L</td><td colspan="3">22KB</td><td colspan="3"></td><td>High speed link flag</td></tr> <tr> <td></td><td>N</td><td colspan="3">42KB</td><td colspan="3"></td><td>P2P Parameters</td></tr> <tr> <td></td><td>U</td><td colspan="2" rowspan="4">8KB</td><td>4KB</td><td>2KB</td><td colspan="2" rowspan="12">Analog data Refresh</td><td></td></tr> </table>								Symbolic variable area(A)	1024KB (max. 512KB retain settable)	512KB (max. 256KB retain settable)	128KB (max. 64KB retain settable)	64KB (max. 32KB retain settable)				I variable(I)	16KB			4KB				Q variable(Q)	16KB			4KB				Direct variable	M	512KB (max. 256KB retain settable)	256KB (max. 128KB retain settable)	64KB (max. 32KB retain settable)	32KB (max. 16KB retain settable)				R	64KB × 16block	64KB × 2block	64KB × 1block	32KB × 1block				W	1,024KB	128KB	64KByte	32KByte	R		Flag variable	F	8KB	4KB			System flag			K	16KB			4KB			PID flag		L	22KB						High speed link flag		N	42KB						P2P Parameters		U	8KB		4KB	2KB	Analog data Refresh		
Symbolic variable area(A)	1024KB (max. 512KB retain settable)	512KB (max. 256KB retain settable)	128KB (max. 64KB retain settable)	64KB (max. 32KB retain settable)																																																																																																
I variable(I)	16KB			4KB																																																																																																
Q variable(Q)	16KB			4KB																																																																																																
Direct variable	M	512KB (max. 256KB retain settable)	256KB (max. 128KB retain settable)	64KB (max. 32KB retain settable)	32KB (max. 16KB retain settable)																																																																																															
	R	64KB × 16block	64KB × 2block	64KB × 1block	32KB × 1block																																																																																															
	W	1,024KB	128KB	64KByte	32KByte	R																																																																																														
Flag variable	F	8KB	4KB			System flag																																																																																														
	K	16KB			4KB			PID flag																																																																																												
	L	22KB						High speed link flag																																																																																												
	N	42KB						P2P Parameters																																																																																												
	U	8KB		4KB	2KB	Analog data Refresh																																																																																														
Flash area	2MB, 32block																																																																																																			
Timer	No point limit Time range: 0.001~ 4,294,967.295 second(1,193 hours)																																																																																																			
Counter	No point limit Coefficient range : 64 bit expression																																																																																																			
Program structure	Total no. of programs	256																																																																																																		
	Initialization task	1																																																																																																		
	Fixed cycle task	32																																																																																																		
	Internal device task	32																																																																																																		
Operation mode	RUN, STOP, DEBUG																																																																																																			
Restart mode	Cold, Warm																																																																																																			
Self diagnosis	Operation delay monitoring, memory fault, I/O fault, battery fault, power fault and etc																																																																																																			
Data protection in case of power failure	Retain area setting by basic parameters																																																																																																			
Max. base extension	7			3	1	Total length 15m																																																																																														
Current consumption (mA)	960mA			940mA																																																																																																
Weight (kg)	0.12kg																																																																																																			

XGK/XGI
CPU built-in
Ethernet
specification

Item	XGK-CPUSN, CPUHN, CPUUN / XGI-CPUUN	Remarks
Ethernet Feature	1 Port	-
	10/100BASE-TX	-
	Auto negotiation (Full-duplex and half duplex)	-
	Auto MDIX Crossover	-
	Max. Support 4 channel	Support 8Kbyte each send and receive channel
	Max. Distance between nodes : 100m	-
	Max. Protocol size : 1500Byte	IP Fragmentation is not supported.
Ethernet Service	Cable	UTP, STP, FTP cables is available Setting communication parameters with XG5000
	Service	Loader service (XG5000 connection) supported LS protocol(XGT) supported.
		Remote stage 1 connection with PLC is available Server & TCP supported. Client & UDP not supported.
		Other company's protocol (Modbus TCP/IP) supported

XGK system configuration


Item	XGK-CPUE	XGK-CPUS, CPUSN	XGK-CPUA	XGK-CPUH, CPUHN	XGK-CPUU, CPUUN																																																																
Max. expansion stage	1 Stage	3 Stage	3 Stage	7 Stage	7 Stage																																																																
Max. installation of module	24 Module	48 Module	48 Module	96 Module	96 Module																																																																
Max. number of I/O point	1,536 Points	3,072 Points	3,072 Points	6,144 Points	6,144 Points																																																																
Max. expansion distance			15m																																																																		
Assignment of I/O number (Fixed)		<ul style="list-style-type: none"> 64 points are assigned to each slot of base regardless of installation of module. I/O numbers equivalent to 12 slots are assigned to a base. The starting number of base 0 is P0000. <p>Refer to the following figure regarding the I/O number assignment of 12 slots</p> <table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>32 points</th> </tr> <tr> <th>Power</th><th>CPU</th><th>16 points</th><th>16 points</th><th>32 points</th><th>64 points</th><th>16 points</th><th>32 points</th><th>32 points</th><th>64 points</th><th>32 points</th><th>16 points</th><th>32 points</th><th>32 points</th> </tr> </thead> <tbody> <tr> <td>P00</td><td>P40</td><td>P80</td><td>P120</td><td>P160</td><td>P200</td><td>P240</td><td>P280</td><td>P320</td><td>P360</td><td>P400</td><td>P440</td><td>P480</td> </tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td> </tr> <tr> <td>P2F</td><td>P7F</td><td>P11F</td><td>P15F</td><td>P19F</td><td>P23F</td><td>P27F</td><td>P31F</td><td>P35F</td><td>P39F</td><td>P43F</td><td>P47F</td><td>-</td> </tr> </tbody> </table>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points	Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points	P00	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440	P480	-	-	-	-	-	-	-	-	-	-	-	-	-	P2F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F	-
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points																																																								
Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																								
P00	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440	P480																																																									
-	-	-	-	-	-	-	-	-	-	-	-	-																																																									
P2F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F	-																																																									
I/O assignment (Variable)		<ul style="list-style-type: none"> I/O point is assigned automatically according to the installed module. I/O parameter is used to install modules. The starting number of base 0 is P0000. 16 points are assigned automatically to the slot of special or communication module <p>Refer to the following figure regarding the I/O number assignment of 12 slots</p> <table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>32 points</th> </tr> <tr> <th>Power</th><th>CPU</th><th>16 points</th><th>16 points</th><th>32 points</th><th>64 points</th><th>16 points</th><th>32 points</th><th>32 points</th><th>64 points</th><th>32 points</th><th>16 points</th><th>32 points</th><th>32 points</th> </tr> </thead> <tbody> <tr> <td>P00</td><td>P10</td><td>P20</td><td>P40</td><td>P80</td><td>P90</td><td>P110</td><td>P130</td><td>P170</td><td>P190</td><td>P200</td><td>P220</td><td>P240</td> </tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td> </tr> <tr> <td>P0F</td><td>P1F</td><td>P2F</td><td>P7F</td><td>P8F</td><td>P10F</td><td>P12F</td><td>P14F</td><td>P18F</td><td>P19F</td><td>P21F</td><td>P22F</td><td>-</td> </tr> </tbody> </table>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points	Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points	P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220	P240	-	-	-	-	-	-	-	-	-	-	-	-	-	P0F	P1F	P2F	P7F	P8F	P10F	P12F	P14F	P18F	P19F	P21F	P22F	-
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points																																																								
Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																								
P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220	P240																																																									
-	-	-	-	-	-	-	-	-	-	-	-	-																																																									
P0F	P1F	P2F	P7F	P8F	P10F	P12F	P14F	P18F	P19F	P21F	P22F	-																																																									

XGI system configuration

Item	XGI-CPUU, CPUH, CPUUD, CPUUN	XGI-CPUS	XGI-CPUE																																																																																				
Max. expansion stage	7 Stage	3 Stage	1 Stage																																																																																				
Max. installation of module	96 Module	48 Module	24 Module																																																																																				
Max. number of I/O point	16 point : 1,536 Points 32 point : 3,072 Points 64 point : 6,144 Points	16 point : 768 Points 32 point : 1,536 Points 64 point : 3,072 Points	16 point : 384 Points 32 point : 768 Points 64 point : 1,536 Points																																																																																				
Max. expansion distance		15m																																																																																					
I/O assignment		<ul style="list-style-type: none"> 64 points are assigned to each slot of base regardless of installation of module. No limit in installation of special module Special module is controlled by function block and the memory assignment is done automatically <p>Refer to the following figure regarding the I/O assignment of 12 slots</p> <table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>32 points</th> </tr> <tr> <th>Power</th><th>CPU</th><th>16 points</th><th>16 points</th><th>32 points</th><th>64 points</th><th>16 points</th><th>32 points</th><th>32 points</th><th>64 points</th><th>32 points</th><th>16 points</th><th>32 points</th><th>32 points</th> </tr> </thead> <tbody> <tr> <td>% I x 0.8.0-31</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>%Qx 0.9.0-15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>%Qx 0.10.0-31</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>%Qx 0.11.0-31</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points	Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points	% I x 0.8.0-31														%Qx 0.9.0-15														%Qx 0.10.0-31														%Qx 0.11.0-31														
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	32 points																																																																										
Power	CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																																										
% I x 0.8.0-31																																																																																							
%Qx 0.9.0-15																																																																																							
%Qx 0.10.0-31																																																																																							
%Qx 0.11.0-31																																																																																							

Expansion system composition

1. The following figure is the example of expansion system with the fixed I/O point type of XGK-CPUH.
2. The address of I/O point is adjustable by XG5000 parameter.

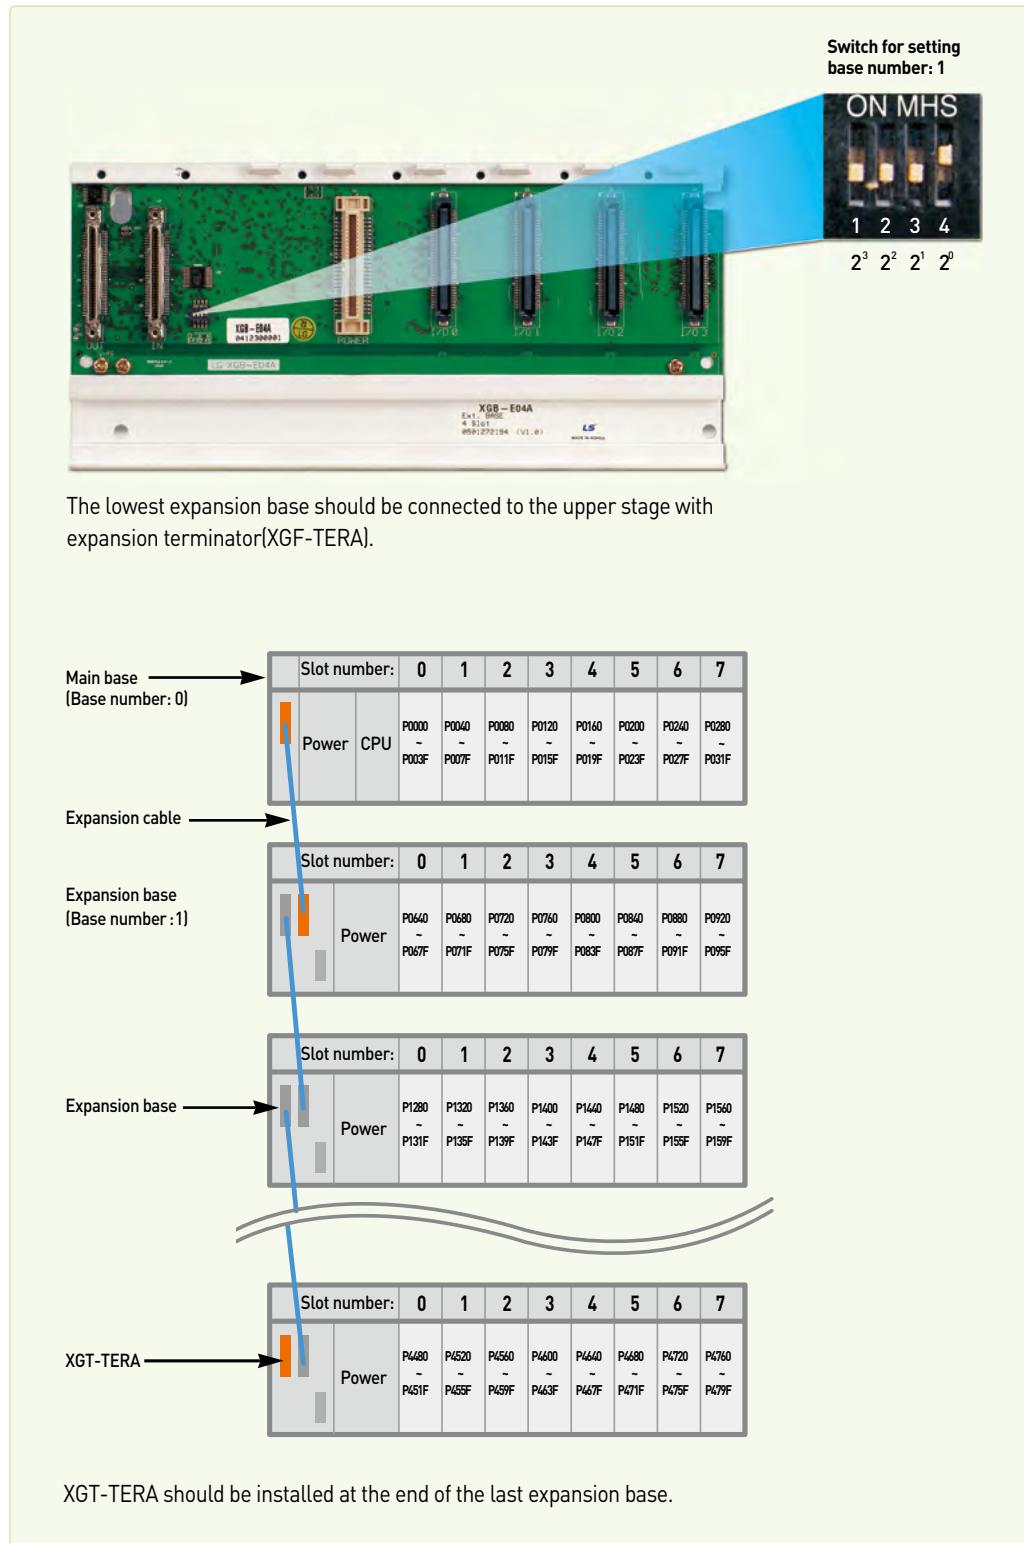

Features

- 8, 16, 32, 64 points I/O module
- Operation monitoring by LED display
- Easy maintenance: Terminal block type, one-touch installation of module



Input module specifications

Item		DC input						AC input							
Type		XGI-D21A	XGI-D22A	XGI-D22B	XGI-D24A	XGI-D24B	XGI-D28A	XGI-D28B	XGI-A12A	XGI-A21A	XGI-A21C				
Input point		8	16		32		64		16	8	8				
Rated input voltage		DC24V			AC100-120V			Free voltage	DC100/240V						
Rated input current		4mA			8mA			17mA	17mA						
ON voltage/current		19V or more / 3mA or less			AC80V or more / 5mA or less			AC130V or more / 10mA or less	AC80V or more / 5mA or less						
OFF voltage/current		DC11V or more / 1.7mA or less			AC60V or more / 5mA or less			AC60V or more / 2mA or less	AC30V or more / 1mA or less						
Response	Off→On	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						15mA or less							
	On→Off	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						25mA or less							
Common (COM)		8 points/COM	16 points/COM		32 points/COM		16 points/COM	8 points/COM	1 points/COM						
Insulation method		Photocoupler						Photocoupler							
Current consumption (mA)		20	30	50	60		30	20	20						
Weight (Kg)		0.1	0.12		0.1		0.15	0.13	0.13	0.13					

Output module specifications












Item		Relay			Transistor			Triac				
Type		XGQ-RY1A	XGQ-RY2A	XGQ-RY2B	XGQ-TR1C	XGQ-TR2A	XGQ-TR2B	XGQ-TR4A	XGQ-TR4B	XGQ-TR8A	XGQ-TR8B	XGQ-SS2A
Ouput point		8	16		8	16		32		64		16
Rated input voltage		DC12/24V, AC110/220V			DC12/24V			AC110/220V				
Rated input current	1 Point	2A		2A	0.5A	0.1A			0.6A			
	Common	5A		0.1A	4A	2A			4A			
Response time	Off→On	10ms or less		3ms or less	1ms or less			1ms or less			1ms or less	
	On→Off	12ms or less		10ms or less	1ms or less			0.5cycle +1ms or less				
Common (COM)		1 point/COM	16 points/COM	1 points/COM	32 points/COM			16 points/COM				
Insulation method		Relay			Photocoupler							
Current consumption (mA)		260	500	100	70	130	230	300				
Weight (Kg)		0.13	0.17	0.19	0.11	0.11	0.1	0.15	0.2			
Surge killer		-	Varistor	Zener diode			Varistor					
External power supply		-	DC12/24V	DC			-					

Note] B1, B2 of 32, 62 points terminal [connector] are shorted inside of the product.

Wiring diagram for input modules

XGI-D21A	XGI-D22A	XGI-D22B	XGI-D24A
XGI-D24B	XGI-D28A	XGI-D28B	
XGI-A12A	XGI-A21A	XGI-A21C	


Wiring diagram for output modules

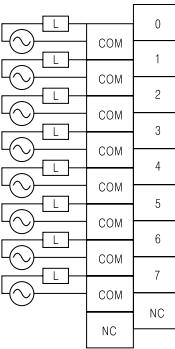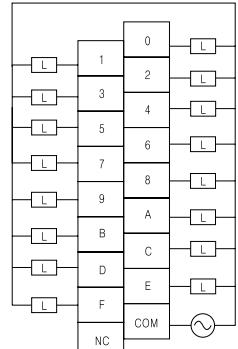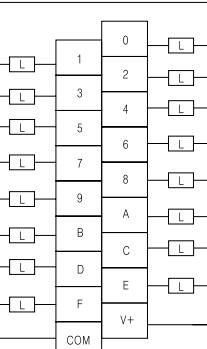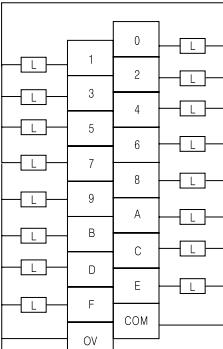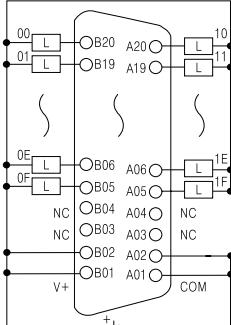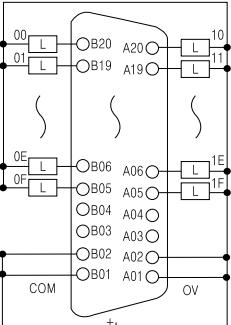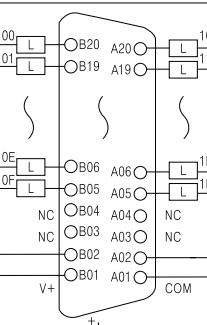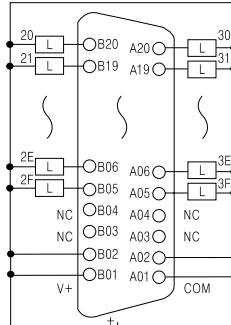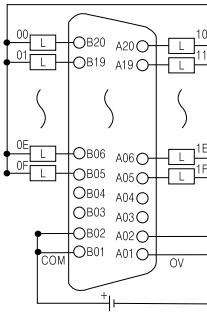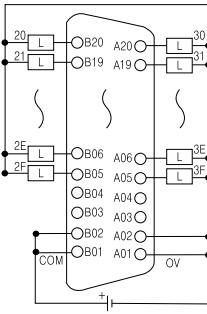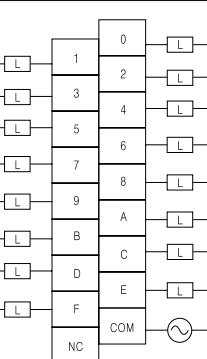XGQ-RY1A	XGQ-RY2A/B	XGQ-TR2A	XGQ-TR2B
			
XGQ-TR4A	XGQ-TR4B	XGQ-TR8A	
			
XGQ-TR8B	XGQ-SS2A	XGF-TR1C	
			




Diagnostic Digital Input Module(XGI-D21D)

- Diagnostic Digital Input module receives and processes DC 24V input signal.
It has a wire break detection function of each input signal.
- Input signal and wire break detection signal are displayed on the device
of the CPU module, it can be used in the PLC program.

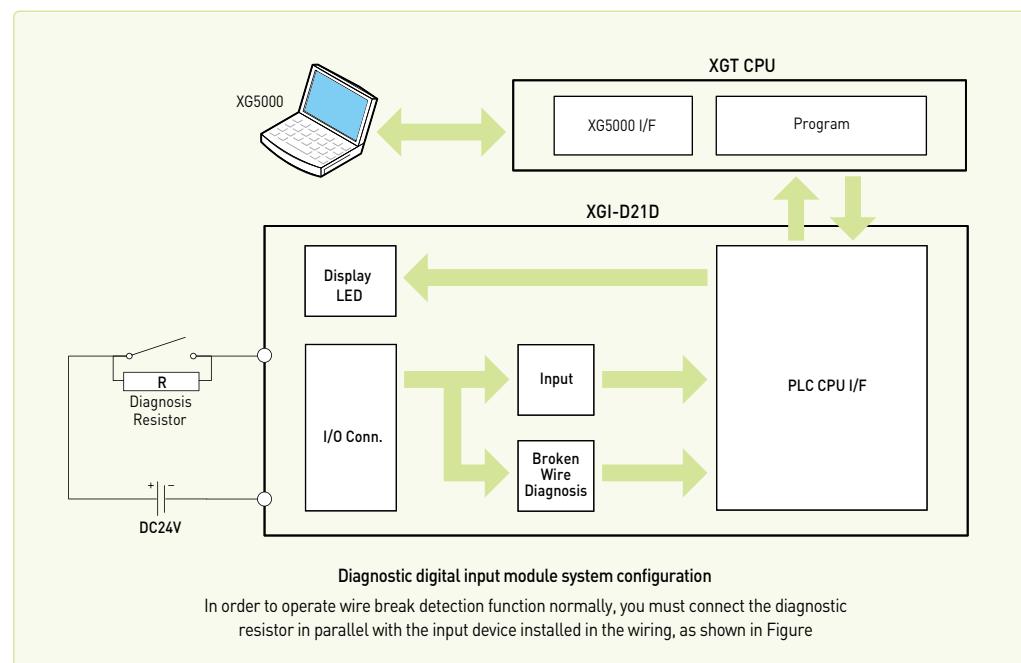

Specifications

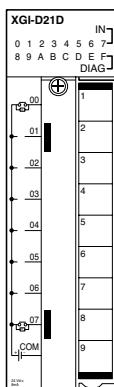


IN: Input status(0-7)

- On: Input On
 - Off: Input Off
- DIAG: Diagnosis status(8-F)
- On: broken wire occurs
 - Off: Normal state


Item		Specifications
Input point		8 points
Insulation method		Photo coupler insulation
Rated input voltage / current		DC24V / Approx. 8mA
Voltage range		DC20.4~28.8V (5% and lower ripple rate)
On voltage / On current		19V and higher / 5.2mA and higher
Off voltage / On current		11V and lower / 4.7mA and lower
Response time	Off→On (Input filter)	1ms/3ms/5ms/10ms/20ms/70ms/100ms, Initial value:3ms
	On→Off	1ms/3ms/5ms/10ms/20ms/70ms/100ms, Initial value:3ms
Insulation withstand voltage		DC 500V
Insulation resistance		10 MΩ and higher by Insulation ohmmeter
Diagnosis function		Wire break detection
Common method		8 point / 1COM
Suitable cable size		Stranded cable between 0.3-0.75mm² (2.8mm and smaller outer dia.)
Suitable clamped terminal		R1.25-3 (Sleeve built-in clamped terminal is not available)
Current consumption(mA)		60mA
Operation display		LED On with input On LED On during wire break
External connection method		9 point Terminal strip connector (M3 X 6 screws)
Weight		95g

Diagnostic Digital Output Module(XGQ-RY1D)

- Diagnostic digital output module outputs output signal via the relay to the outside.
It has a diagnostic function of the internal signal and wire break detection for each output signal.
- Diagnostic signals are displayed on the device of the CPU module, it can be used in the PLC program.

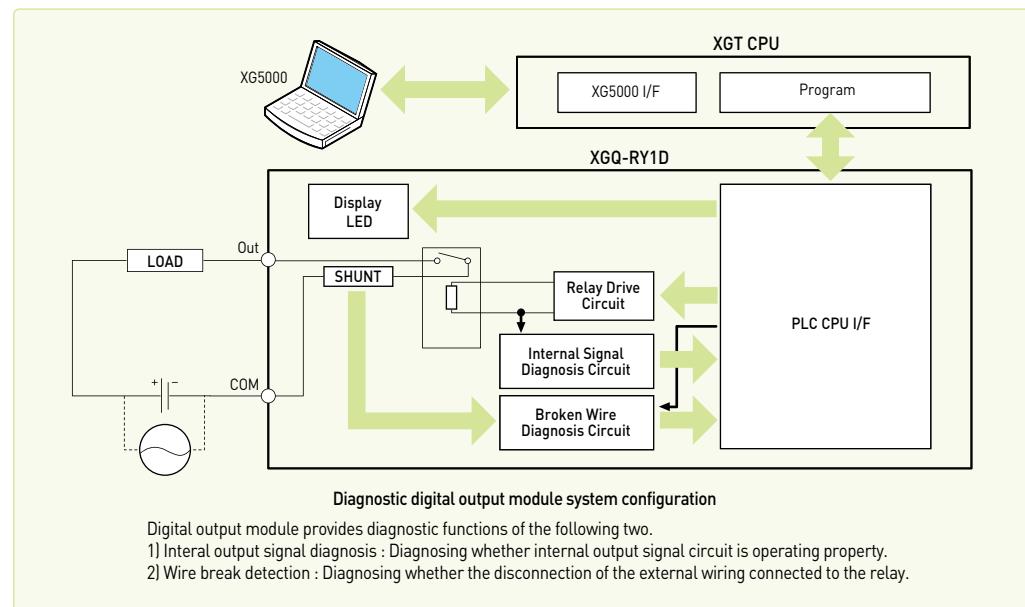

Specifications

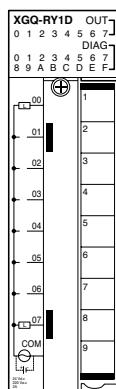

- OUT:** Output status [0 ~ 7]
- On: Relay output On
 - Off: Relay output Off
- DIAG :** Diagnosis status
Internal output signal diagnosis [0 ~ 7]
- On: Internal output signal fail
 - Off: Normal state
- Wire break detection(8~F)**
- On: broken wire occurs
 - Off: Normal state


Item		Specifications
Output point		8 points
Insulation method		Relay insulation Photo coupler insulation
Rated load voltage		DC24V (resistance load) / AC220V [$\cos \varphi = 1$]
Rated load current	1point	2A
	Common	5A
Min. load voltage / current		DC5V / 1mA
Max. load voltage / current		AC250V, DC125V / 2A
Leakage current at Off		0.1mA (AC220V, 60Hz)
Max. switching frequency		1,800 times/hour
Surge killer		None
Life	Mechanical	
	20 million and more times	
	Rated load voltage/current 100 thousand and more times	
	AC200V / 1.5A, AC240V / 1A [$\cos \varphi = 0.7$] 100 thousand and more times	
Response time	Electrical	
	AC200V / 1A, AC240V / 0.5A [$\cos \varphi = 0.35$] 100 thousand and more times	
	DC24V / 1A, DC100V / 0.1A [$L / R = 7ms$] 100 thousand and more times	
	10ms and lower	
Diagnosis function		12ms and lower
Common method		Wire break detection
Current consumption(mA)		Internal output signal diagnosis
Operation display		8 point/1COM
		Max. 400mA
External connection method		LED On with output On
		LED On during wire break
		LED On when the internal output signal fail
Weight		9 point Terminal strip connector (M3 X 6 screws)
		145g

CPU

Input/output mixed Type (XGH-DT4A)

Input		Output	
Input points	16 points	Input points	16 points
Insulation method	Photo coupler	Insulation method	Photo coupler
Rated input voltage	DC24V	Rated input voltage	DC12/24V
Rated input current	4mA	Rated input current	DC10.2~26.4V
Input voltage range	DC20.4~28.8V	Input voltage range	0.1A/point, 1.6A/COM
Insulation pressure	AC560Vrms / 3Cycle	Insulation pressure	0.1mA or less
On voltage/current	DC19V or more / 3mA or more	On voltage/current	0.7A/10ms or less
Off voltage/current	DC11V or more / 1.7mA or more	Off voltage/current	Zener diode
Input resistance	5.6MΩ	Input resistance	DC 0.2V or less
Response	Off→On 1ms/3ms/5ms/10ms/20ms/70ms/100ms (Setting by CPU parameter)	Response	Off→On 1ms or less
	Initial value: 3ms		On→Off 1ms or less (rated load, resistance load)
Common (COM)	1ms/3ms/5ms/10ms/20ms/70ms/100ms (Setting by CPU parameter)	Common (COM)	16 points/COM
	Initial value: 3ms		LED lighting when output is ON
Operation display		Internal current consumption	100mA
External connection		External connection	40-point connector
Weight (kg)			0.1


Wiring diagram for mixed type

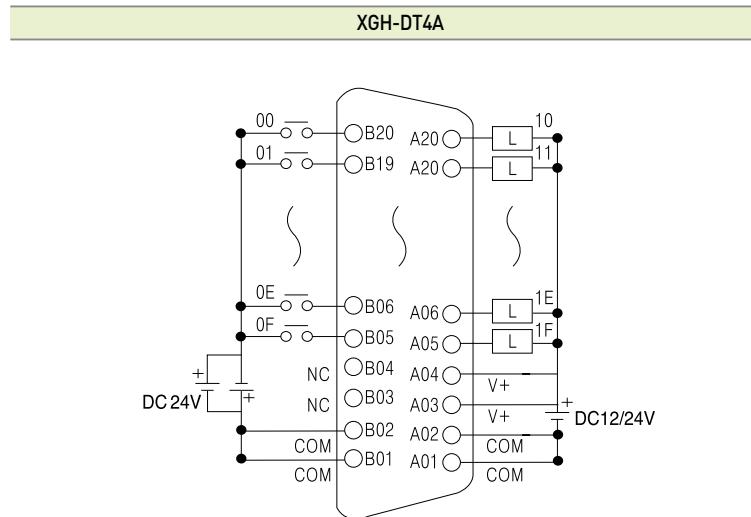


NOTE) Input address for XGK CPU is P00-P0F and Output address is P10-P1F when it is installed on the slot 0.
Input address for XGI CPU is %IX0.0.0-%IX0.0.15 and Output address is %QX0.0.16-%QX0.0.31

Precaution during installation of I/O module


- XGT has 2 kinds of digital input type: Current sink input, Current source input. For DC input module has different wiring depending on the input type, digital input type should be selected with consideration about connected input device.
- Max. number of simultaneous input point differs according to the module type. Therefore, review specification of input module before its application.
- Use an interrupt module when a response of high-speed input is demanded. But only one interrupt module can be installed per CPU module.
- If switching frequency is high or inductive switching load is used, the lifespan of relay output module will be reduced. Therefore, it is recommended to use transistor output module or triac output module.
- When driving an inductive load with output module, set the maximum switching frequency as 'ON' for 1 second and 'OFF' for 1 second.
- When using counter or timer with DC/DC converter, it is possible to have inrush current which cause a break down. Therefore to reduce an effect of inrush current, connect resistor or inductor to load or use the module whose max. load current is high.

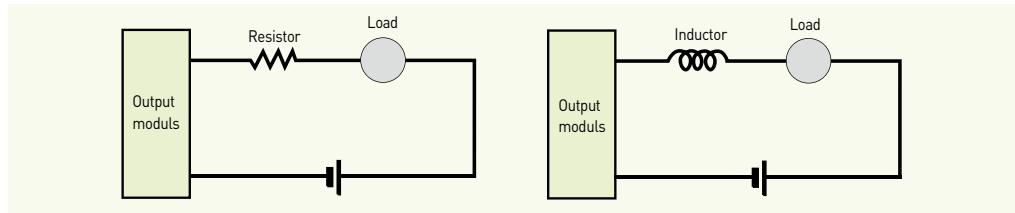

- Fuse of output module is not exchangeable to prevent a damage of external wiring when output module has a short-circuit.
- The number of simultaneous 'ON' points varies depending on input voltage, ambient temperature. Refer to the specification of input module.
- The following graph presents the relay lifespan of relay output module. It shows the maximum lifespan of relay which is used in the relay output.

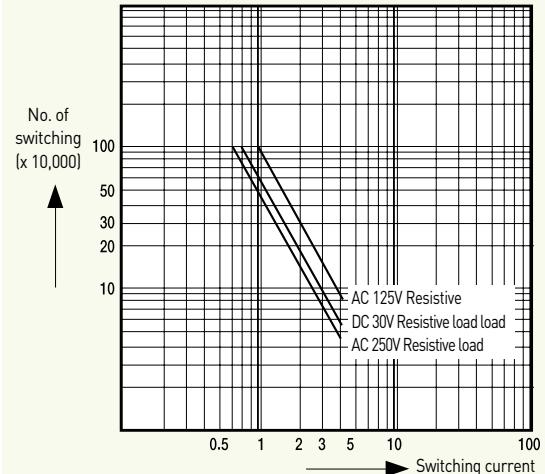

- Compressed terminal attaching sleeve cannot be mounted to XGT terminal block. The following picture shows appropriate compressed terminals for terminal block.

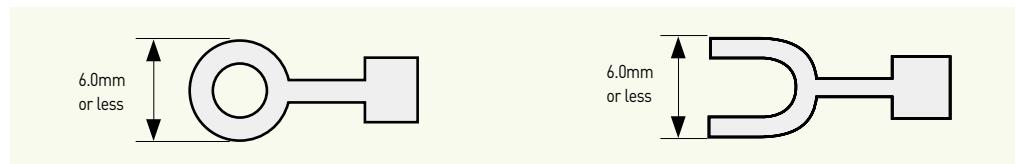

- Use 0.3~0.75mm twisted pair, below 2.8mm thickness cable for connecting to terminal block.
- Be careful when choosing and using the cable since the permissible current differs according to the insulation thickness.
- Joint torque of fixed screw and terminal block screw of the module needs to be within the range in the following table.

Joint	Joint torque range
I/O module terminal block screw (M3)	42~58 N·cm
I/O module terminal block fixed screw (M3)	68~89 N·cm

- Thermal protector is built in transistor module. Thermal protector is a function that protects PLC from an overload and overheating.





XGR Redundancy System

Redundancy system for high-speed process control based on IEC


- Processing speed: 42ns/step
- I/O Points: Max. 131,072
- Total memory: 25MB (Program 7MB, Data 2MB, Flash 16MB)
- Switching over time: Min 4.3ms, Max 22ms
- Built-in 256 PID loops control

Contents	
34	XGR Configuration
36	System configuration
38	Application




XGR Configuration

- Base, Power, CPU, Network redundancy
- Dual port and 3 kinds of media (Twisted-Twisted, Optic-Optic, Twisted-Optic)

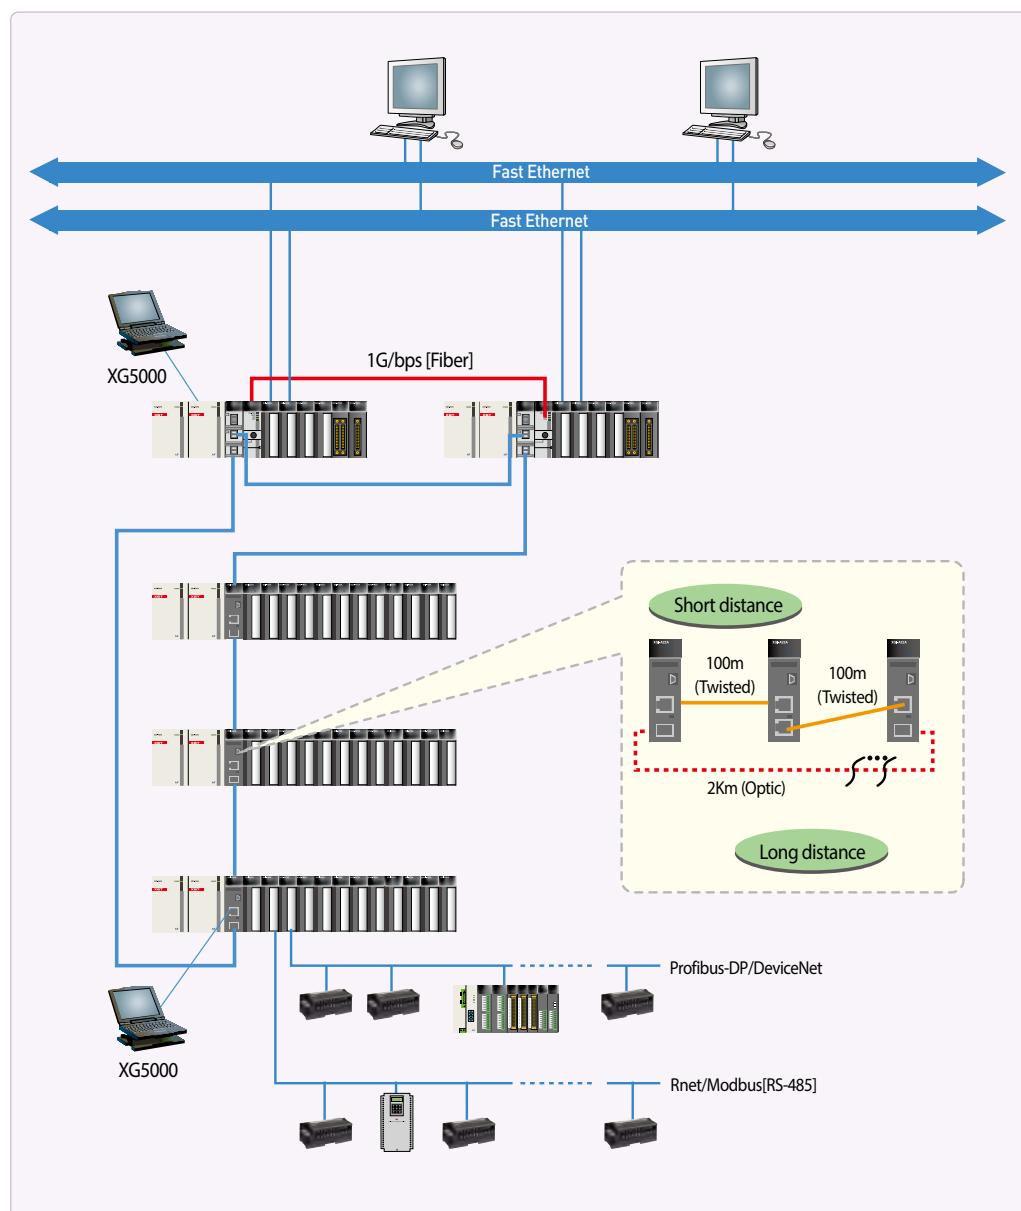


System configuration method


Fiber-optic

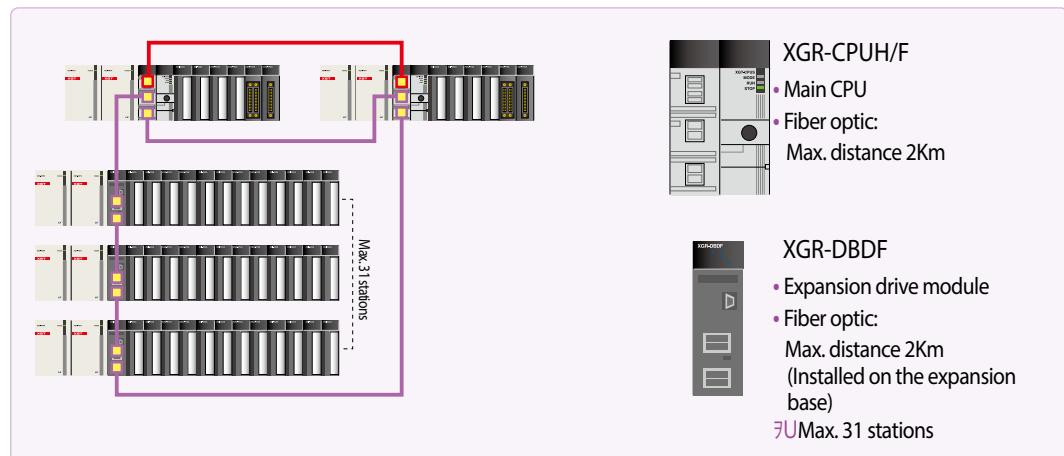

Twisted pair

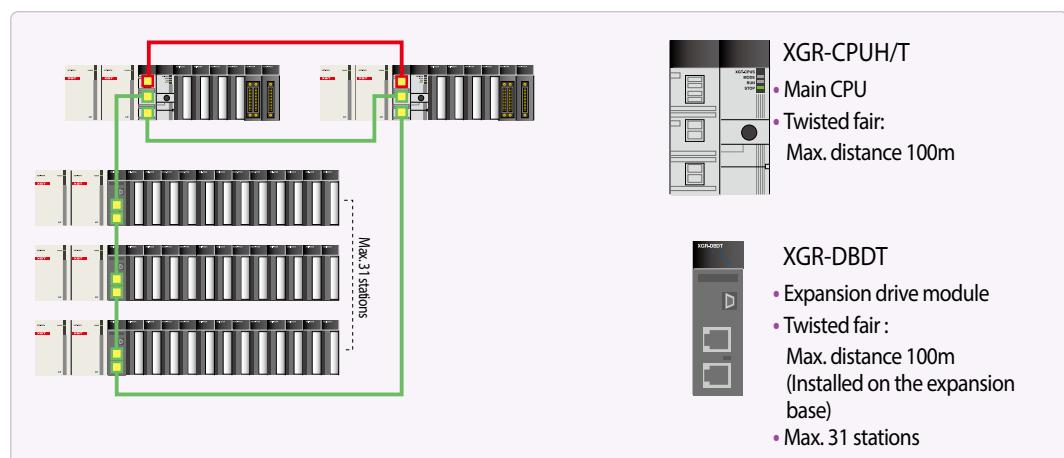


Hybrid (Twisted pair + Fiber Optic)

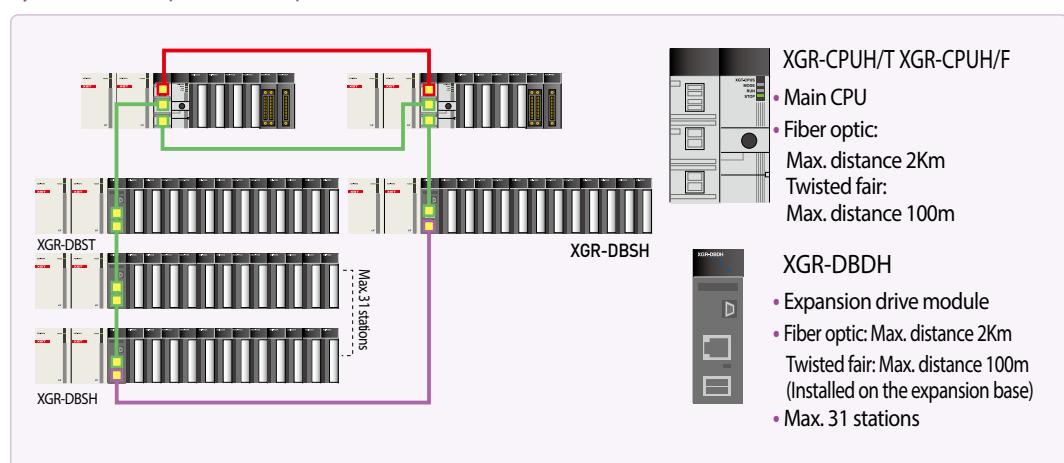

* Max. expandable distance: Fiber optic 60km, Twisted fair 3km
 * CPU synchronization cable: 2m, 5m

System configuration

System configuration

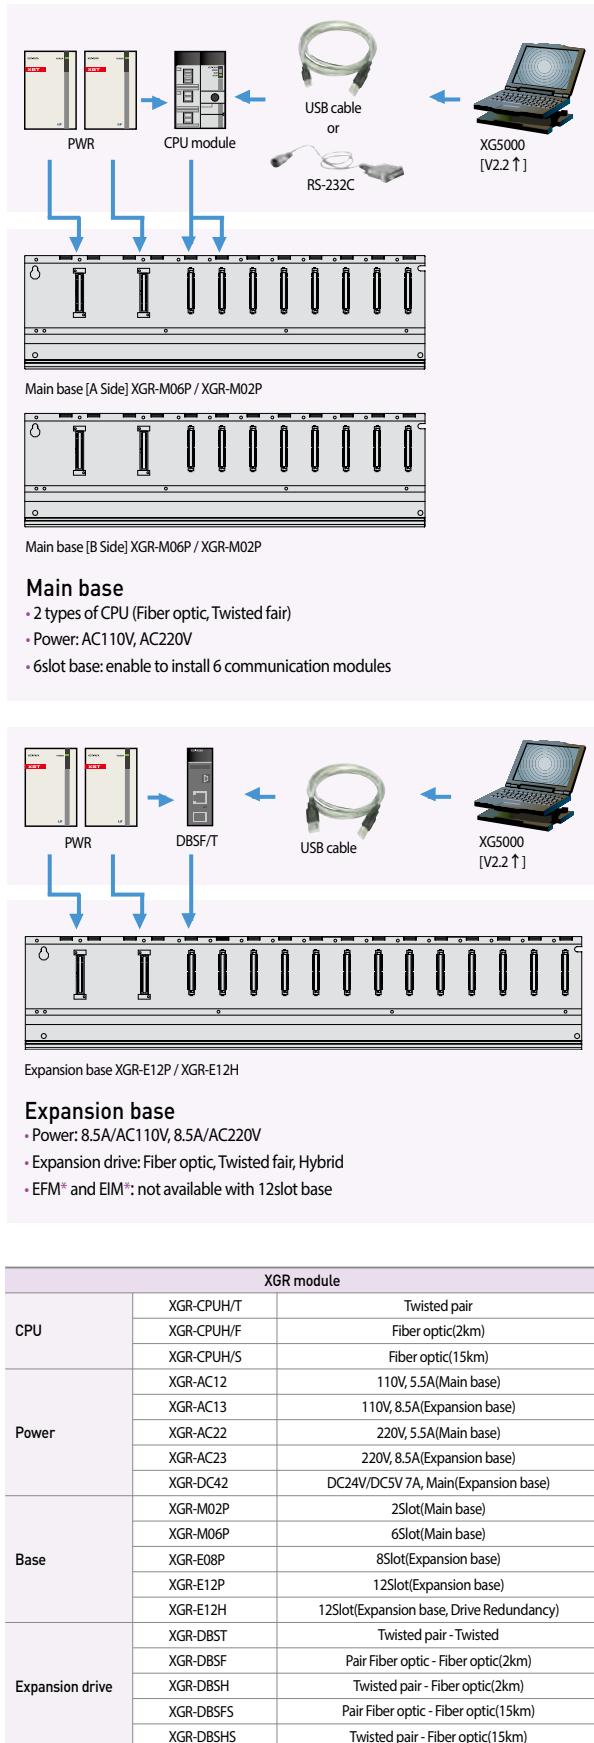

Specification

Item		Description		Remark
		XGR-CPUH/F	XGR-CPUH/T	
Media		Fiber optic	Twisted pair	
Operation method		Cyclic execution, Periodic operation, Interrupt operation, Fixed scan		
I/O control method		Scan synchronized batch processing method (Refresh method)		
Program language		LD (Ladder Diagram), ST (Structured Text), SFC (Sequential Function Chart), IL (Read only)		
Number of Instructions	Operator	18		
	Standard function	130 + Real type function		
	Standard function block	41		
Special function/ function block		Special function block, Process control function block		
Processing speed	LD	0.042μs/Step		
	MOV	0.126μs/Step		
	Real type	±: 0.602μs(S), 1.078μs(D) × : 1.106μs(S), 2.394μs(D) ÷ : 1.134μs(S), 2.66 μs(D)		S: Real type D: Long real type
I/O points		I: 131,072 points, Q: 131,072 points (Total: 1131,072)		
DRAM	Program memory	7MB		Including Upload, Parameter, System area *Battery back-up memory : 8MB
	Data memory	2MB		
	Reserved memory	7MB		
Flash memory		16MB		
Data memory	Direct variable	256k Byte		
	Auto allocated variable	512k Byte		
	Timer	No limitation, Range: 0.001sec ~ 4,259,967.295sec (1,193hours)		
	Counter	No limitation, Range: -32,768 ~ +32,767		
	System	4k Byte		
	Flag	64k Byte	L, N area	
File register	Communication	64k Byte (32 base, 16 slot, 32 channel)		U area: Analog device area
	Special	2k Byte (32 base, 16 slot, 32 channel)		Rarea: read/write (Command, XG5000)
Program	Number of program blocks	256		
	Initial task	1 (_INT)		
	Cycle task	32		
	Internal device task	32		
Operation mode		RUN, STOP, DEBUG		
Restart mode		Warm, Cold		
Self diagnostic functions		Watchdog timer, Memory error, I/O error, Battery error, Power Supply error		
Program download		RS-232C (1CH), USB (1CH)		
Data retain		Auto allocated variable: set by variable definition Direct variable: set by parameter		
Max. expansion base		31 stages		


Specification

Item	Hardware		Remark
CPU module	2 slot / Fiber, Twisted fair		
Expansion drive module	1 slot / Fiber, Twisted fair, Hybrid		
Base	Main base: 6 slot, Expansion base: 12 slot		
Power	AC110V	5V-5.5A	
	AC220V	5V-5.5A	
	AC110V	5V-8.5A	
	AC220V	5V-8.5A	
Expansion method and Max. expansion base	31 stages by network		
Base number setting	Rotary switch of expansion drive module		
Distance between expansion bases	Twisted fair: 100m (3km), Fiber: 2km (60km)		
Master/Standby switching over time	50ms or less		


Available modules for each base

Base		Available modules
1	Main base	CPU, Ethernet module (XGL-EFMx), RAPIEnet module (XGL-EIMx) * x: T (Twisted fair), F (Fiber optic), H (Hybrid)
2	Expansion base	I/O modules for XGI (Ethernet based communication module should be installed on Main base) Number of communication module: 12 for High-speed link, 8 for P2P Number of analog module: Analog input (139), Analog output (250)


Water power generation or Dam door control

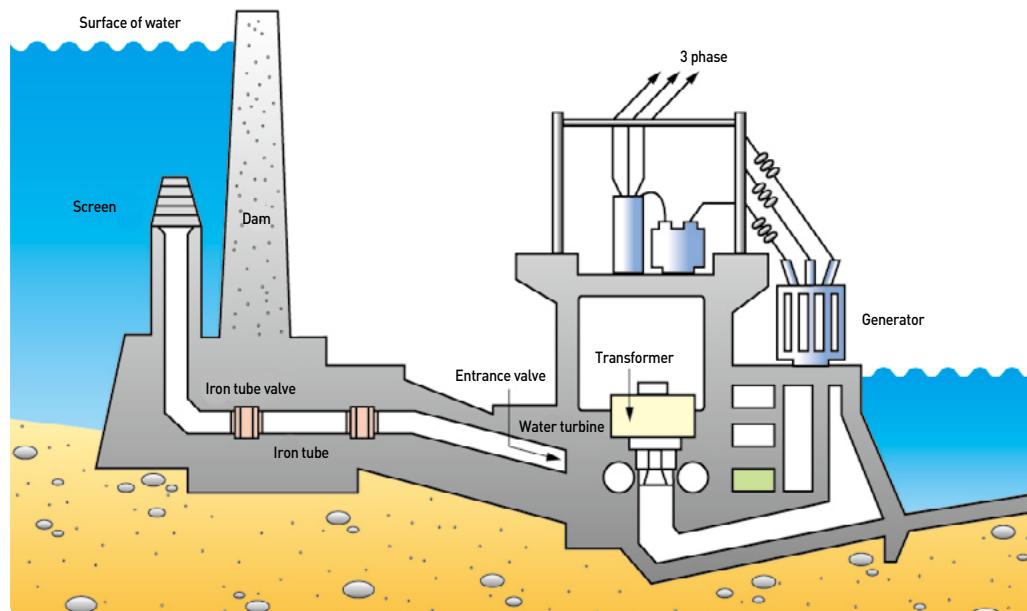


System configuration

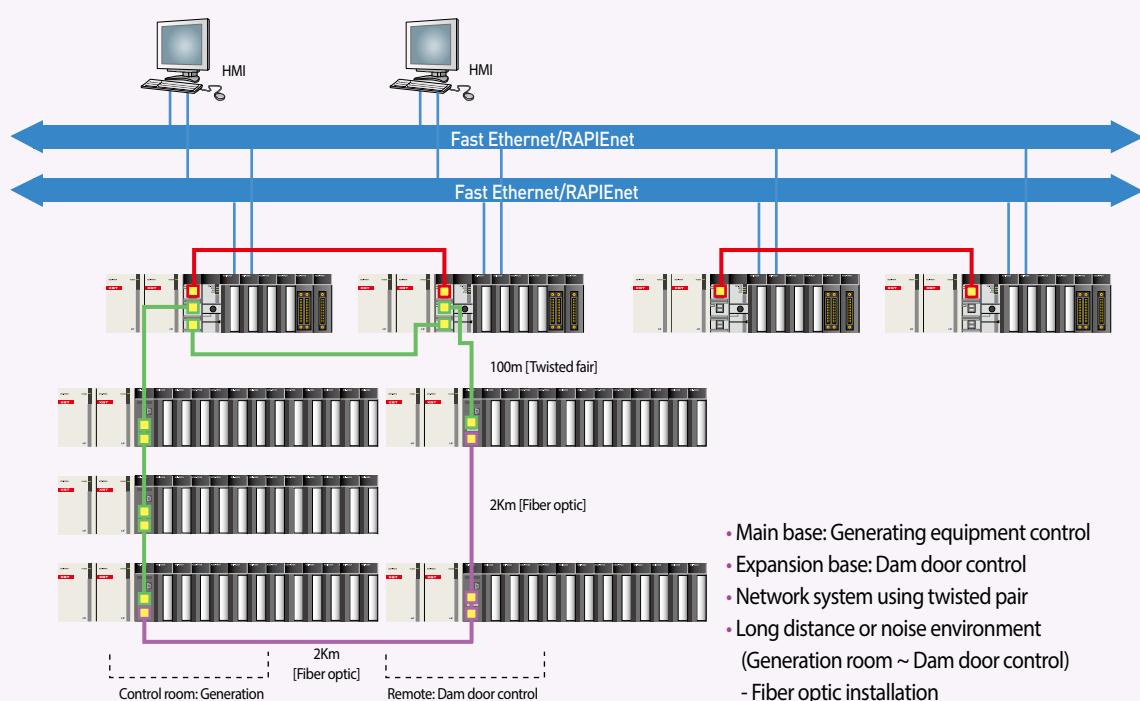


Generating boiler control

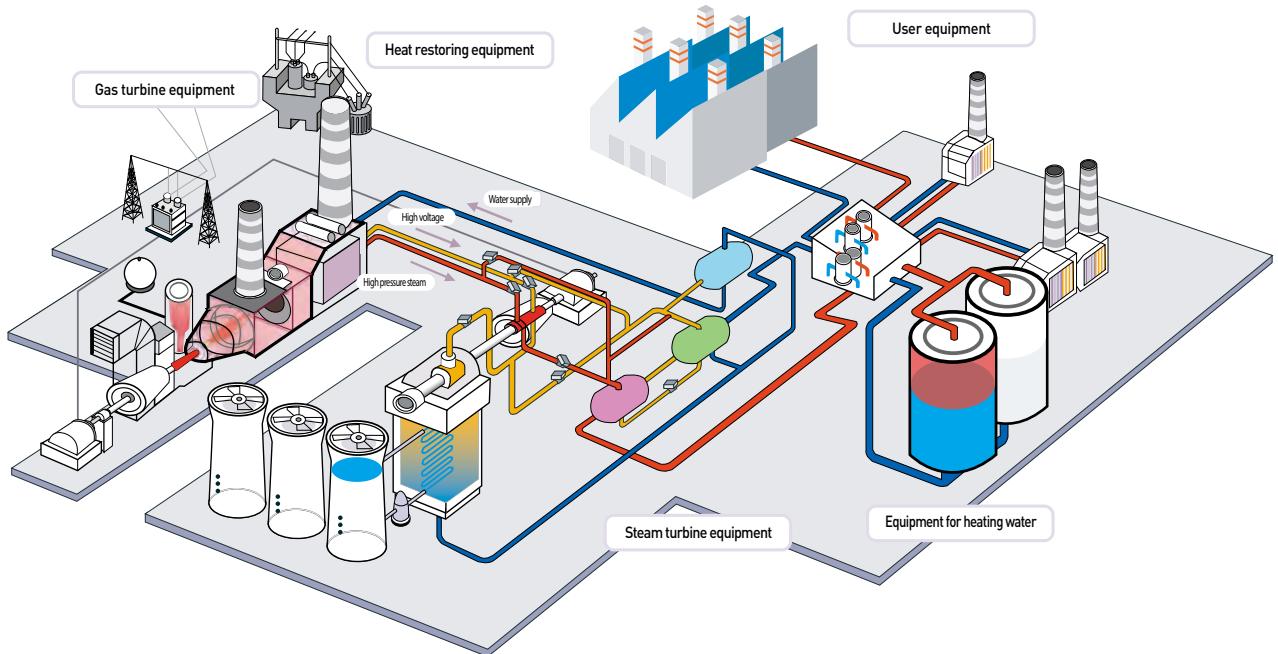


System configuration

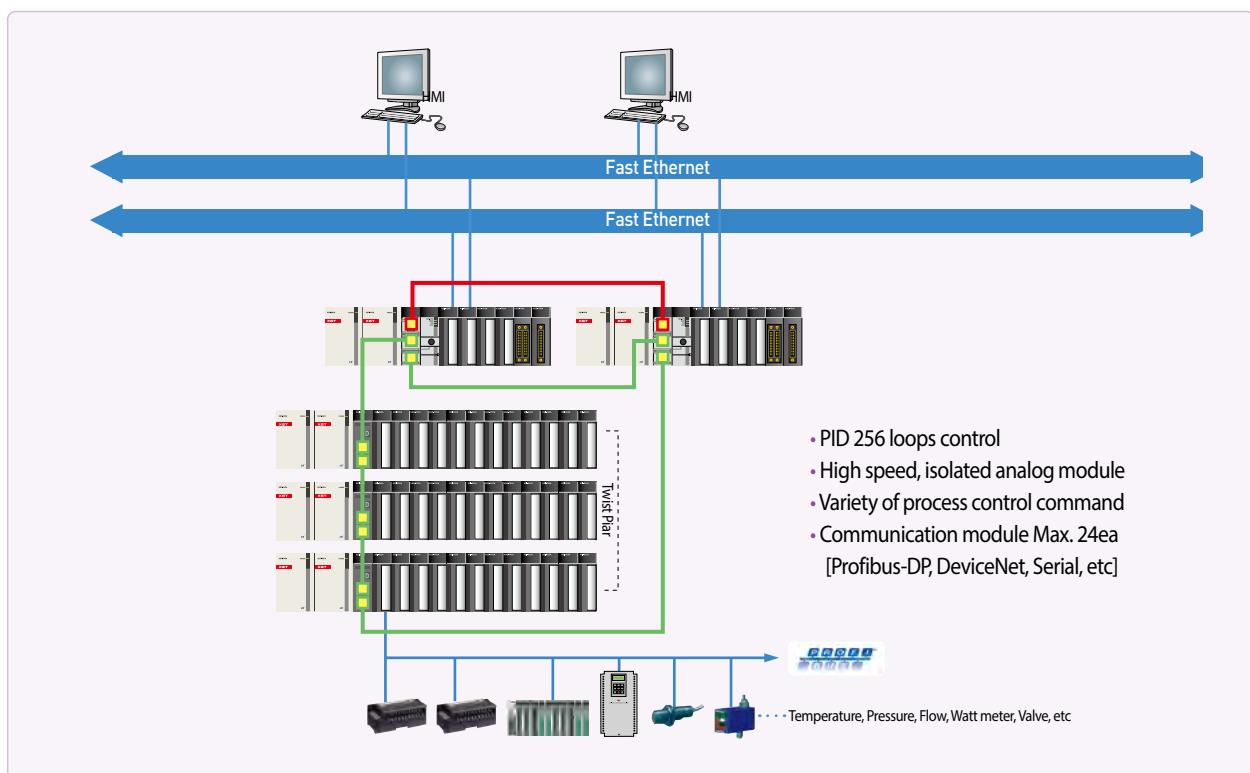


Stage control

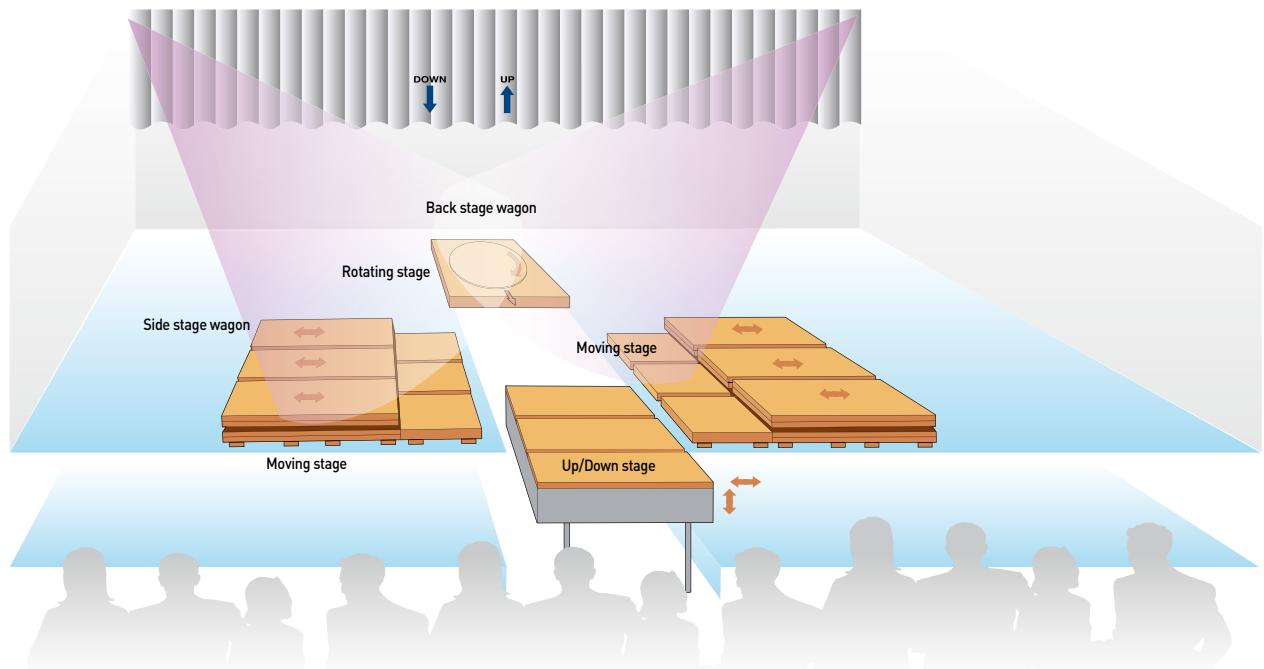


System configuration

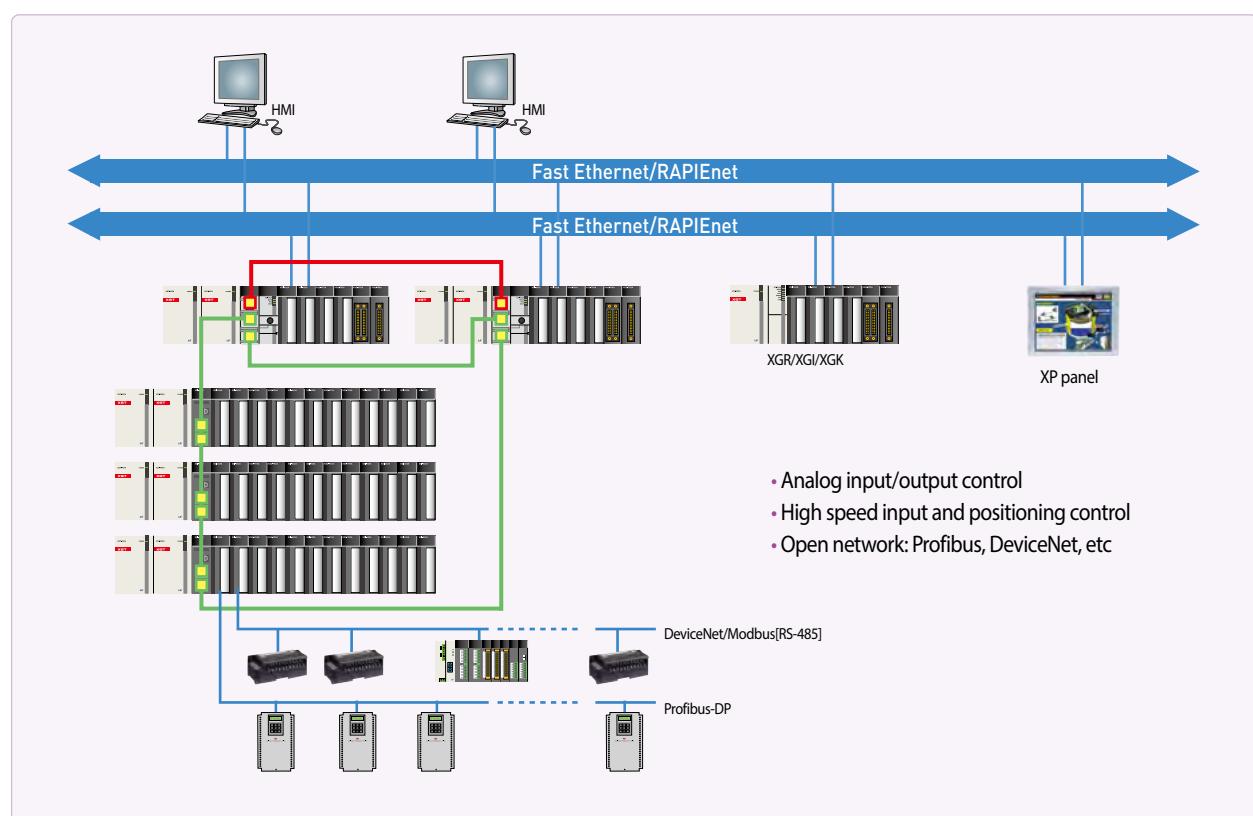


Water processing control

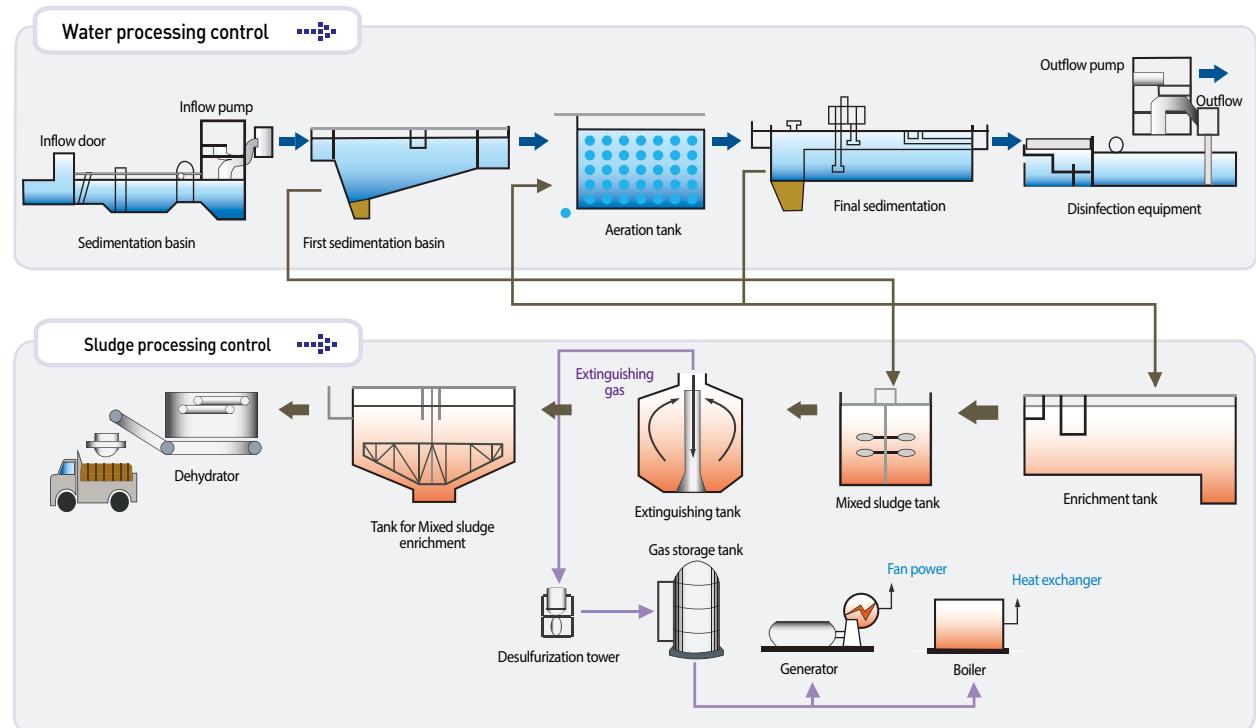


System configuration

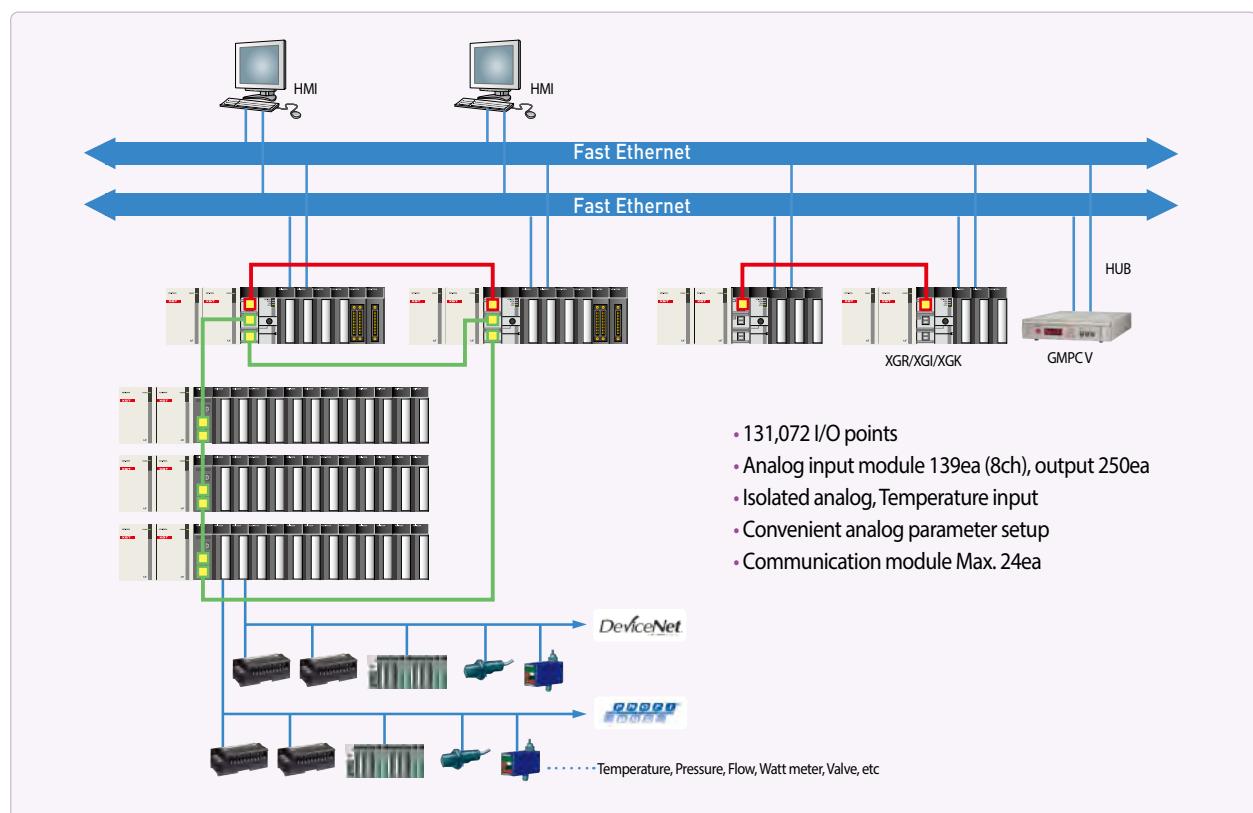


Incinerator control

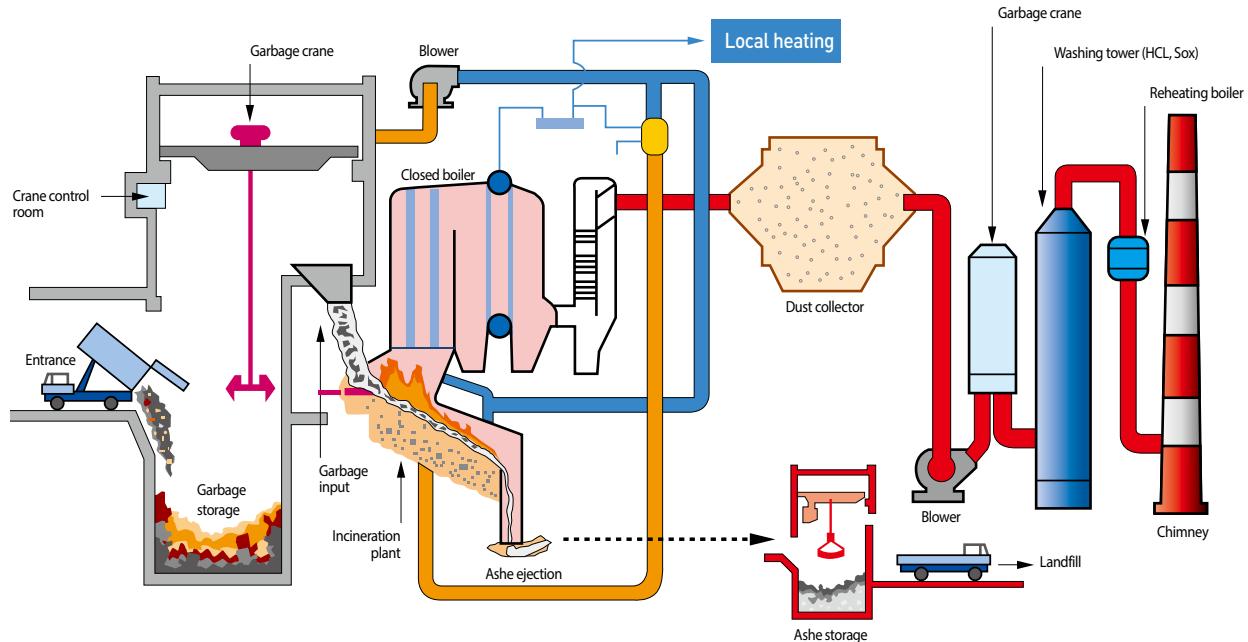


System configuration

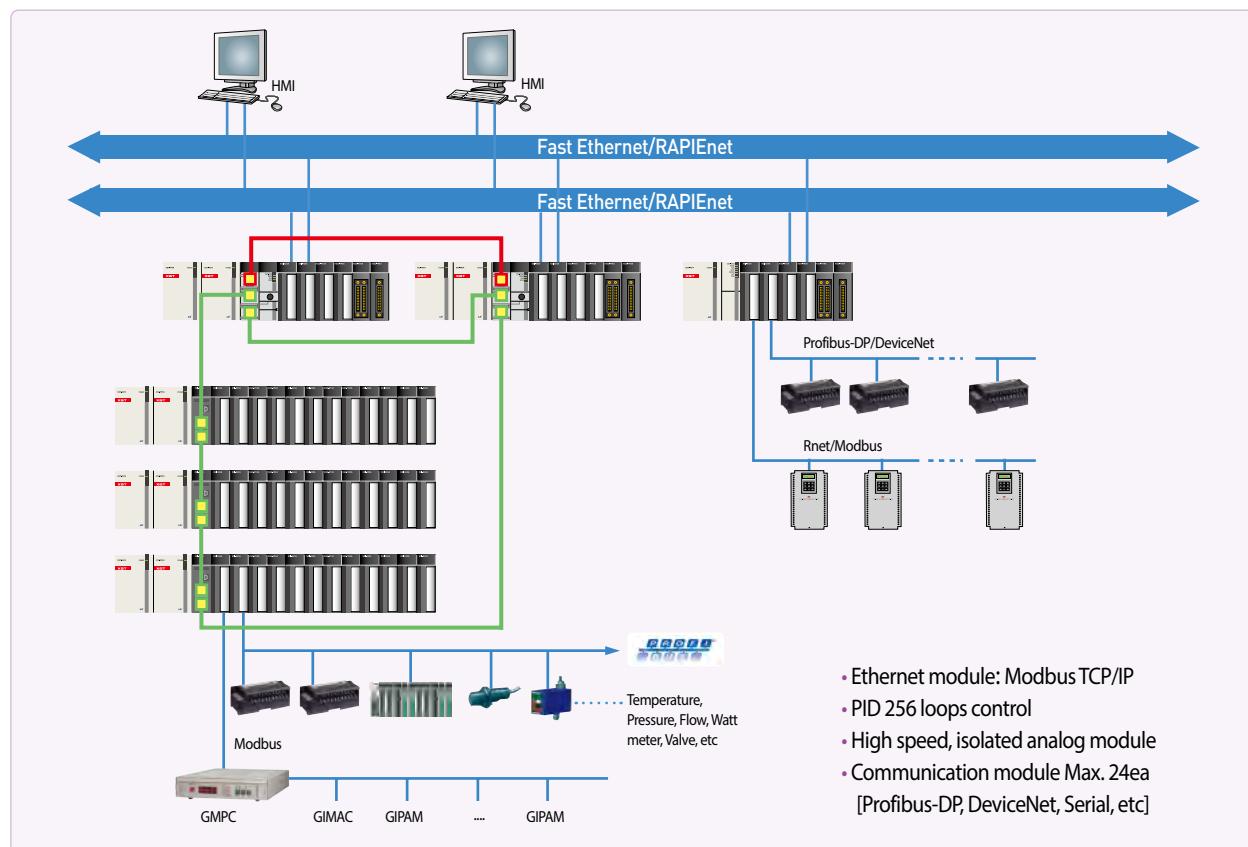


Broad casting system

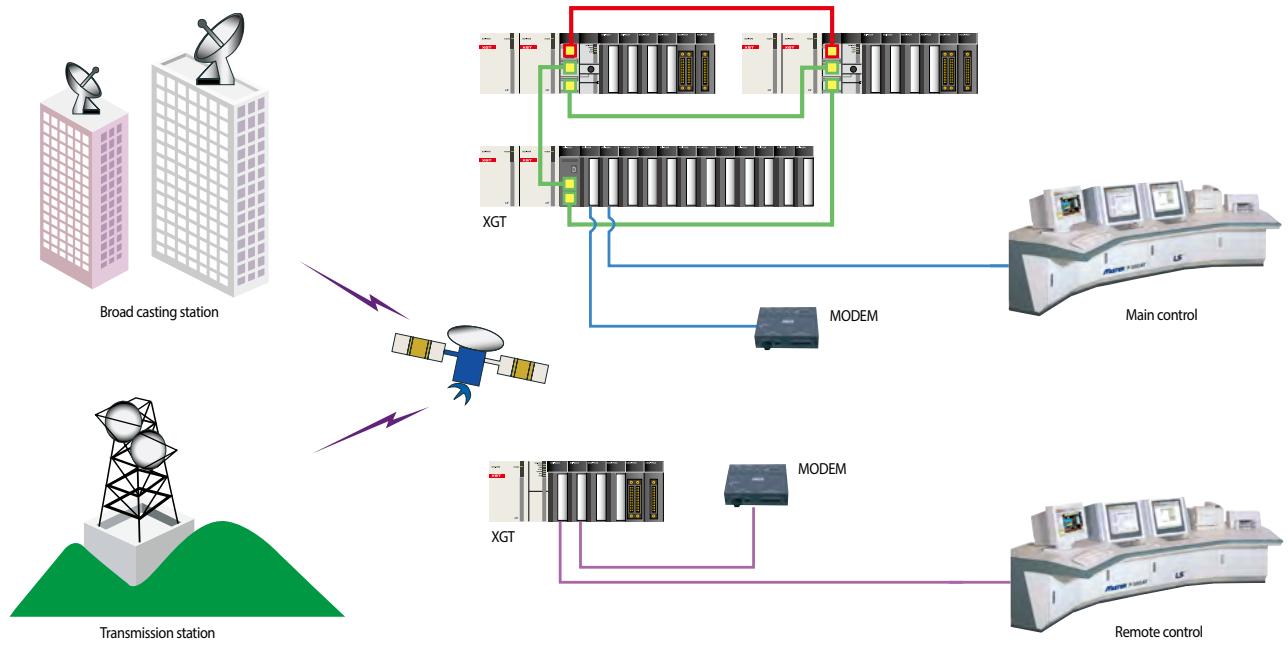

System configuration

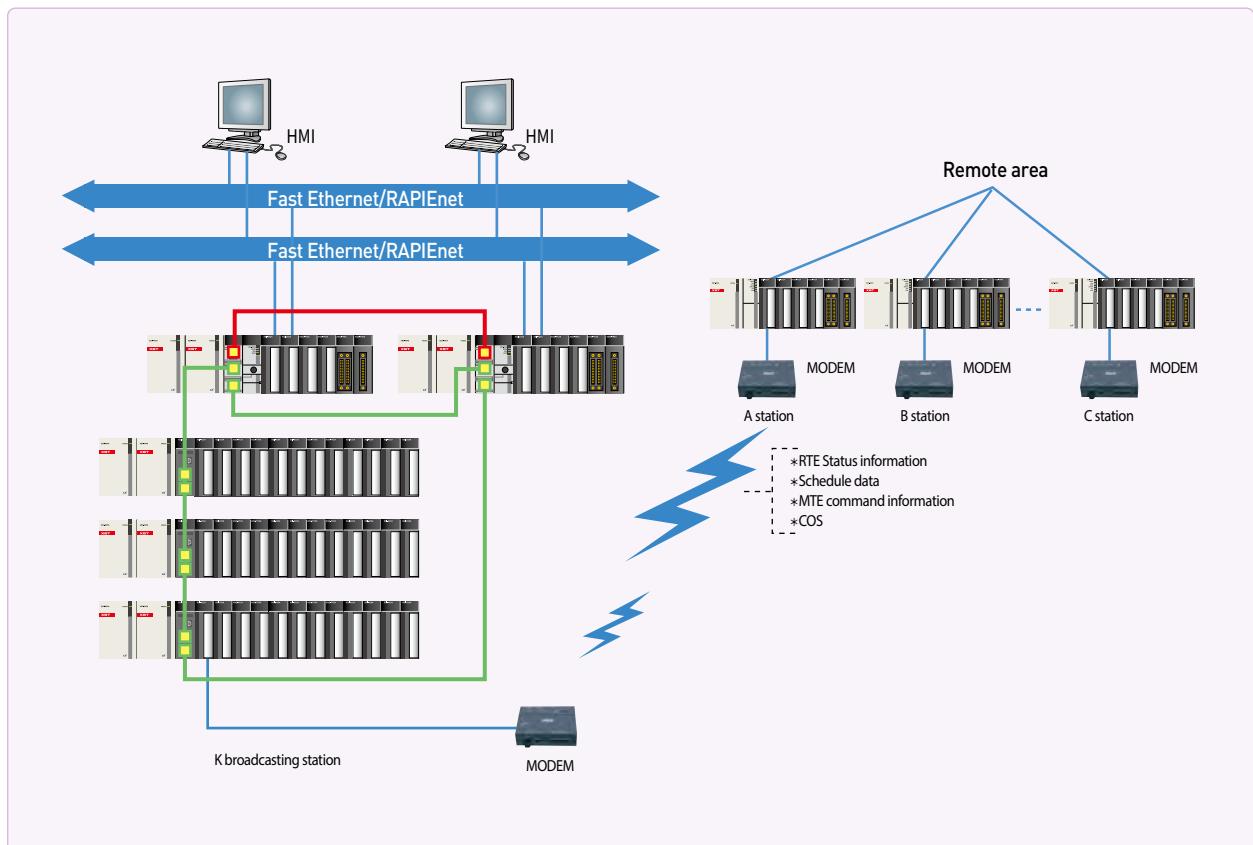

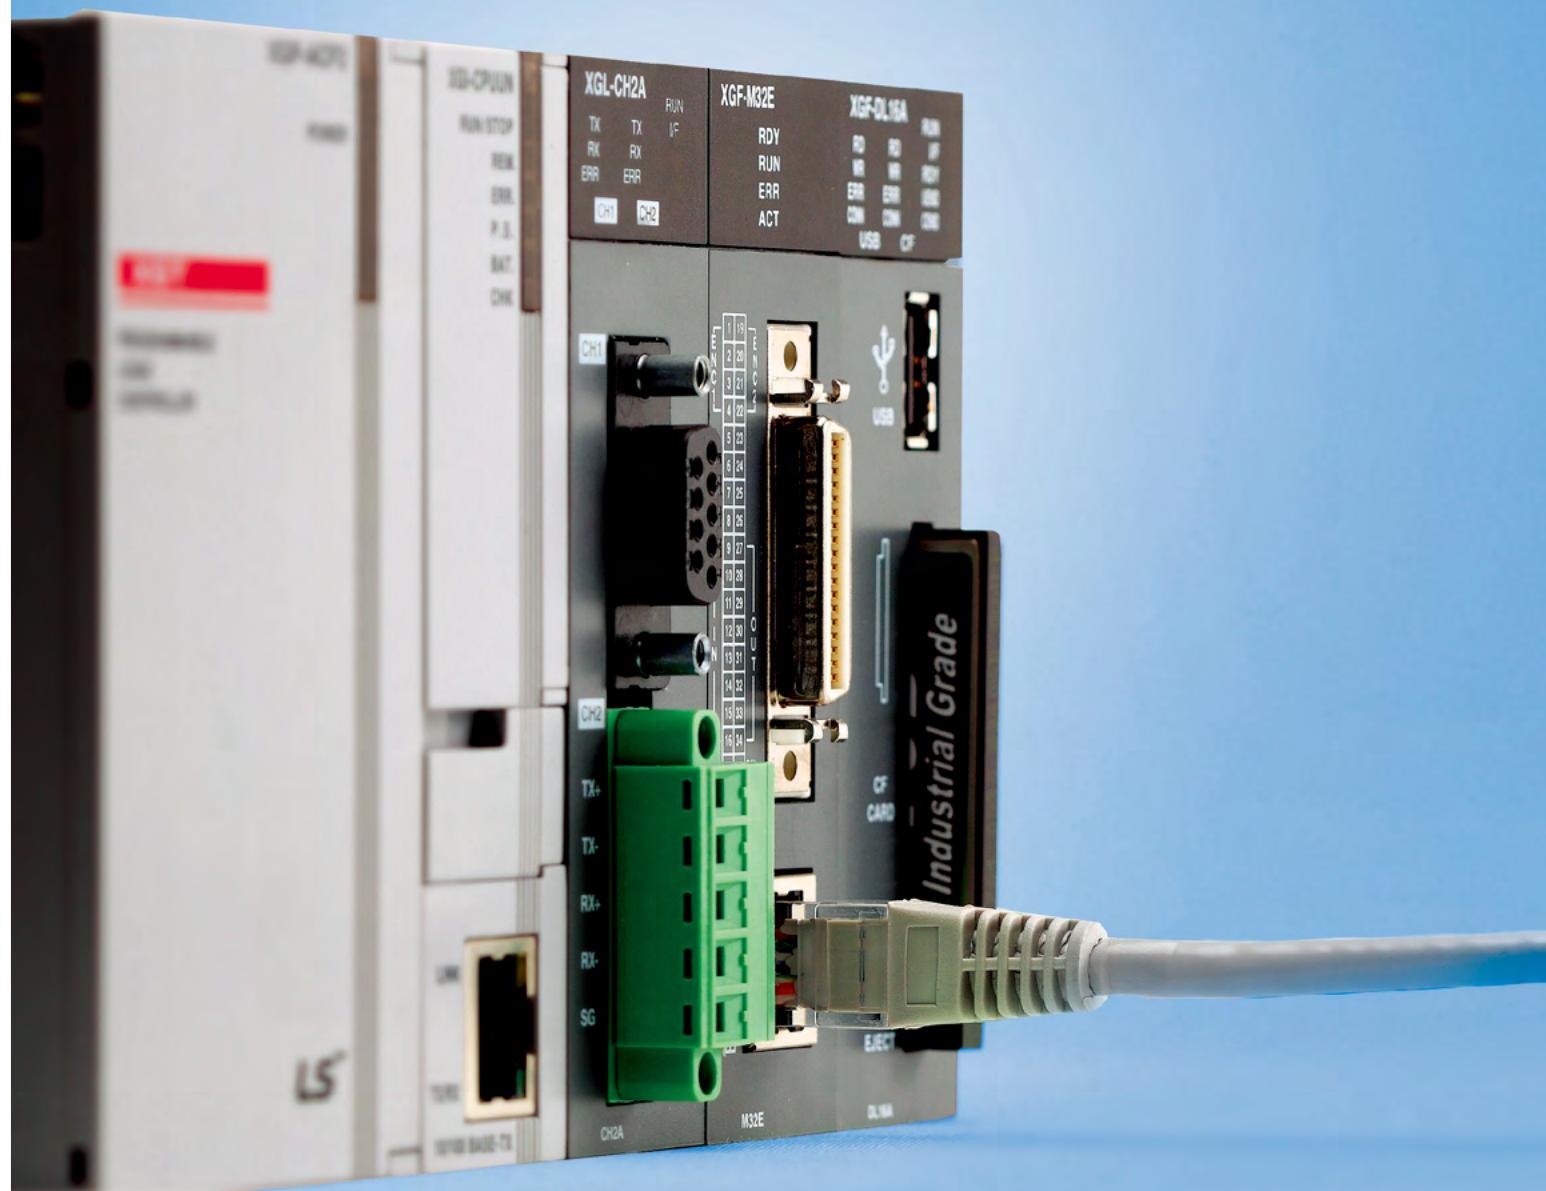




Network

Along with Ethernet, Profibus-DP, and DeviceNet, XGT series provide the maximum in control integration and communication flexibility.

Contents

46 XGT Network system	74 Rnet
48 RAPIEnet ⁺	76 Fnet
50 RAPIEnet ⁺ System Configuration	78 BACnet/IP
52 RAPIEnet ⁺ Master(Client) module	80 Computer-Link
54 RAPIEnet ⁺ Expansion driver module	82 Communication example (Ethernet)
56 RAPIEnet ⁺ Smart I/O (Stand alone type)	84 Communication example (Rnet)
58 RAPIEnet ⁺ Smart I/O (Expandable type)	86 Communication example (DeviceNet) [SyCon setting Profibus, DeviceNet]
60 RAPIEnet ⁺ Multiport RAPIEnet switch(MRS)	87 SMART I/O [Stand alone]
62 RAPIEnet ⁺ CP Card	88 SMART I/O [Modbus/TCP, Ether Net/IP Adapter]
64 OPC UA Server	90 SMART I/O [DeviceNet adapter]
66 Computer-Link [Cnet]	91 SMART I/O [Profibus-DP adapter]
68 DeviceNet [Dnet]	92 SMART I/O [Rnet adapter]
70 Profibus-DP [Pnet] system	93 SMART I/O [Features]
72 Profibus-DP[Pnet] Slave I/F system	
73 Profibus-DP [Pnet] Remote I/F system	

Features

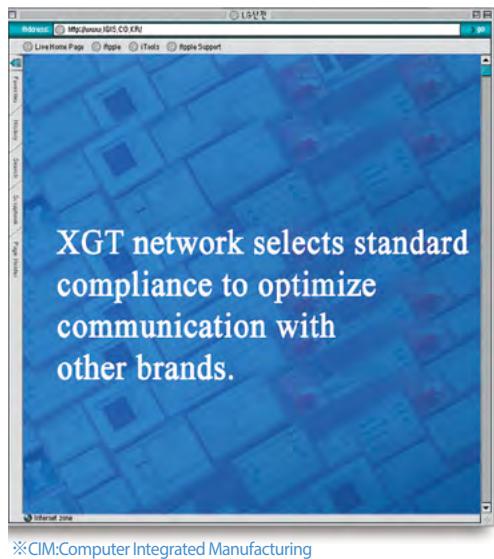**About RAPIEnet⁺**

Real-time, hybrid & ring topology-based industrial Ethernet solution, integrating Modbus TCP/IP, EtherNet/IP and RAPIEnet for IoT, future-oriented technology for high performance & efficiency.

RAPIEnet

- IEC standard (RAPIEnet) communication technology applied
- Dedicated network for LS PLC
- Communication speed: 100Mbps, 1Gbps
- Topology : Star, Line, Ring
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte
- Max No. of connected stations per network : 64 stations

EtherNet/IP


- Topology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte(Non-periodic tag)
- Max No. of connected stations per network : 64 stations

Modbus TCP/IP

- Eopology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 125/123 Word
- Max No. of connected stations per network : 64 stations

XGT dedicated

- Topology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte
- Max No. of connected stations per network : 64 stations

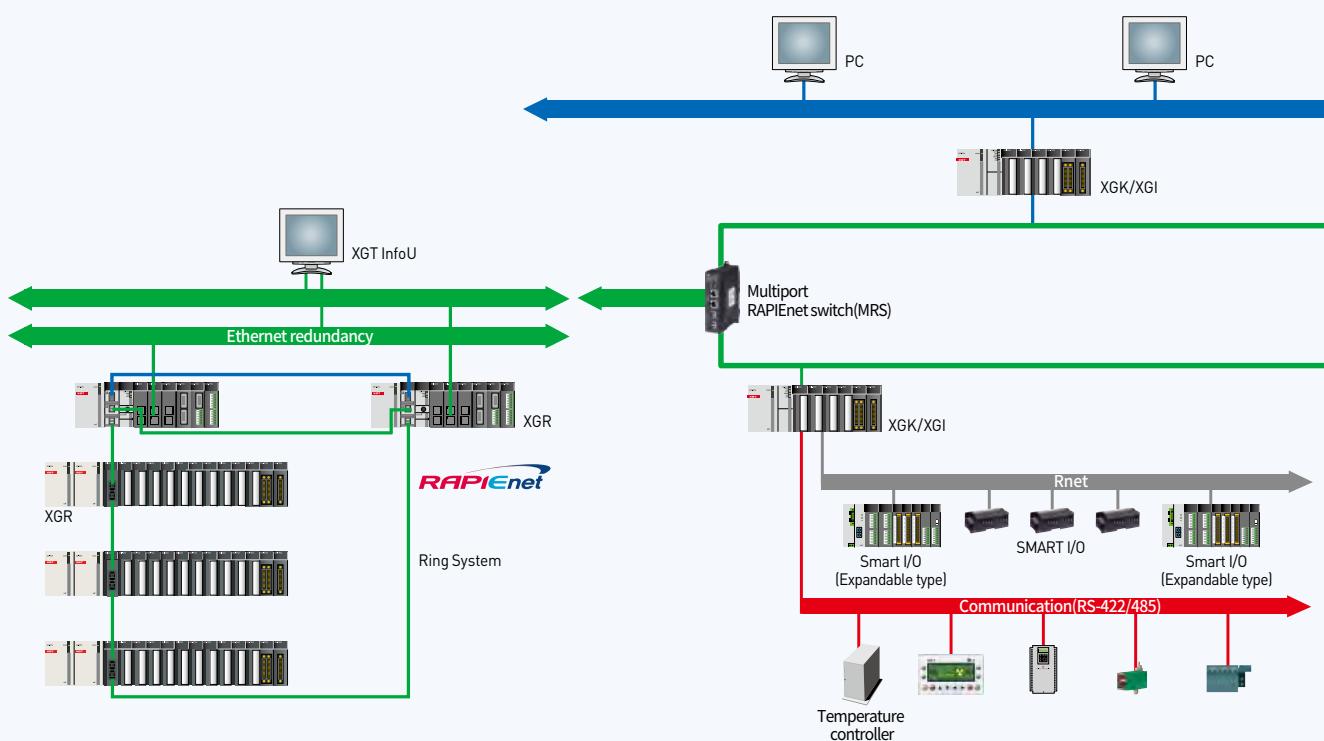

Computer Link(Cnet)

- RS-232C/485/422 communication
- Long-distance communication via modem connection
- Various connection to HMI S/W (XGT, Modbus RTU, Modbus ASCII)
- User-defined communication
- Convenient P2P master (XGT, Modbus)

Fnet

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan

Rnet

- High-speed communication 1Mbps
- Long communication distance Max.750m
- Max. 6 repeaters (up to 5.25km)
- Network management using Auto-scan (Slave module information)

DeviceNet(Dnet)


- Connectable to other PLCs and control device
- Compliance of the ODVA standard
- Flexible communication speed setting: 125/250/500Kbps
- Multi-drop and T branch connection
- Long communication distance: Max. 500m


Profibus-DP(Pnet)

- Optimum communication for a master automation device and distributed slave I/O devices
- Fast slave communication omitting application layer
- Long communication distance: Max. 1200m
- Communication using High-speed link parameter

Installation number of network module available

Item	XGK / XGI / XGR CPU
Total network module	24
High-speed link module	12
P2P service	8

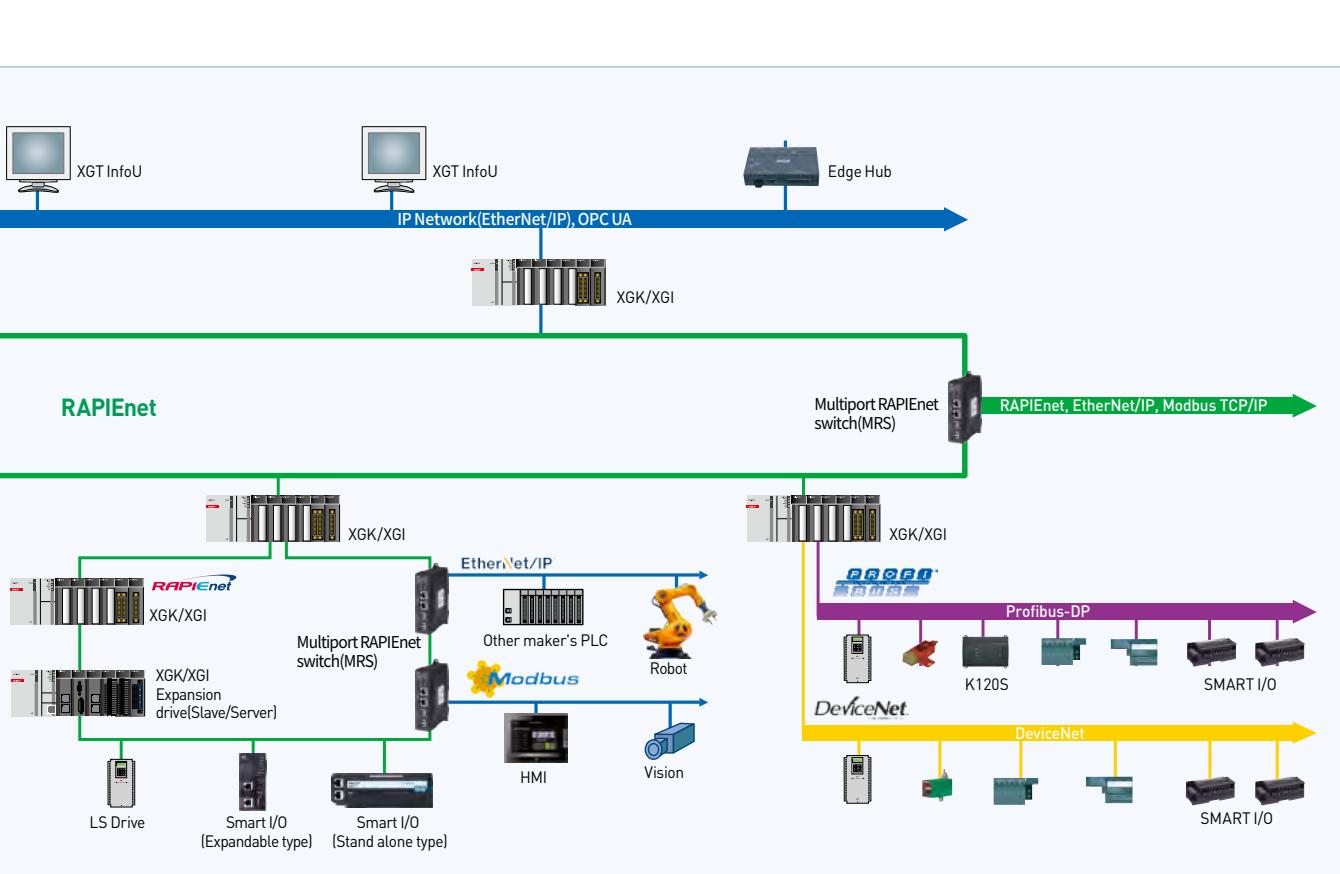

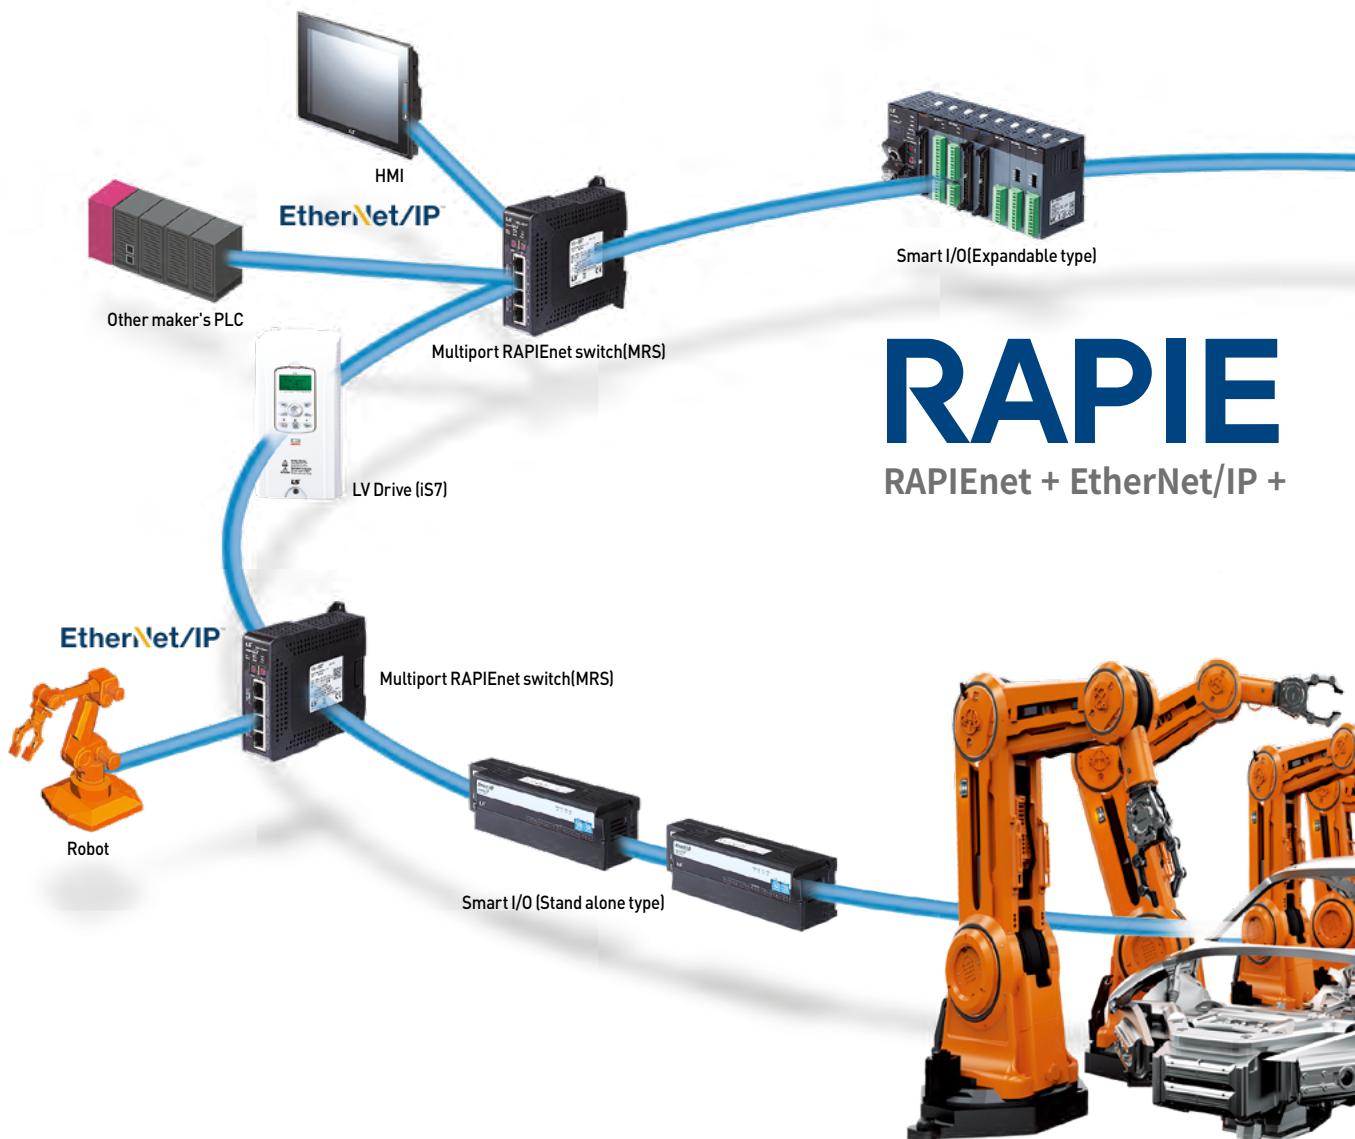


About RAPIEnet⁺

Real-time, hybrid & ring topology-based industrial Ethernet solution, integrating Modbus TCP/IP, EtherNet/IP and RAPIEnet for IoT and future-oriented technology for high performance & efficiency.



Professional

- Integrated hybrid network solution
- Three protocols in a single product: Modbus TCP/IP, EtherNet/IP, RAPIEnet
- Various and convenient network system configuration with smart extension service
- IEC standard (RAPIEnet) communication technology applied
- Gigabit Ethernet from 100Mbps to 1Gbps for large networks

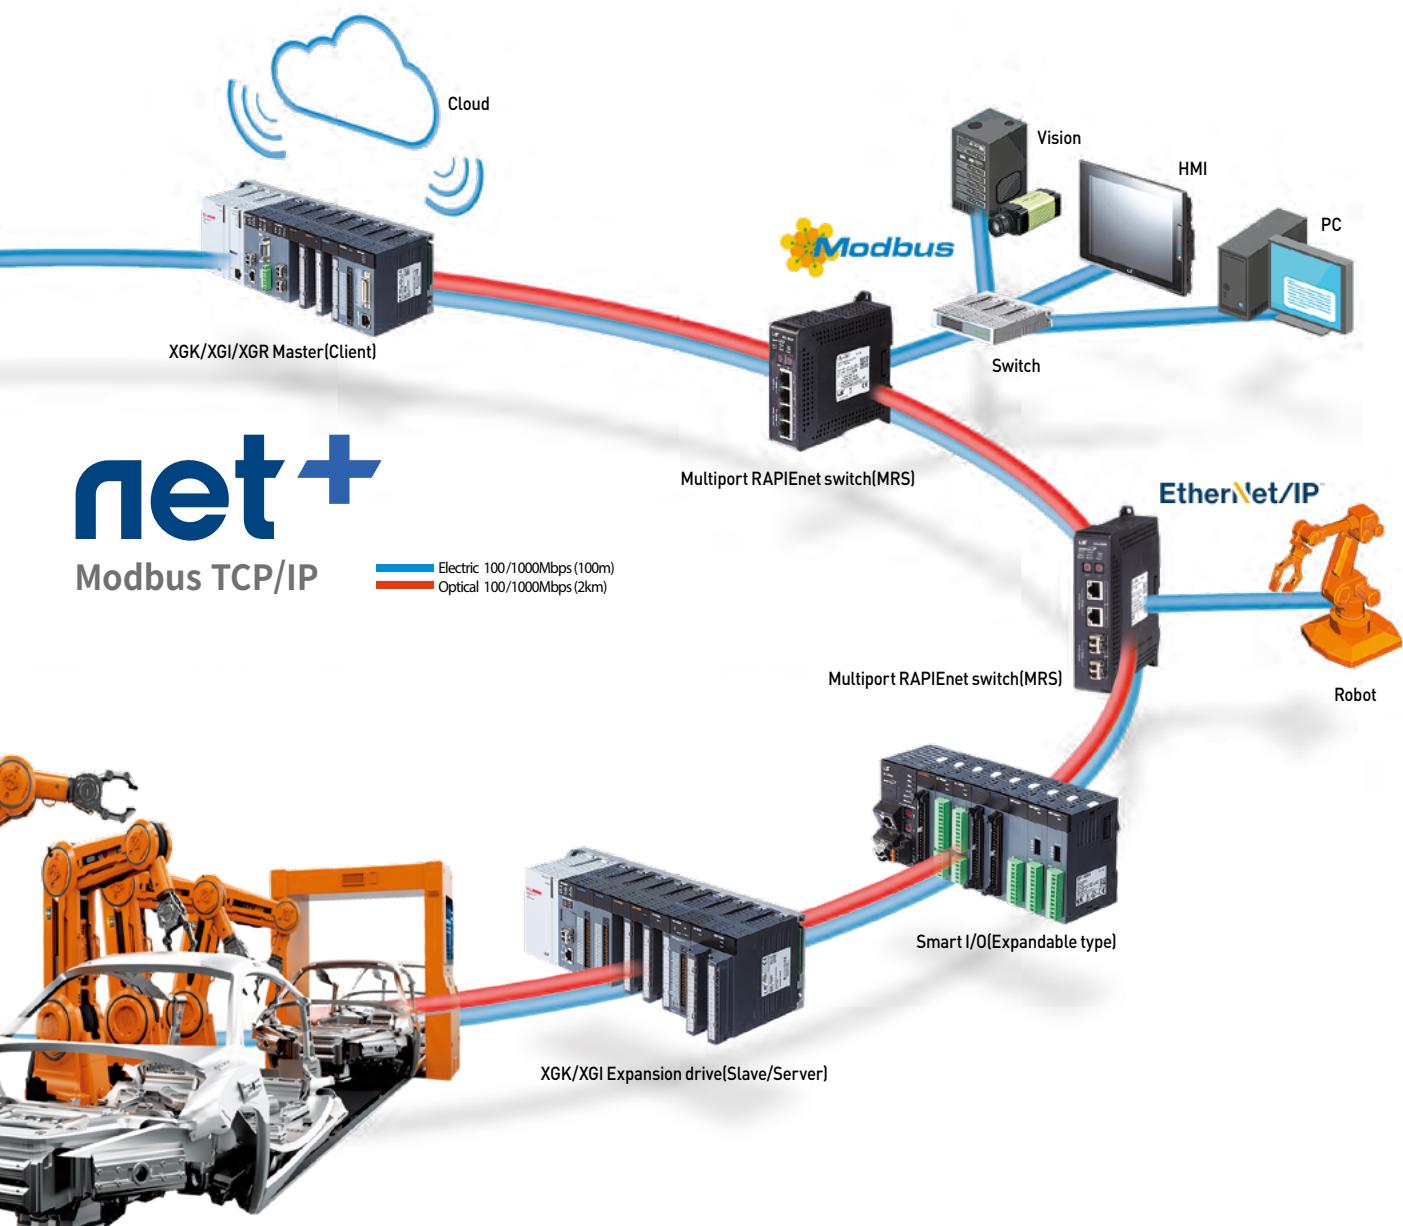

Efficiency

- Efficient network configuration with 2-port Ethernet
- Network cost reduction using electrical to fiber optic cable
- Optimized system configuration with automation products (PLC, remote I/O, Drive, etc.)
- Easy engineering via intuitive and user-friendly programming tool (XG5000)



Convenience

- Autoscan for network registration
- Min. parameter and programming setup
- Simple editing (add/change) for modules of operating system
- Variable maintenance available: service status, diagnosis, comm. history, etc.




Reliability

- Reliability improvement for ring topology network
- Various functions for network monitoring and diagnosis
- Noise reduction by fiber-optic network

Ring Type

- Ring topology and configuration with third-party devices: reliability & product/wiring reduction
- Hybrid network (electric/fiber-optic): system cost reduction


Electric 100/1000Mbps (100m)
 Optical 100/1000Mbps (2km)

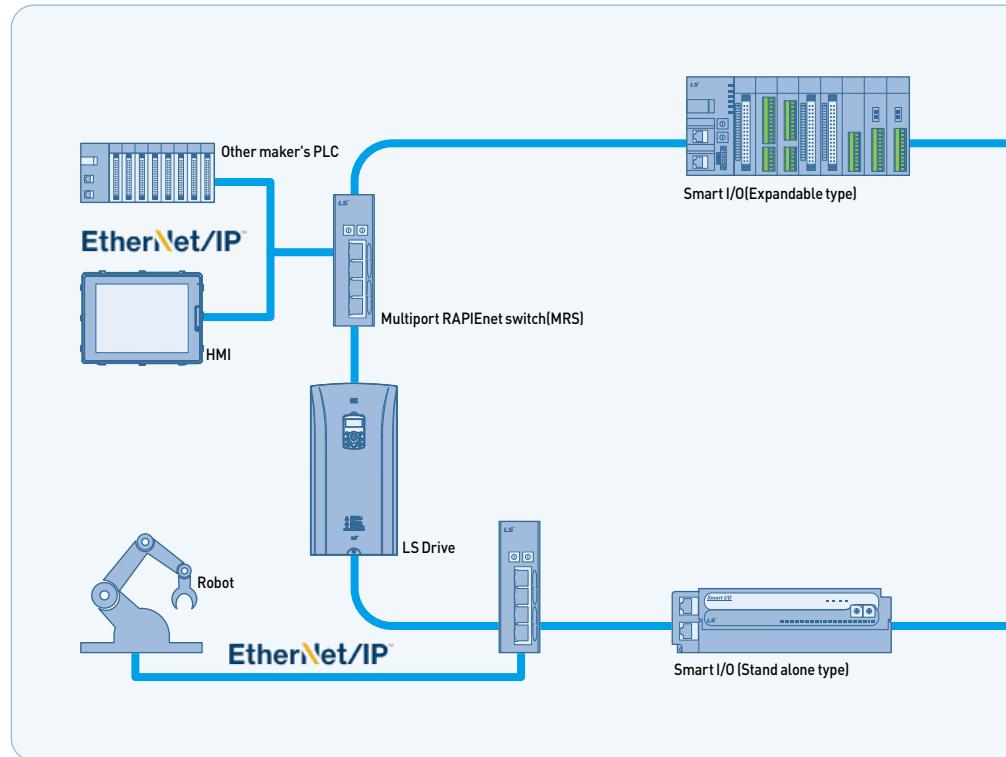

Daisy-chain Type

- Integrated network configuration with third-party devices
- EtherNet/IP and Modbus Hybrid communication: product/wiring reduction


Electric 100/1000Mbps (100m)
 Optical 100/1000Mbps (2km)

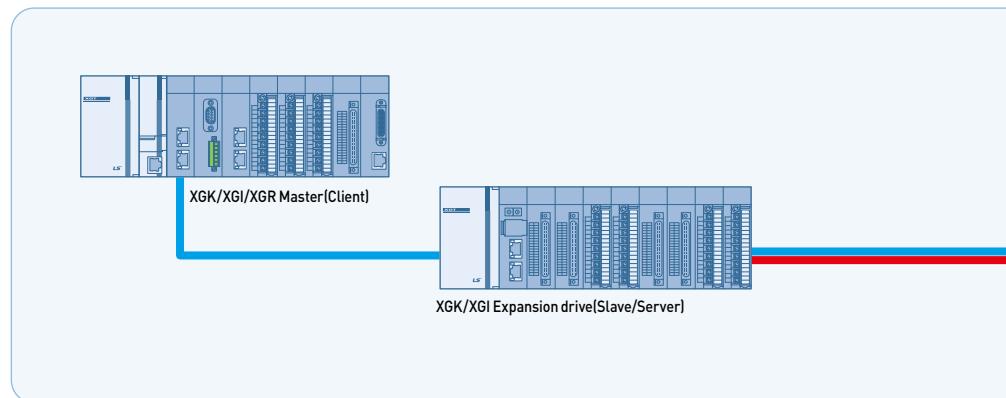




Star Type

- Integrated network configuration with third-party devices
- Various network configuration (general switch application available)

Electric 100/1000Mbps (100m)

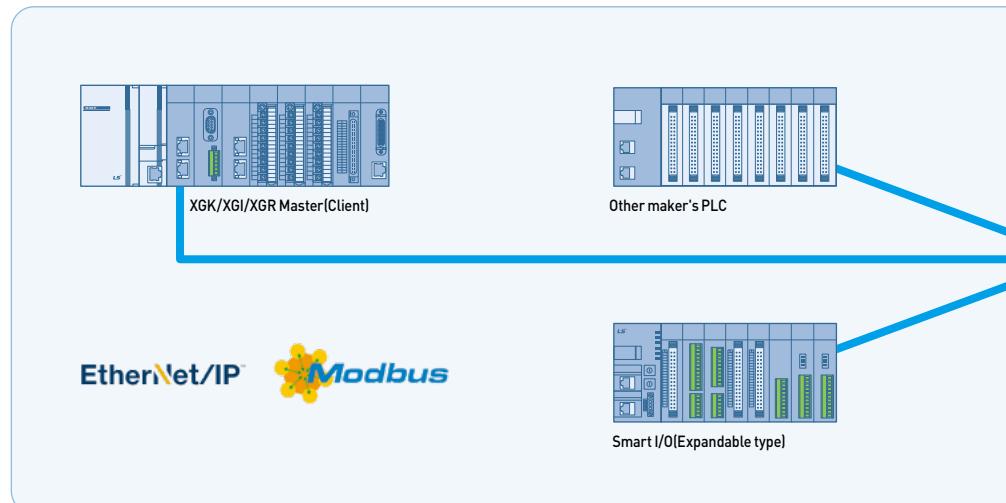

RAPIEnet+

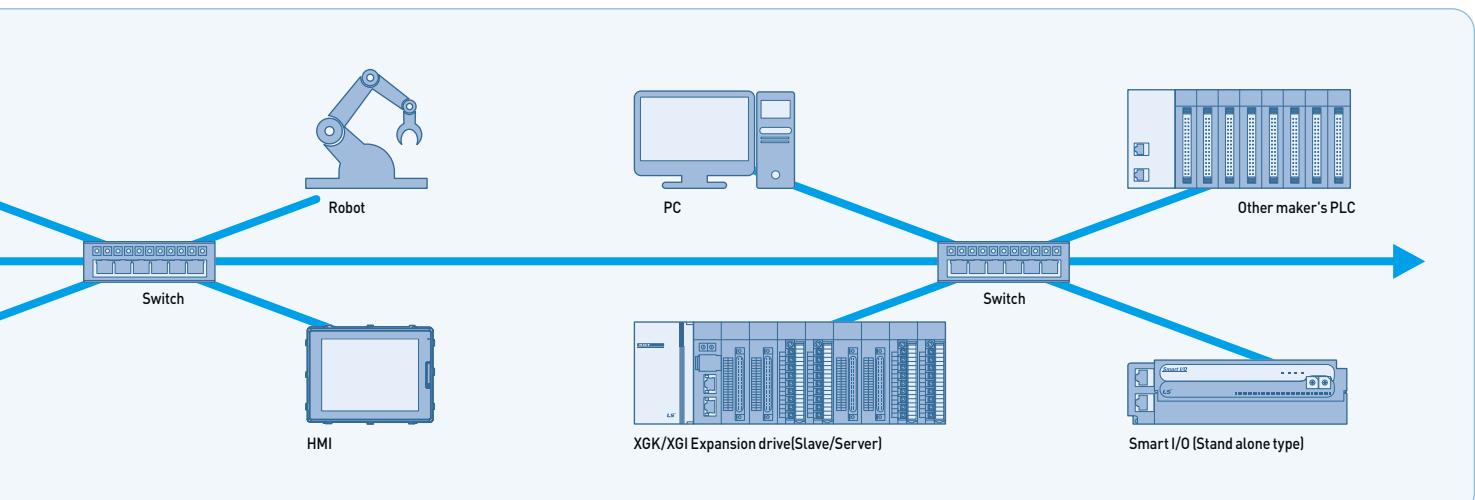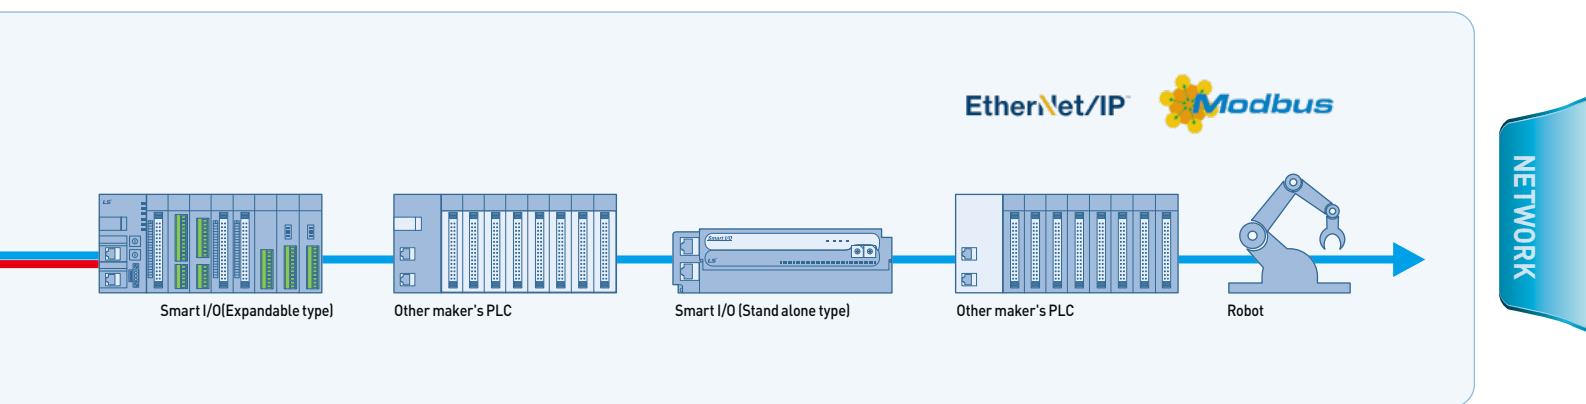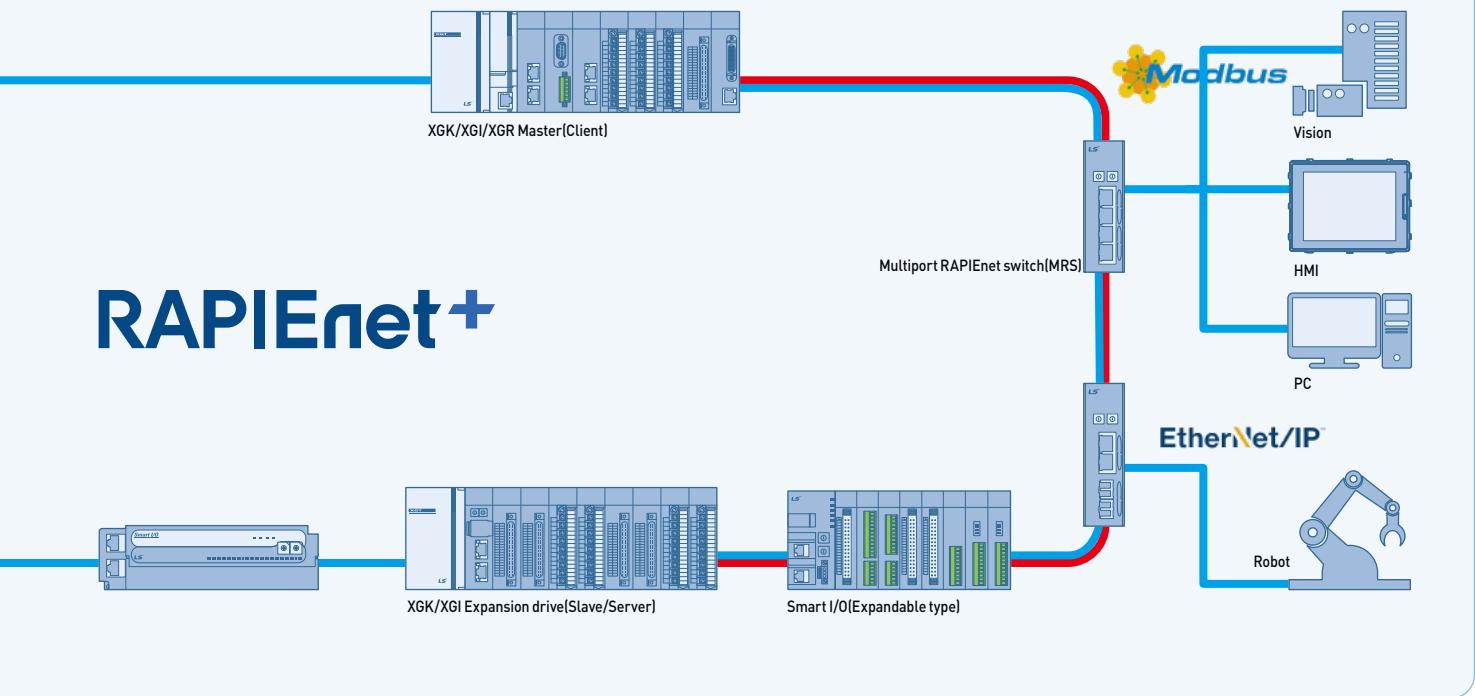

XGL-EFMTB, XGL-EFMFB, XGL-EFMHB

- Gigabit Ethernet (1Gbps)
- Two-port support
- Ring/Line topology configuration support:
no additional switch required
- Modbus TCP/IP, RAPIEnet (v6.0 or higher), EtherNet/IP (v6.0 or higher) protocol support
- Max 5.000pps network load (based on server operation)
- Data processing speed: 1ms
- Various and convenient network system configuraion with Smart Extension Service (v8.0 or higher)
- XG5000 network setup and programming (v4.30 or higher)
- User protocol editing and P2P service:
(network with third-party devices)
- Various diagnostic functions and module/
network status information
- Network module check function (Ping test)
- Network service information (HS link, P2P, media status, etc)
- OPC UA Server support (OPC UA Specification v1.03, XGL-EFMxB v7.0)
 - OS replacement for OPC UA Server of XGL-EFMxB in XG5000 is required.
(Please refer to user's manual).



Specification

	Item		XGL-EFMTB	XGL-EFMFB	XGL-EFMHB		
Transm ission Specifi cations	Transmission speed (Mbps)		10/100/1000	100/1000	Electric: 10/100/1000 Optical: 100/1000		
	Transmission method		Baseband				
	Maximum distance between nodes		100m (Node-Switch)	2km (Multi-mode)	Electric: 100m Optical: 2km		
	Send media		Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable				
	Maximum protocol size		1,500 Byte				
	Communication network access method		CSMA/CD				
	Frame error check method		CRC32				
Max. load			Ethernet: 10,000pps, RAPIEnet: 40,000pps				
Topology			Line, Tree, Star, Ring (RAPIEnet Enable)				
Diagnosis function			Station number / IP collision detection function, Diagnosis using XG5000				
Station number / IP setting method			Rotary switch, XG5000, BOOTP/DHCP				
Station number / IP setting range			Station number setting value set by the tool(XG5000) (0 to 220) - IP: 192.168.1.xx(xx:100 + rotary switch 1~99)				
External connecting terminal			RJ45, SFP : PADT connection, data communication				
Basic Specific	Current consumption (mA)	100Mbps	560	750	670		
		1Gbps	900	740	670		
	Weight(g)		146	130	120		

Network service specification

	Item	XGL-EFMTB	XGL-EFMFB	XGL-EFMHB
RAPIDnet	Data processing unit		Byte(8bit)	
	Max read/write data size		1,400 byte	
	Max No. of connected stations per network		221 stations (However, 64 stations are used for the Smart extension service.)	
EtherNet/IP	Data processing unit		Byte(8bit)	
	Max read/write data size		Non-periodic tag: 1,400 Byte Non-periodic object : 1,024 Byte Cycle 1,024 Byte	
	Available communication type		Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object	
Modbus / TCP	Maximum number of connections		Connection-type (periodic)+ Non connection type(Non-periodic):64	
	Data processing unit		Word(16bit),bit	
	Max read data size		125 Word(2,000 Bits)	
	Max write data size		123 Word(1,968 Bits)	
XGT dedicated	Maximum number of connections		64	
	Data processing unit		Byte(8bit)	
	Max read/write data size		1,400 byte	
	Maximum number of connections		64	

Smart extension master

Smart extension service is network service between LS Automation products to enable users to extend several PLCs and drives without network parameter and programming, including EtherNet/IP client service.

Smart Extension Setup Wizard	Users could do network setup easily with 'Smart Extension Setup Wizard' in XG5000.
Smart Extension Autoscans	Autoscans execution of network & control setting during online.
Remote Device Setting	* Automatic execution of I/O and Basic Parameter Setting via XGL-EFMxB (master) * Hot swap setting for slave module replacement
Smart Extension Diagnosis Flag	Diagnostic information service for network devices and modules of Smart Extension system
Remote network	Device IP/Station No. change Remote network device IP and station no. change during online based on user setting (master)

XGL-DBDT, XGL-DBDF, XGL-DBDH

- Large PLC system configuration with XGL-DBDx(slave module) installation on CPU slot of XGK/XGK main base
 - PLC extension system configuration: 63-stage network extension (XGT base extension: 7 stage)
 - Extension distance: electric 100m, fiber-optic 2km (XGT base extension: 15m)
 - I/O point: Max. 49,152 (XGT base extension: 6,144)
- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol simultaneous support
- Electric/Fiber-optic/Hybrid module comm. speed: Max. 1Gbps
- 2-port (dual port) support
 - No additional switch required for ring/line topology configuration
- Hot swap for base replacement (add/delete available)
 - Base replacement without system in case of extension base error
- Ring-to-line: fast reconfiguration to line topology for a line fault of ring
- Extension base power redundancy (with XGR extension base)
- Diagnostic function for service status



Specification

	Item	XGL-DBDT	XGL-DBDF	XGL-DBDH
Transmission Specifications	Transmission speed (Mbps)	100/1000	100/1000	Electric: 100/1000 Optical: 100/1000
	Transmission method	Base band		
	Maximum distance between nodes	100m@CAT5E or higher	2km@100Mbps.MM	Electric: 100m Optical: 2km
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable		
	Maximum protocol size	1,500Bytes		
	Communication network access method	CSMA/CD		
	Frame error check method	CRC32		
Max. load		Ethernet: 10,000pps, RAPIEnet: 40,000pps		
Topology		When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)		
Diagnosis function		Station number/IP collision detection function, self-diagnosis service, diagnosis using XG5000		
Station number / IP setting method		Rotary switch, XG5000, BOOTP/DHCP		
Station number / IP setting range		Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)		
External connecting terminal		USB mini B : PADT connection RJ45, SFP : PADT connection, data communication		
Status indication LED		PWR, RUN, SVR, I/F, RELAY, PADT, CHK, ERR, FAULT, LINK, ACT		
Parameter setting		XG5000(USB, Ethernet port)		
Device file		EDS file(Only EtherNet/IP)		
Maximum number of modules to be installed		12		

Network service specification

	Item	XGL-DBDT	XGL-DBDF	XGL-DBDH
RAPIEnet	Data processing unit	Byte(8bit)		
	Max read data size	1,400 Byte		
	Max write data size	1,400 Byte		
	Max No. of connected stations per network	64 station		
EtherNet/IP	Data processing unit	Byte(8bit)		
	Max read data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Max write data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object		
	Maximum number of connections	Connection-type (Cycle):10 Non connection type(Non-periodic) message(Tag, Object):10		
Modbus TCP/IP	Data processing unit	Word(16bit),bit		
	Max read data size	125 Word(2,000 Bits)		
	Max write data size	123 Word(1,968 Bits)		
	Maximum number of connections	64		

Available Module

	Item	I/O module		Item	I/O module
Digital	Input	XGI-D21A	Input	XGF-AD16A	
		XGI-D22A/B		XGF-AC4H	
		XGI-D24A/B		XGF-AW4S	
		XGI-D28A/B		XGF-DV4A	
		XGI-A12A		XGF-DV8A	
		XGI-A21A/C		XGF-DC4A	
		XGI-D21D		XGF-DC8A	
	Output	XGQ-RY1A	Output	XGF-DV4S	
		XGQ-RY2A/B		XGF-DC4S	
		XGQ-TR1C		XGF-DC4H	
		XGQ-TR2A/B		XGF-HO2A	
		XGQ-TR4A/B		XGF-HD2A	
		XGQ-TR8A/B		XGF-HO8A	
		XGQ-SS2A		XGF-RD4A	
	Input/Output	XGQ-RY1D		XGF-RD4S	
		XGH-DT4A		XGF-TC4S	
Analog	Input	XGF-AV8A	RTD & thermocouple	XGF-RD8A	
		XGF-AC8A		XGF-AH6A	
		XGF-AD4S		XGF-TC4UD	
		XGF-AD8A		XGF-TC4RT	
	Input/Output				
Temperature controller					

GEL-D24C, GEL-DT4C1, GEL-TR4C1, GEL-RY2C, GEL-AV8C, GEL-AC8C, GEL-DV4C, GEL-DC4C

- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol support
- RJ45 connector
- Flexibility in network topology (ring, line)
 - Redundancy support in ring topology
- Simple module setting with station no. setup (No IP setup required)
- Easy & Simple parameter setup: Autoscans for module add, checkbox for parameter setup (No program required)
- High-speed data processing
- Cost reduction in wiring
- Various diagnostic service
 - Station no. collision error
 - Remote batch processing in O/S upgrade via master module
 - Network status check by CRC error flag
 - Enhanced Autoscans function: station collision, module information, etc.
 - Error flag: comm. error between master and Smart I/Os



Specification

	Item	Content
Transmission Specifications	Transmission speed	PORT1/2: 100Mbps
	Transmission method	Base band
	Maximum distance between nodes	100m@CAT5E or higher
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable
	Maximum protocol size	1,500Bytes
	Communication network access method	CSMA/CD
	Frame error check method	CRC32
Max. load		Ethernet: 10,000pps, RAPIEnet: 40,000pps
Topology		When using RAPIEnet: Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet: Line, Tree, Star etc. (with switch)
Diagnosis function		Station number / IP collision detection function, self-diagnosis service, diagnosis using XG5000
Station number / IP setting method		Rotary switch, XG5000, BOOTP/DHCP
Station number / IP setting range		Station number: Rotary switch(1~99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)
Status indication LED		STATUS, PORT1, PORT2, LACTH(output Only)
Parameter setting		XG5000(Ethernet)
Device file		EDS file(Only EtherNet/IP)
Protocol		RAPIEnet, EtherNet/IP, Modbus-TCP, BOOTP, DHCP(RAPIEnet, EtherNet/IP can be Smart extension with XGL-EFMxB)
I/O Refresh size	Max inputs: refresh size	64 bytes
	Max outputs: refresh size	64 bytes

Network service specification

Item		Content
RAPIDnet	Data processing unit	Byte(8bit)
	Max read data size	1,400 byte
	Max write data size	1,400 byte
	Max No. of connected stations per network	64 station
EtherNet/IP	Data processing unit	Byte(8bit)
	Max read data size	Non-periodic tag: 1,400 Byte Non-periodic object: 1,024 Byte Cycle: 1,024 Byte
	Max write data size	Non-periodic tag: 1,400 Byte Non-periodic object: 1,024 Byte Cycle: 1,024 Byte
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object
	Maximum number of connections	Connection-type (Cycle) :10 Non connection type(Non-periodic) message(Tag, Object):10
Modbus TCP/IP	Data processing unit	Word(16bit),bit
	Max read data size	125 Word(2,000 Bits)
	Max write data size	123 Word(1,968 Bits)
	Maximum number of connections	64

Input/output specification

Item		GEL-D24C	GEL-DT4C1	GEL-TR4C1	GEL-RY2C		
Digital I/O	Points	32(Input)	16/16(In/Out)	32(Output)	16(Outputs)		
	Rated input current	5mA	-	-	-		
	Rated load voltage	-	DC24V	DC24V/AC220V, 2A/point, 5A/COM			
	Max. load current	-	0.5A/point, 3A/COM	AC250V, DC110V, 1,200times/hour			
	On voltage	DC 19V or higher	-	Min. switching load :			
	Off voltage	DC 6V or less	-	DC 5V/1mA			
	Insulation method	Photo coupler insulation					
Item		GEL-AV8C	GEL-AC8C	GEL-DV4C	GEL-DC4C		
Analog I/O	Channels	8		4			
	Input/output type	Voltage	Current	Voltage	Current		
	Input/output range	1 ~ 5V	4 ~ 20mA	1 ~ 5V	4 ~ 20mA		
		0 ~ 5V		0 ~ 5V			
	Accuracy	0 ~ 10V	0 ~ 20mA	0 ~ 10V	0 ~ 20mA		
		-10 ~ 10V		-10 ~ 10V			
	Max. resolution	0.3% (ambient air temperature 0 ~ 55°C)					
Max. conversion rate		1/16,000					
Insulation method		10ms / channels					
		insulation between input / output terminal and PLC power (no insulation between channels)					

XEL-BSSRT, XEL-BSSRF, XEL-BSSRH

- Slave PLC system configuration: XEL-BSSRx (extension Smart I/O adaptor) with XGB I/Os (DI/DO/AI/AO)
 - No. of XGB extension I/O: 8
- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol support
- Electric/Fiber-optic/Hybrid module comm. speed: Max. 1Gbps
- 2-port (dual port) support
 - No additional switch required for ring/line topology configuration
- Ring-to-line: fast reconfiguration to line topology for a line fault of ring
- Diagnostic function for service status



Specification


	Item	XEL-BSSRT	XEL-BSSRF	XEL-BSSRH			
Transmission Specifications	Transmission speed (Mbps)	100/1000	100/1000	Electric: 100/1000 Optical: 100/1000			
	Transmission method	베이스밴드					
	Maximum distance between nodes	100m@CAT5E or higher	2km@100Mbps.MM	Electric: 100m Optical: 2km			
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable					
	Maximum protocol size	1,500Bytes					
	Communication network access method	CSMA/CD					
	Frame error check method	CRC32					
Max. load	Ethernet: 10,000pps, RAPIEnet: 40,000pps						
Topology	When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)						
Diagnosis function	Station number / IP collision detection function, self-diagnosis service, diagnosis using XG5000						
Station number / IP setting method	Rotary switch, XG5000, BOOTP/DHCP						
Station number / IP setting range	Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)						
External connecting terminal	USB mini B : PADT connection RJ45, SFP : PADT connection, data communication 3pin Push in/Screw fixed type connector : power Input						
Status indication LED	RUN, RMS, RNS, RELAY, LINK/ACT1, LINK/ACT2 6 types						
Parameter setting	XG5000(USB, Ethernet)						
Device file	EDS file(Only EtherNet/IP)						
Maximum number of modules to be installed	8ea						
Protocol	RAPIEnet, EtherNet/IP, Modbus-TCP, BOOTP, DHCP (RAPIEnet, EtherNet / IP can be Smart extension with XGL-EFMxB)						

Network service specification

	Item	XEL-BSSRT	XEL-BSSRF	XEL-BSSRH
RAPIDnet	Data processing unit		Byte(8bit)	
	Max read data size		1,400 Byte	
	Max write data size		1,400 Byte	
	Max No. of connected stations per network		64 station	
EtherNet/IP	Data processing unit		Byte(8bit)	
	Max read data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Max write data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Available communication type		Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic) message: Tag, Object	
	Maximum number of connections		Connection-type (Cycle): 10 Non connection type(Non-periodic) message(Tag, Object): 10	
Modbus TCP/IP	Data processing unit		Word(16bit),bit	
	Max read data size		125 Word(2,000 Bits)	
	Max write data size		123 Word(1,968 Bits)	
	Maximum number of connections		64	

Available XGB I/O Module

	Item	Module		Item	Module
Digital	Input	XBE-DC08A	Output	XBF-DV04A	
		XBE-DC16A/B		XBF-DC04A	
		XBE-DC32A		XBF-DC04B	
		XBE-AC08A		XBF-DV04C	
	Output	XBE-TN/TP08A		XBF-DC04C	
		XBE-TN/TP16A		XBF-AH04A	
		XBE-TN/TP32A		XBF-RD04A	
		XBE-RY08A/B		XBF-RD01A	
		XBE-RY16A		XBF-TC04B	
Analog	Input/output	XBE-DR16A	TC	XBF-TC04S	
		XBE-DN32A		XBF-LD02S	
	Input	XBF-AD04A	Load cell	XBF-HO02A	
		XBF-AD08A		XBF-HD02A	
		XBF-AD04C	High-speed counter	XBF-HD02A	

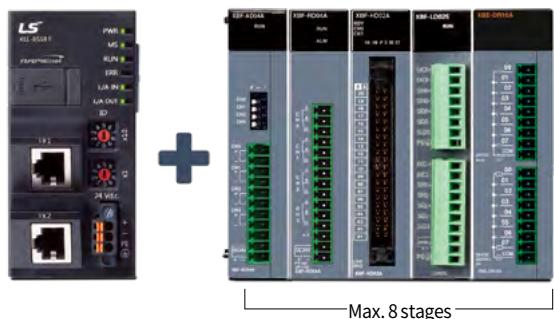


XOL-ES4T, XOL-ES4H

- Multi-port switch to integrate RAPIEnet, Modbus TCP/IP and EtherNet/IP network
- Max. 64 stations including master module
- Simple module setup with station no.: no additional S/W required.
- Module status information in XG5000 (Autoscan)
- Available from RAPIEnet v2.0 or later.




Various system methods can be configured by using MRS


2 Ring System [Ring to Ring]

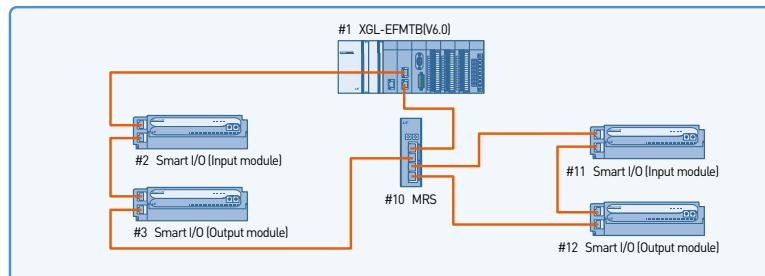


1 Ring / 1 Line System [Ring to Line]

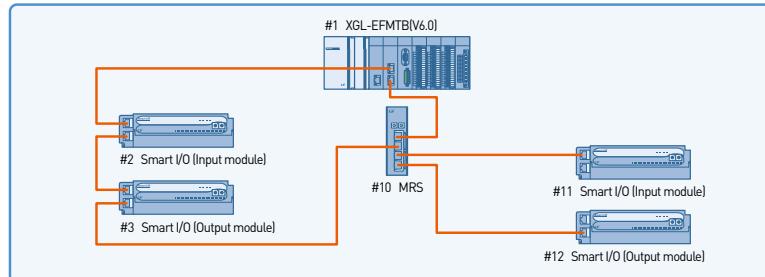

2 Line System [Line to Line]

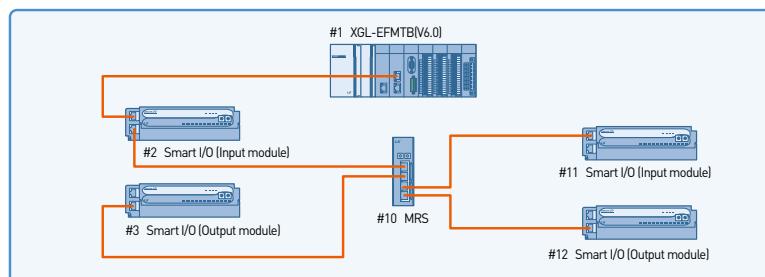

1 Line / 1 Ring System (Line to Ring)

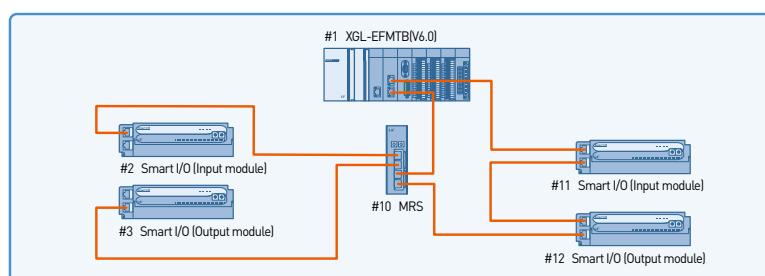


Specification


Item		RAPIEnet	
		XOL-ES4T	XOL-ES4H
Transmission Specifications	Transmission speed	100Mbps(1,2 port) 100Mbps/1 Gbps(3,4 port)	100Mbps/1 Gbps (1,2 port, electric) 100Mbps/1 Gbps (3,4 port,optical)
	Port type and number of ports	RJ45 4Ports	RJ45 2Ports, LC 2Ports
	Transmission distance	100m	100m/2km
	Diagnosis function	LED display	LED display
Basic Specifications	Power supply(DC)	24V(Input range:20.4~28.8V)	
	Current consumption(mA)	300	300
	Weight(g)	200	280

Various system methods can be configured by using MRS (Ethernet compatibility)

RAPIEnet[1,2 Port], Ethernet[3,4 Port]

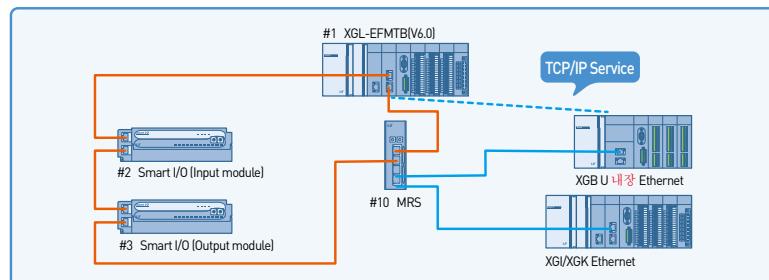


Ethernet[1,2 Port], RAPIEnet[3,4 Port]

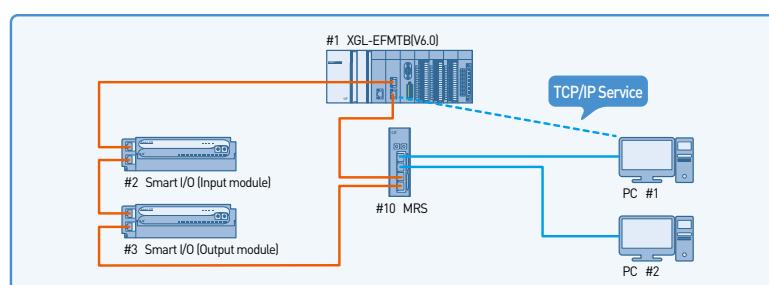


Ethernet, RAPIEnet[1,2 Port],

Ethernet[3,4 Port]

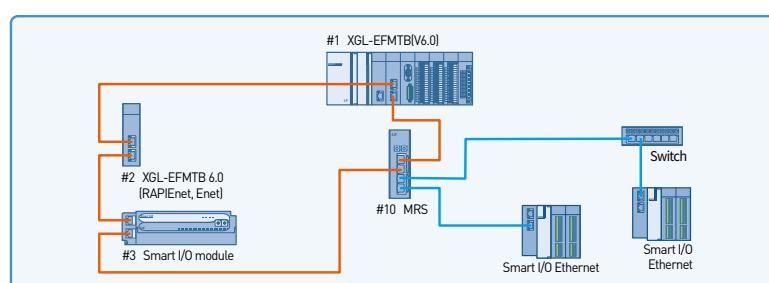

RAPIEnet, Ethernet[1,2 Port],

RAPIEnet, Ethernet[3,4 Port]

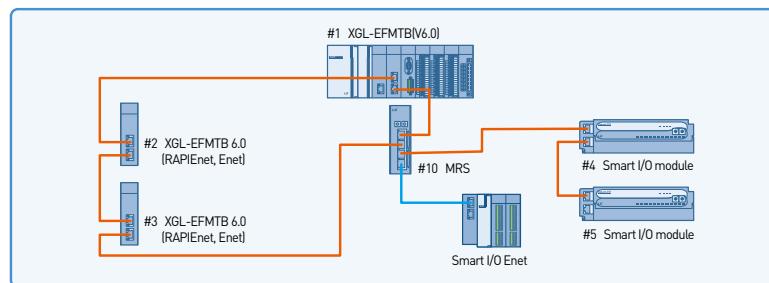

XOL-RCPUA

- Connect to RAPIEnet+ network from a PC
- Easy installation to PCIe slot on a PC
- Simple driver installation




Specification


Item		XOL-RCPUA	Remark
Data Memory	I Variable	16KB	
	Q Variable	16KB	
Direct variable	M	1MB	
	W	512KB	
Flag variable	F	8KB	System Flag
	L	22KB	Link Flag
	U	4KB	Analog data refresh
	N	49KB	P2P Parameters
Operation Mode		RUN, STOP	
Restart Mode		Cold, Warm	
Programming Port		USB(1Ch), Ethernet (1Ch)	
Weight (g)		200	

RAPIEnet+ System Configuration with XOL-RCPUA


Ring topology with Ethernet/IP and Modbus configured through RAPIEnet+

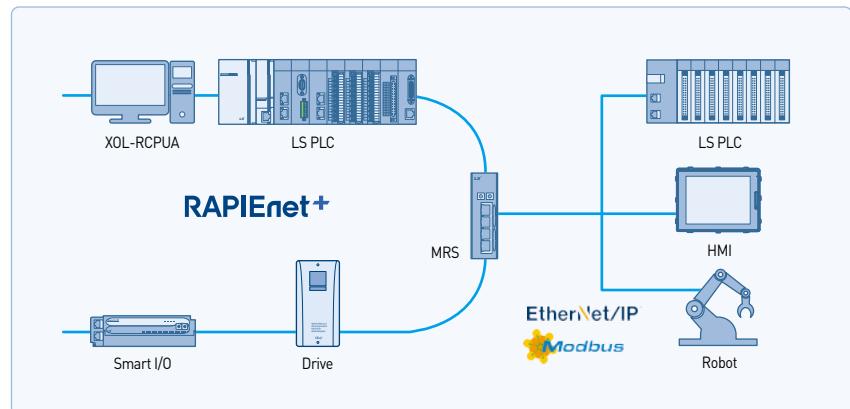

Daisy Chain configuration with RAPIEnet+, Ethernet/IP, or Modbus

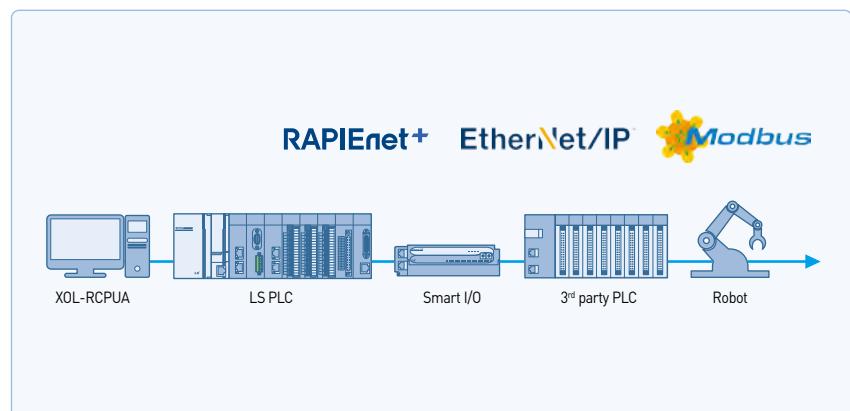

Star topology configuration with Ethernet/IP or Modbus

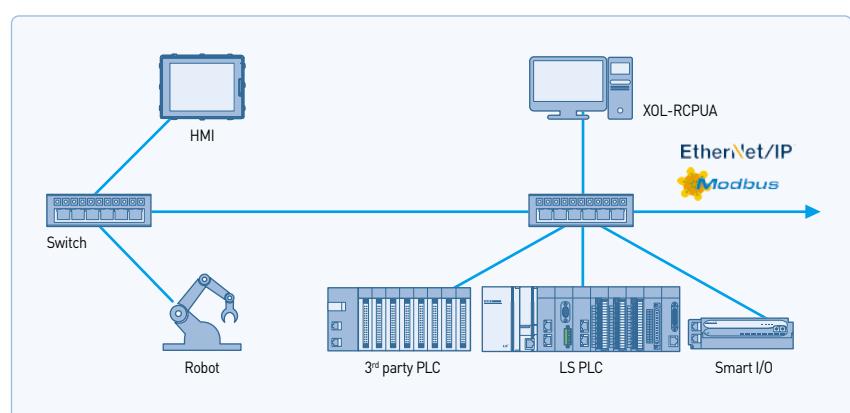

XGF-EOPCT

- OPC UA Server (OPC Unified Architecture, IEC 62541) communication protocol
- Max. 10 devices can be connected to OPC UA Client (Session)
 - Max. 50 subscription channels can be created, 10 per session
 - Max. 1,000 subscriptions per channel, up to 5,000 variables (MonitoredItem) can be registered
- History function that can store a total of 3,000 histories for up to 64 variables
- Alarm/Event (LimitLevel, OffNormal) function provided for up to 100 variables
- Provides various diagnostic functions and module/network status information
 - Status of communication module
 - Communication service (P2P, dedicated protocol server, OPC UA server) status
 - AutoScan function that provides information on our modules connected within the network
 - PING function to check the connection of other modules
 - Packet type and average packet transmission/reception data received by module (network load can be predicted)
 - Diagnostic function for communication module through network



Specification


Item			XGL-EOPCT
Transmission Specifications	Transmission speed (Mbps)		10/100/1000
	Transmission method		Baseband
	Maximum distance between nodes		100m (Node-Switch)
	Minimum distance between nodes	1m or more recommended	Note1)
	Send media	Category 5E or higher STP (Shielded Twisted-pair) cable	
	Maximum protocol size	1,500 Byte	
	Communication network access method	CSMA/CD	
	Frame error check method	CRC32	
Max. load			10,000pps
Topology			Line, Tree, Star
Diagnosis function			IP collision detection function, Diagnosis using XG5000
Station number / IP setting method			XG5000, DHCP
External connecting terminals			word (16 bit), bit
Modbus/TCP Service Specific			125 word (2,000 bit)
			123 word (1,968 bit)
Basic Specific	Current consumption (mA)	100Mbps	560
		1Gbps	900
	Weight(g)		146

Note 1) When using a cable shorter than 1m, the SNR (Signal to Noise Ratio) may decrease due to the influence of reflected waves, which may result in link down or packing loss.

Communication service specification

Item	XGL-EOPCT		
Supported Security Profiles	Encryption setting (security policy)		<ul style="list-style-type: none"> No Security Basic 128Rsa15 Basic 256 Basic 256Sha256
	Signature setting (security mode)		<ul style="list-style-type: none"> None: no security Sign: add signature Sign & Encrypt: add signature and encryption
	User authentication setting		<ul style="list-style-type: none"> Anonymous User name/password
Max. number of installation	P2P Service	XGK/XGI	8ea
		XGR	6ea
	Server Service	XGK/XGI	24ea(Installed on the expansion base)
		XGR	6ea(Cannot be Installed on the expansion base)
Modbus / TCP	User authentication setting		Approximately 14,000 (Up to 1.5MB)
			10
	Max write data size		10 / 50
	Maximum number of connections		1000 / 5000
	Max read/write data size		20ms~1000ms
Maximum number of connections		20ms~1000ms	

System configuration (Example)

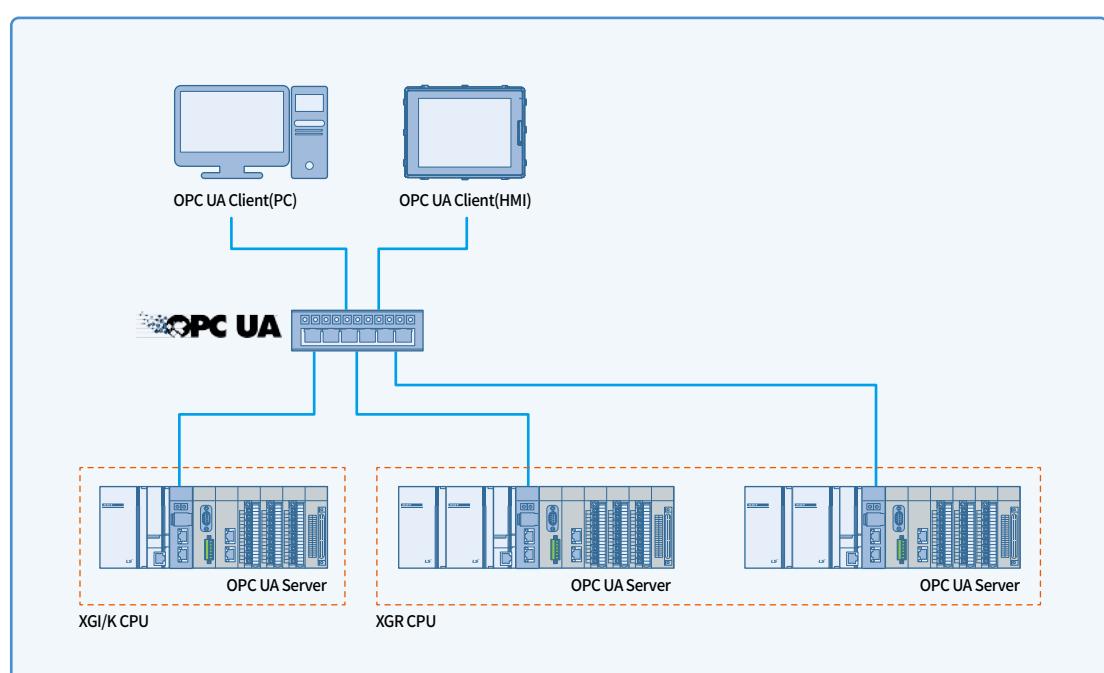

Computer-Link [Cnet]

XGL-C22B, XGL-CH2B, XGL-C42B


- Smart server recognizes the protocol (XGT dedicated communication or Modbus RTU/ASCII) automatically and operates.
- Repeater mode is able to use as an insulated repeater or convert RS-232C to RS422/485.
- Contains built-in termination resistor and it can be set in the basic parameter window.
- Easy protocol editing and communication parameter setting: XG5000
- Long-distance communication via modem connection
- Dedicated protocol for multi-drop configuration connectable up to 32 units
- RS-232C/422 communication port
- Flexible communication speed setting (300~115,200bps)
- Supporting full duplex and half duplex communication
- Max. 12 modules available in one CPU
- P2P service: User-defined communication and XGT/Modbus master
- Various connection to MMI S/W (XGT, Modbus RTU, Modbus ASCII)
- Various diagnosis functions using XG5000 (I/O, link status, service status)
- Communication service information (Dedicated service, P2P service)
- Supporting simultaneously dedicated service in remote connection
- Communication without additional setting when replacing communication module




Various independent operation mode

- Operation mode
- Dedicated protocol mode (Simultaneous support)
- Program upload/download by XG5000 protocol (RS-232C)
Communication using LS ELECTRIC dedicated protocol
- User-defined communication of P2P mode and XGT/Modbus master

Communication via RS-232C/422

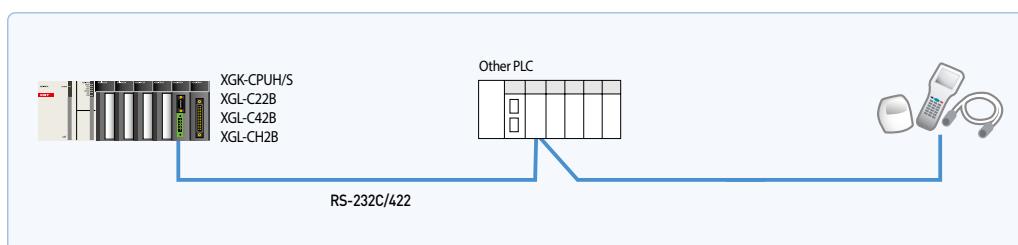

1:N and N:M connection (LS ELECTRIC and other)

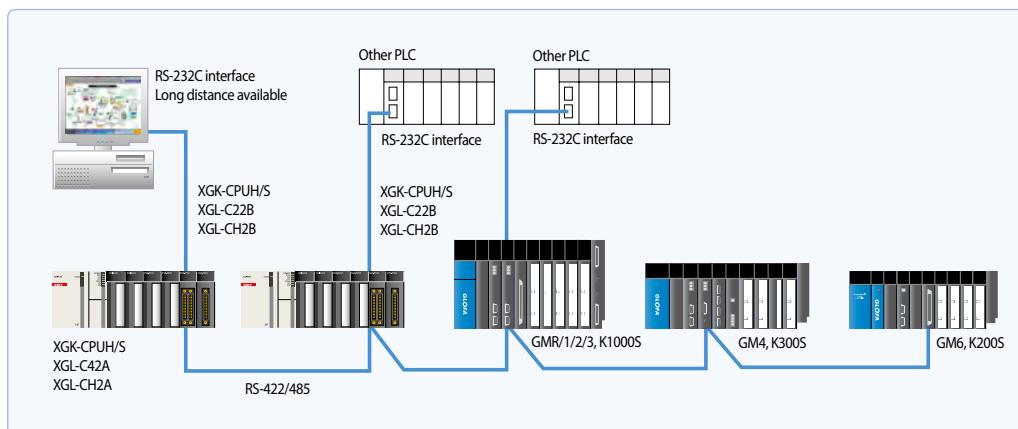


Specifications


Item		Specification				
		XGL-C22B	XGL-CH2B	XGL-C42B		
Serial communication channel	RS-232C	2 channels	1 channel	-		
		Conforms to RS-232C standard				
	RS-422/485	1:1		2 channels		
		1 channel				
		Conforms to RS-422/485 standards				
		1:1, 1:n, n:1				
Modem connection function		Remote communication with external devices is available via public telephone line by connecting external modem to the module.		-		
Operating mode (specified per port)	P2P	XGT client, Modbus ASCII/RTU client, Use defined communication				
	SERVER	XGT server, Modbus ASCII/RTU server				
Data type	Start Bit	1				
	Data Bit	7 or 8				
	Stop Bit	1 or 2				
	Parity	Even/Odd/None				
Synchronization type		Asynchronous type				
Detecting error		BYTE SUM, WORD SUM, BYTE XOR, DLE AB, DLE SIEMENS, LS ELECTRIC CRC, CRC 16, BYTE SUM 2'COMP, BYTE SUM 1's COMP 7BIT SUM, 7BIT XOR, CRC 16 IBM, CRC 16 CCITT				
Transmission speed (bps)		300/600/1,200/1,800/2,400/3,600/4,800/7,200/9,600/19,200/38,400/57,600/64,000/76,800/115,200 bps				
Station No. setting		Setting range : 0-31, Max. station No. : 32 stations				
Transmission Distance(m)	RS-232C: Max.15 (extendible if modem used)		-			
	-		RS-422/485: Max. 1,200m			
Diagnosis function		Status LED diagnosis XG5000 diagnosis service(Frame monitor, Status by service, Loop-Back diagnosis) History, Saving history				
Appearance size(mm)		98(H) X 27(W) X 90(D)				
Current consumption(mA)		420	480	520		
Weight(g)		121	119	116		

* XGL-CH2A / C42A and XGL-CH2B / C42B differ from RS-422 / 485 communication connector wiring, you refer to the operation manual.

Modbus

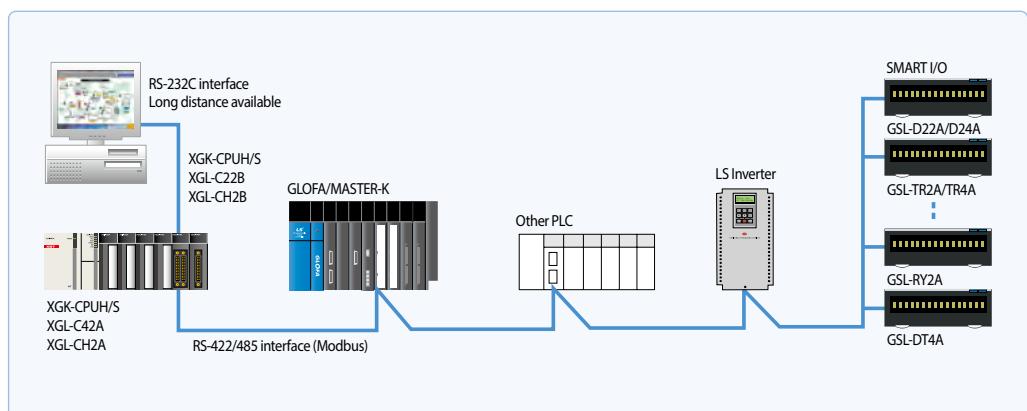

Cnet cable connection

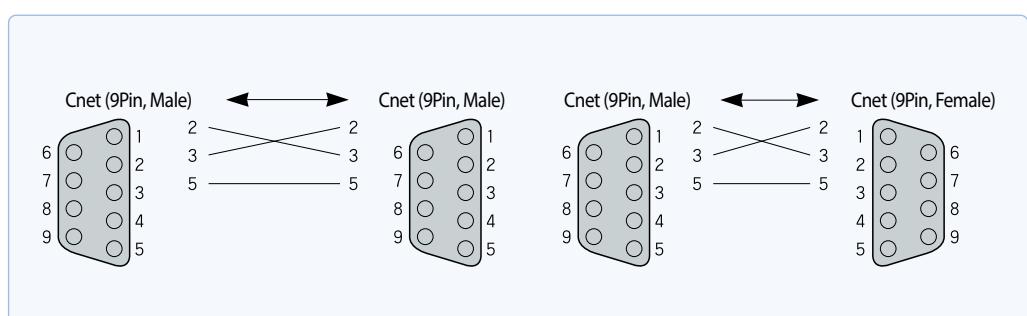


XGL-DMEB,
XGL-DSEB



- DeviceNet protocol
- Direct control of various I/O devices via Dnet system
- Max. 63 slave modules controlled by one master module
- Flexibility in network configuration: Multi-drop and T branch connection
- Connectable to other master module and various slave modules
- Providing 'Auto Network Scan' function and various information with configuration tool (N Configurator)
- Communication using High-speed link parameter
- Connectable to various slave I/O including other module
(Common I/O, Actuator, Switch, Optical switch, Valve, Inverter, A/D module, Position controller etc.)
- Automatic monitoring of slave modules in the network: Auto-scan (XG5000)
- Easy expansion: up to 12 master modules
- Network setting by N Configurator/XG5000(Parameter setting, diagnosis and monitoring)


System
configuration with
LS ELECTRIC
products

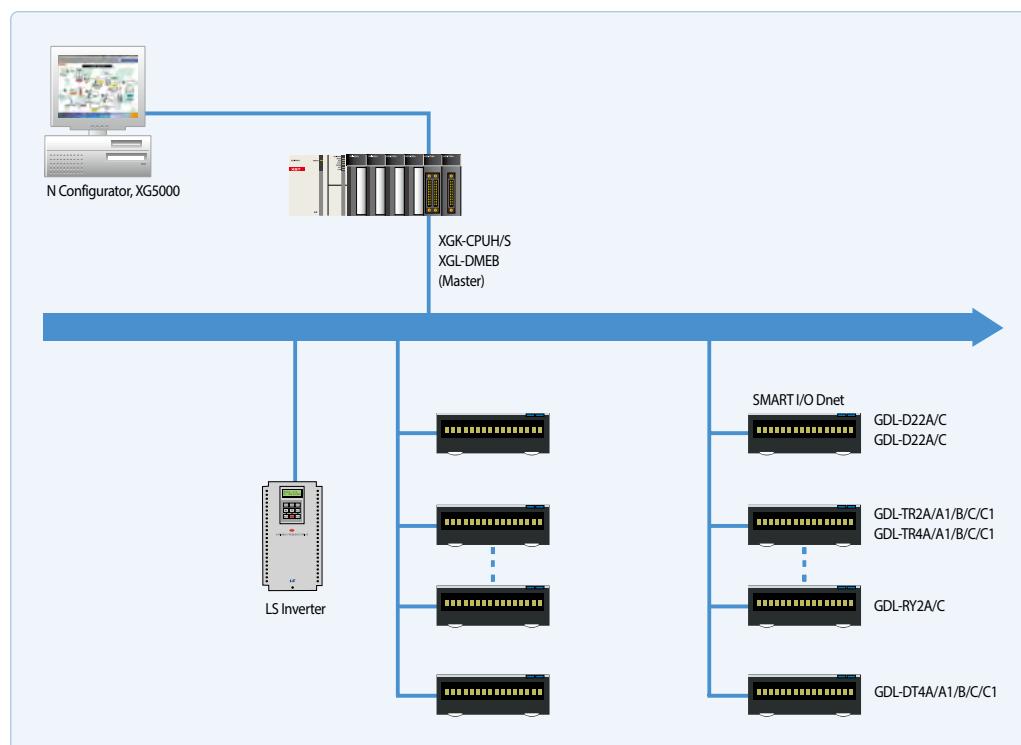

Specifications

Item		Performance Specifications
Transmission Specification		125/250/500
Transmission Type	I/O Connection	G2, UCMM
	I/O Communication	Poll, Bit strobe, COS, Cyclic
Communication distance(m)	Thick Cable	500 (125kbps)/250 (250kbps)/100 (500kbps)
	Thin Cable	100 (125/250/500kbps)
Terminal resistance [W]		121 (1%, 1/4W)
	125 kbps	6 (Max. extended length 156)
Max.drop length(m)	250 kbps	6 (Max. extended length 78)
	500 kbps	6 (Max. extended length 39)
Data Packet		0~8 Bytes
Message Access Control		CSMA/NBA
Network Structure		Trunk/drop line Power/Signal cable inside the identical network cable
Bus Type		Poll type
Max. number of nods		Up to 64 (including master) MAC IDs (MAC Identifier)
System Features		Insertion and removal of nod available in voltage On status
Operation Voltage		DC 24V
Diagnosis Function		Module: Checks duplicated station/ Checks CRC error N Configurator: Detects defective station/Checks BusOff/Auto-scan function XG5000: Monitors High-speed link
Master/Slave Operation		Available only in master
Parameter setting		1) N Configurator (CONFIG Port of Dnet I/F) 2) Setting to High-speed link of XG5000 (RS-232C of CPU module or USB port)
XG5000 (High -speed link)	Data process unit	Byte
	Send/Receive period	Select among 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s and 10s - Default : 20ms
	Max. communication point	Send 128,520points, Receive 128,520 points, 16,065 bytes respectively
	Max. block number	63 (Setting range: 0~62)
	Max. point number per block	2040 points (255 bytes)
	Max. modules installed	Up to 12 (available on basic base and added base)
	Internal-consumed current (mA)	350mA
Basic Specification	Weight (g)	81g

System configuration with other products

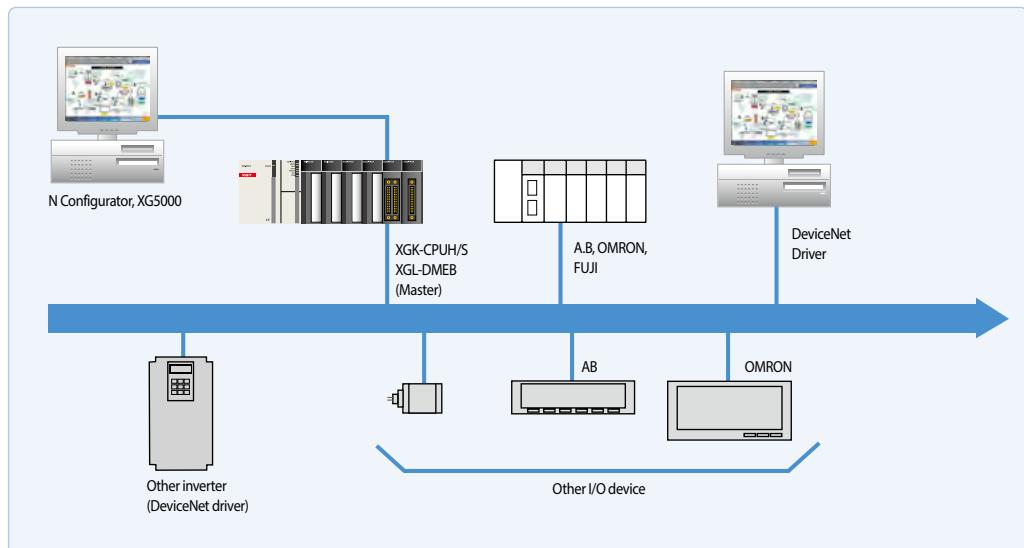


XGL-PMEB

- Profibus-DP protocol
- Proper to communicate among a master automation device and distributed slave I/O devices.
- Fast slave communication without application layer
- Transmission speed: 9.6Kbps ~ 12Mbps
- Transmission distance: Max. 1,200m
- Max. 126 slave stations available (32 stations per segment)
- Network setting using N Configurator / XG5000 (Parameter setting, diagnosis and monitoring)
- I/O data of master station: 7kbytes
- Automatic monitoring of slave modules in the network: Auto-scan (XG5000)
- Multi master
- Easy configuration tool : N Configurator / XG5000




System configuration with LS ELECTRIC products

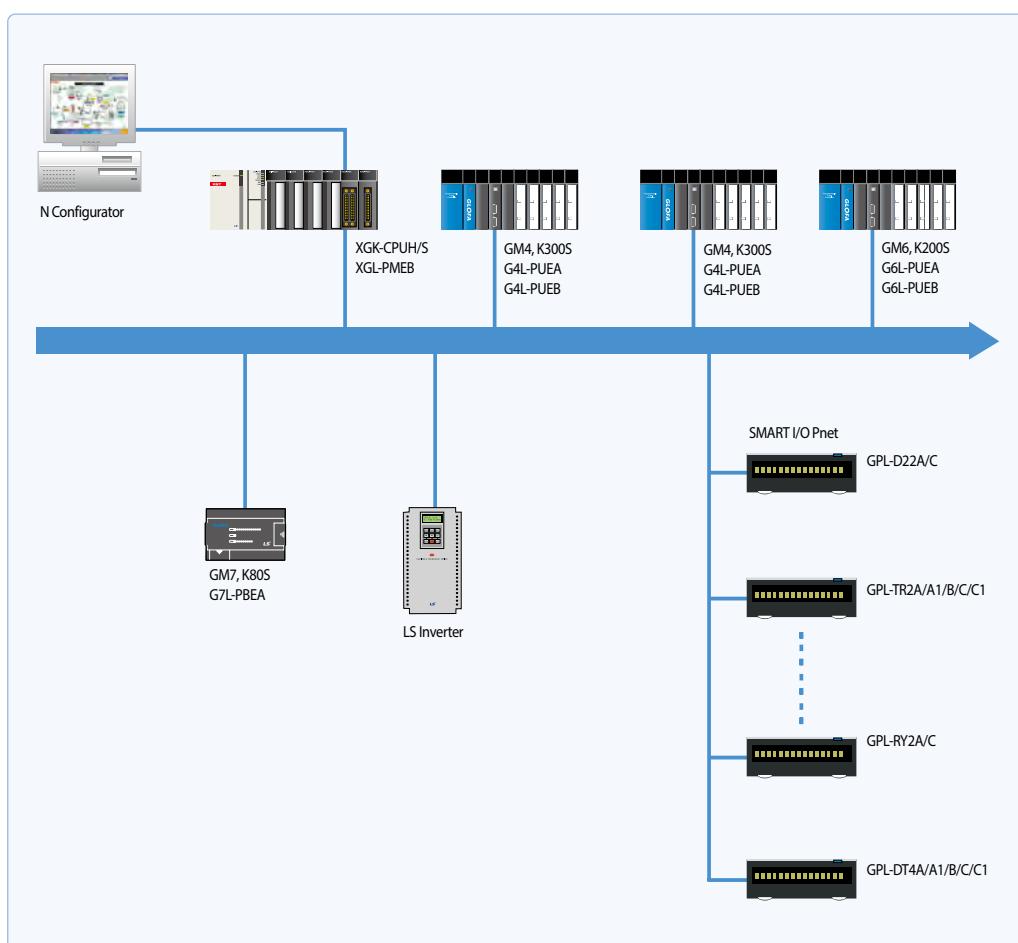

Specifications

Item	XGL-PMEB	
Module Type	Master	
Network Type	Profibus-DP	
Standard	EN50170/DIN19245	
Interface	RS-485 (Electric)	
Transmission Route	Bus type	
Modulation Type	NRZ	
MAC	Local Token Ring	
Max. Distance & Transmission Speed	Distance (m)	Transmission Speed (bps)
	1,200	9.6k/19.2k/31.25k/45.45k/93.7k
	1,000	187.5k
	400	500k
	200	1.5M
	100	3M/6M/12M
Max. number of stations per network	126	
Max. number of stations per segment	32 (including master & repeater)	
Max. number of modules per node	24 modules	
Cable used	Electric-twist shielded pair cable	
Max. communication size	7 KB	
Max. size per slave	244 bytes	
Max. number of units to be installed	XGK-CPUH/XGI-CPUU	XGK-CPUS/CPUA/CPUE
	12	12
Installation Position	XGK-CPUH/XGI-CPUU	XGK-CPUS/CPUA/CPUE
	Basic base ~ expansion stage 7	Basic base ~ expansion stage 3
Communication Parameters to set	XG5000, SyCon (XGL-PMEA Dedicated Configuration Tool), N Configurator (XGL-PMEB/C Dedicated Configuration Tool)	
Internal-consumed current[mA]	500	
Weight (g)	88	

System configuration with other products

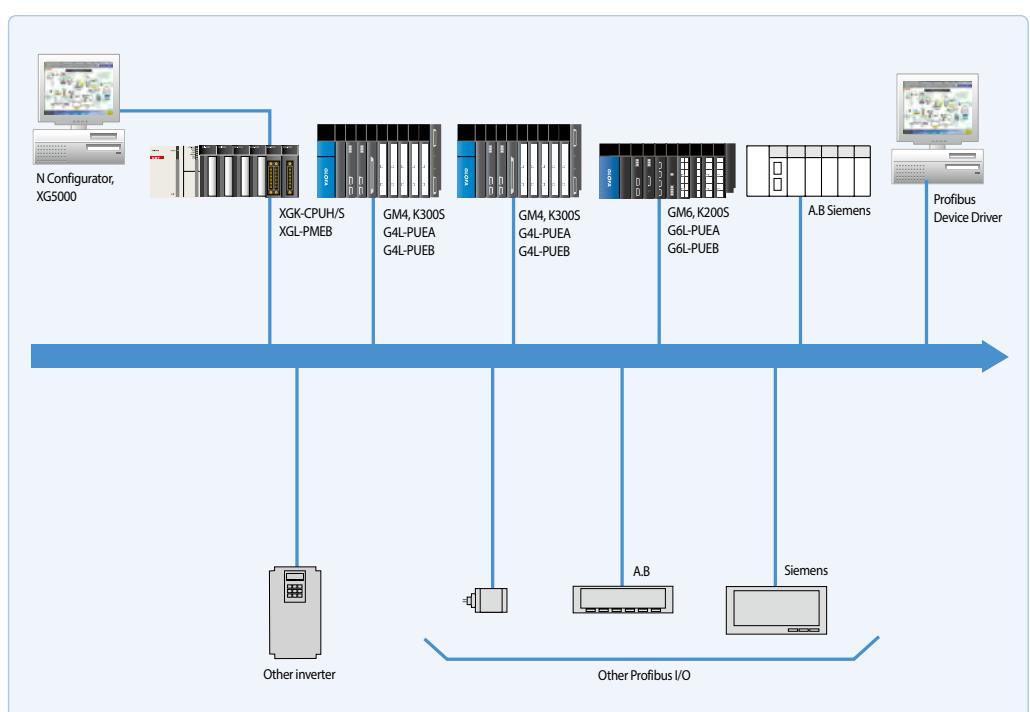


XGL-PSEA

- Profibus-DP
- Max. 98 stations available
- Other product Master <> Pnet Slave I/F Module connect
- I/O configuration through XG5000 high-speed link parameter
- Provides online network status monitoring
- Global Command
 - Sync, Unsync, Freeze, Unfreeze



System configuration with other products

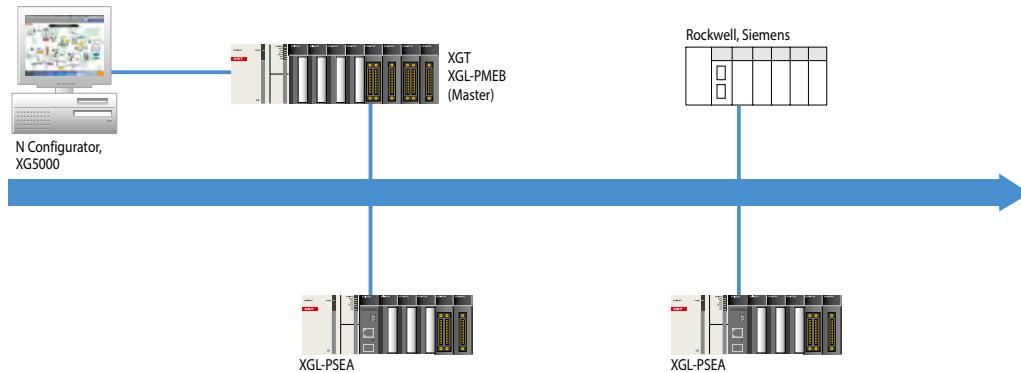

Specifications

Item		XGL-PSEA				
Standard		EN50170 / DIN 19245				
Interface		RS-485(Electric)				
Media access		Polling				
Topology		Bus				
Modulation		NRZ				
Network Interface		Auto baud rate				
Master / Slave		Slave				
Max. number of slave per network		99				
Max. number of slave per segment		32				
Cable		Shield twisted pair cable				
Max. I/O data		244 byte				
Configuration tool		XG5000				
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500
	Max. network length(m)	1200	1200	1200	1000	400
	Trans. speed(kbps)	1500	3000	6000	12000	-
	Max. network length(m)	200	100	100	100	-
Max num. of node		99(0~98)				
Max num. of transmission block		24				
Max num. of installation		12ea (XGR: Max. 6ea)				
Installation	XGK-CPUU/H, XGI-CPUU					Main base ~ 7 th Expansion base
	XGK-CPUE, XGI-CPUE					Main base ~ 1 st Expansion base
	XGK-CPUA / S, XGI-CPUE / S					Main base ~ 3 rd Expansion base
	XGR-CPUH/F, XGR-CPUE/T					Main base
Current consumption (mA)		410				
Weight (g)		103				

Profibus-DP [Pnet] Remote I/F system


72 / 73

XGL-PSRA

- Profibus-DP
- Remote base implementation
- Max. 98 stations available
- Various I/O module
 - DI/DO module
 - AI/AO/RTD/TC module
- Provides online network status monitoring
- Hot swap function



System configuration with other products

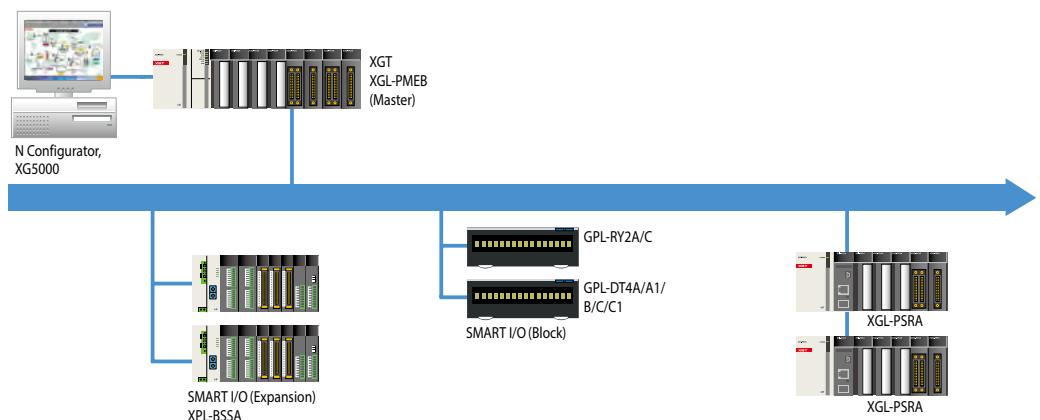


Specifications

Item		XGL-PSRA				
Standard		EN50170 / DIN 19245				
Interface		RS-485 (Electric)				
Media access		Polling				
Topology		Bus				
Modulation		NRZ				
Network Interface		Auto baud rate				
Master / Slave		Slave				
Max. number of slave per network		100				
Max. number of slave per segment		32				
Cable		Shield twisted pair cable				
Max. number of communication points		244 byte				
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500
	Max. network length(m)	1200	1200	1200	1000	400
	Trans. speed(kbps)	1500	3000	6000	12000	-
	Max. network length(m)	200	100	100	100	-
Max num. of node		100(0~99)				
Max. number of installation		12				
Max. digital I/O		768				
Max Analog I/O Channel		Input: 122ch. / Output: 96ch				
Current consumption (mA)		600				
Weight (g)		114				

XGL-RMEB

- Communication speed: 1Mbps
- Communication distance: Max. 750m
- Available to use max. 6 repeaters (Up to 5.25Km)
- Network management using Auto-scan
(Slave module information)
- Multi-drop network with smart I/O
- Network diagnosis and monitoring by XG5000
- Max. 63 stations of slave modules controlled
by one master module

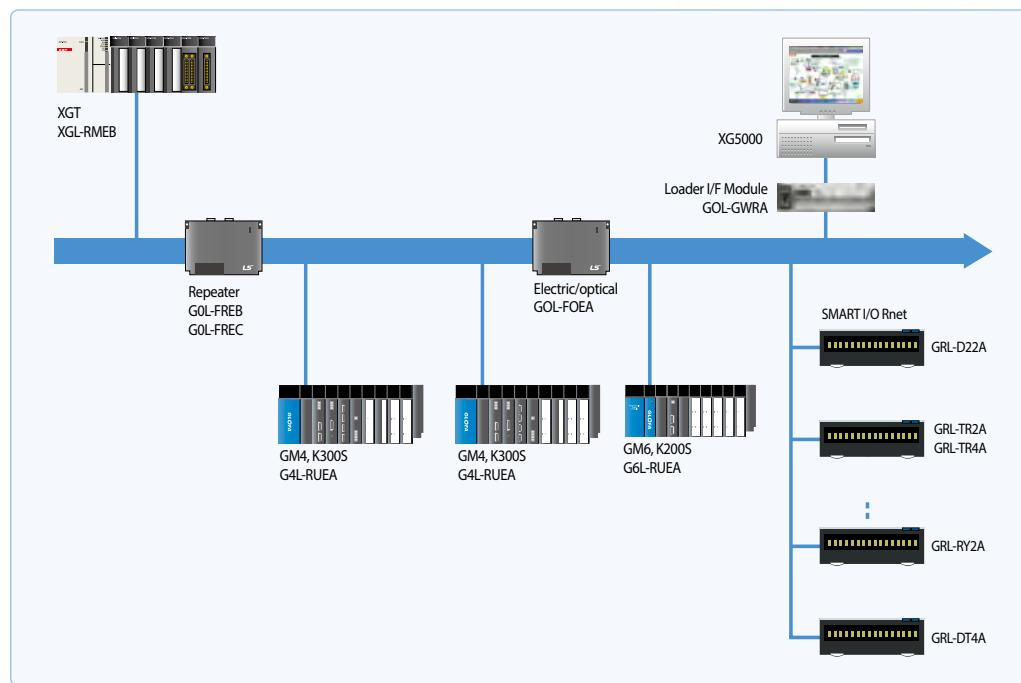**System configuration****Specifications**

Item		Specifications
Transmission Speed		1Mbps (Rnet I/F modules common)
Max. Tx distance		Max. 750m
Connection Cable		Twisted pair shielded cable - LIREV-AMESB 1Px22AWG (7/0.254);LS Cables
Maximum stations connected	Network	Master station 1[station no:0(fixed)] + Slave station 31[station no:1~63] = Max. 32 stations (In case of 32 stations, you have to use repeater.) - Only 1 master is available in the network.
Diagnostic function		XG5000 : High Speed Link Monitoring
System characteristic		Available detachment and attachment of slave module during communication
Terminal resistance(ℓ)		110Ω(6,1/2W)
Master/Slave operation		Only available as Master
XG5000 (HS Link)	Data Processing unit	Byte
	Tx/Rx cycle	Selection among 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s, 10s(default:200ms)
	Max. Communication points.	3,720bytes(slave 31stations * 120bytes/station)
	Max. Block number	63(setting range : 0~62)
	Max. points by Block	120 Byte(60words)
	Max. Tx. Block number	32 Blocks
Specification	HS Link number	Max. 12
	Max. module mounted	12 modules(Main Base + Extension Base)
	Internal current consumption(mA)	410
	Weight(g)	115

SMART I/O

- Reduction of wiring and real-time control of distributed I/O
- Various I/O module (16/32 points)



Repeater specifications

Item	Specifications
Type	GOL-FREB: AC110V ~ AC220V, GOL-FREC: DC 24V
Communication speed	1Mbps
Transmission method	Twisted pair shield cable
Transmission distance	Max. 750m per repeater
Max. number of installation between stations	Max. 6 repeaters
Max. distance between stations	5.25Km (when 6 repeaters are installed)
Fault data reception	Error data transmission
Frame error check	CRC 16 check

Network cable and peripheral devices

Item	Specifications	Remarks
Twisted pair electric	cable LIREV-AMESB, 2 1mm, 18AWG	LS cable
RF terminator	110, 1/2 W	

XGL-FMEA


- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan
- Max. 12ea on 1ea base
- Deterministic Network through Token Passing & Broadcasting
- 3,840 Word for each station
(Send 1920 Word /Receive 1920 Word)
- Max. number of block: Send 32blocks, Receive 64blocks, 60words for each block
- Max. communication points: 3840words
(64blockx60word)
- Setup: Parameter download via XG5000
- Diagnosis by XG5000: Communication module information, High speed link fault, Auto scan



Specification

Item	Description
Communication speed	1Mbps
Encoding method	Manchester Biphasic-L
Transmission length (for one segment)	Max. 750m
Transmission length (via repeater)	Max. 750m (6ea repeaters+1)=5.25km
Transmission cable	Twisted pair shield cable
Max. number of connection	64stations (32stations /segment, 64stations for repeater)
Max. protocol size	256 bytes
Access method	Circulated Token Passing
Frame error check	CRC 16 check
Max. number of installation	12ea
Installation base	Main base or expansion base
Current consumption (mA)	410
Weight (g)	120

System configuration

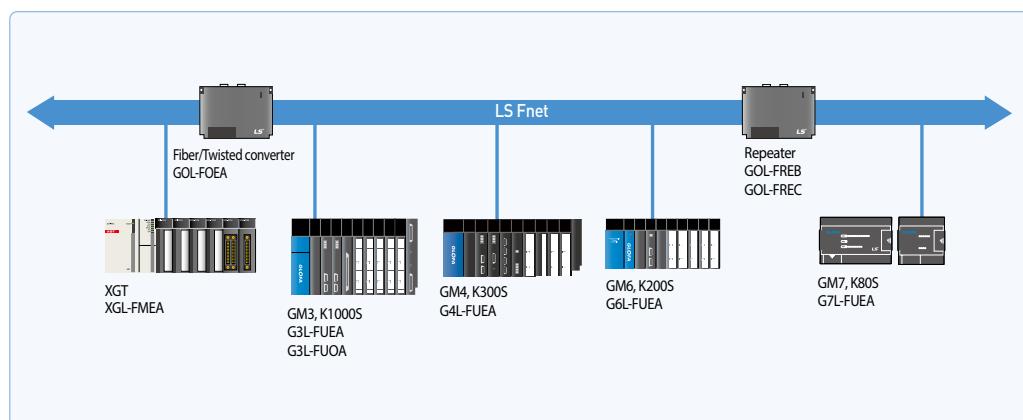

Ethernet switching hub

Programmable Logic Controller 76 / 77

XGL-EH5T


- Rack type: No external power
- Reliability for industrial standard
- Auto Crossover
- FG (Frame Ground) for RJ-45 connector
- Decreased communication error by shielded FTP/STP cable



Specification

Item		XGL-EH5T
Transmission	Communication speed	10/100Mbps
	Port type	10/100BASE-TX, TP cable, RJ-45 socket, 5ports
	Interface	Auto-Crossing, Auto-Nego, Auto-Polarity
	Distance	100m
	Diagnosis	LED (PWR, Link status, Data)
Current consumption (mA)		550
Weight (g)		90

System configuration

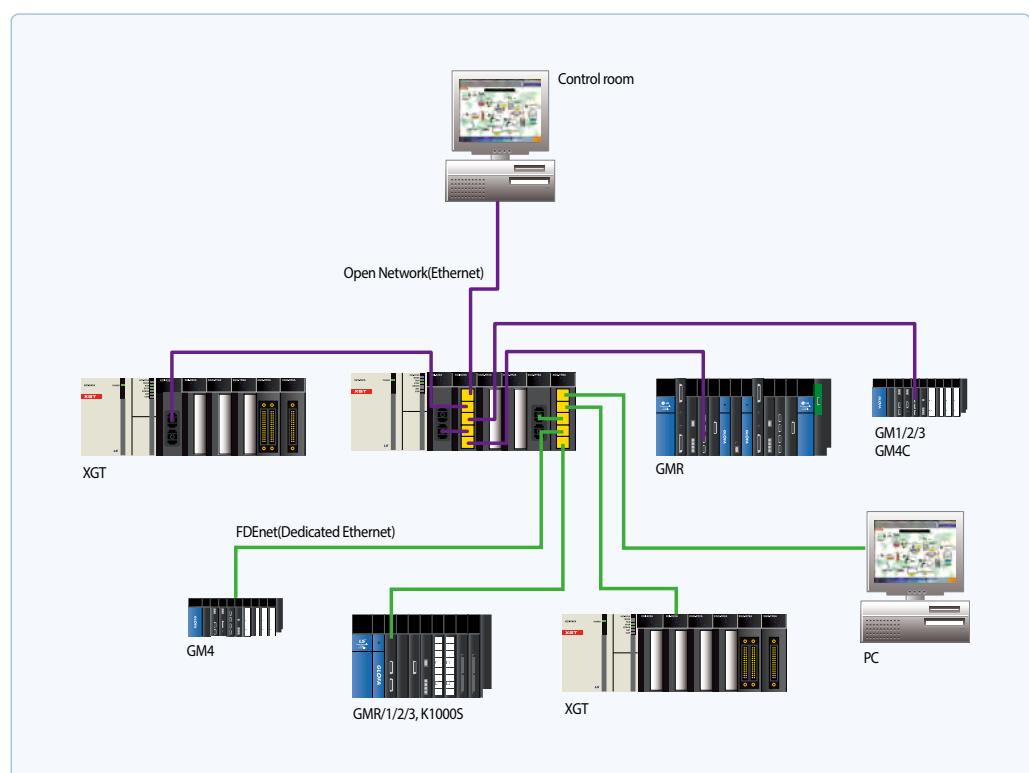


XGL-BIPT

- Compatibility: compatible with ANSI/ASHRAE 135-1995
- Provides 100BASE-TX media, and supports 100Mbps/Full Duplex.
- Up to 24 modules can be equipped per CPU module, and can be installed on main base or augmenting base. However, they can be installed only on main base in XGR system.
- With its internal switch function, it requires no switch or HUB, which reduces wires and provides flexibility in terms of installation.
- Makes cable works easier with its auto cross-over function.
- Provides various diagnosis functions and status information for modules and networks.



System configuration

XGL-BIPT module can be connected to BACnet Network using client/server, XGL-BIPT module is used as BACnet server, and sub-device can be controlled by being connected with exclusive power line communication (PLC).

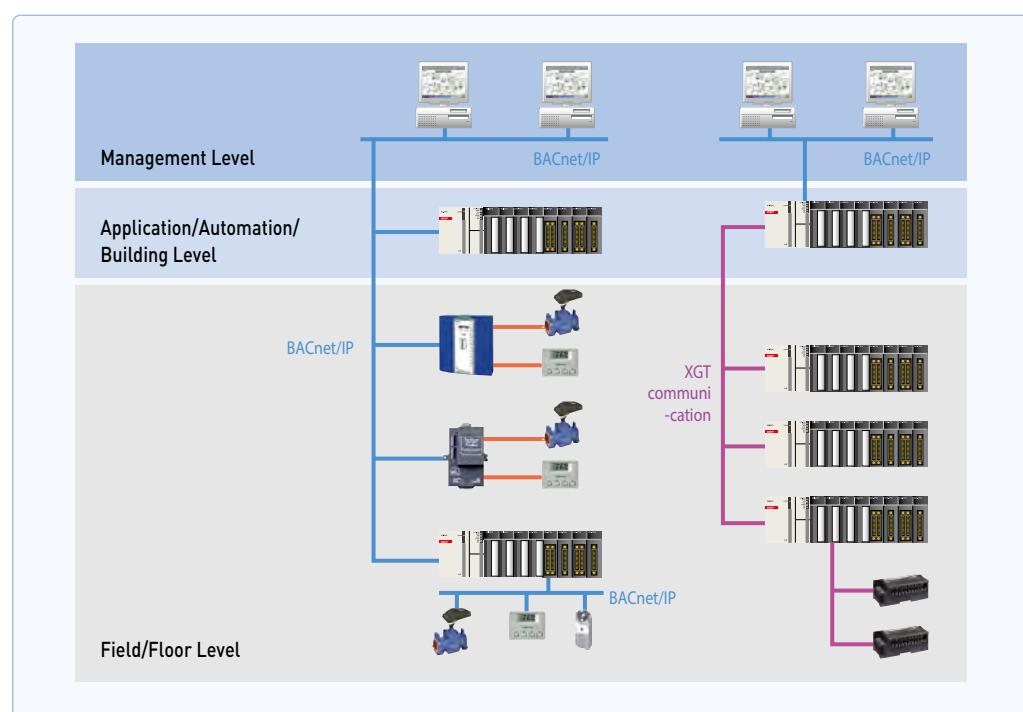

Device Profile	B-ASC + Client
Data Sharing	DS-RP-A, B DS-RPM-A, B DS-P-A, B DS-WPM-A, B
Device & Network Management	DM-DDB-B DM-DOB-B DM-DCC-A, B

Specifications

	Item	Specification
Transmission standards	Transmission speed	100Mbps
	Transmission method	Base band
	Maximum extension distance between nodes	100m
	Maximum size of protocol	1,536 bytes
	Communication access method	CSMA/CD
	Frame error check method	$CRC\ 32 = X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
Service	Maximum number of units installed	24 units
	Service type	P2P/Server
	Maximum communication data	1,400 bytes
	Support object(Server)	Device Object Binary Input Object Binary Output Object Analog Input Object Analog Output Object
	Diagnostic function	Communication module information Service status information Media information Ping test Auto scan DCC(Device Communication Control) System log
	External dimensions(mm)	90(H)×27(W)×90(D)
Basic standards	Current consumption(mA)	400
	Weight(g)	102

Communication among PLCs

This is a system configuration communicating between XGT PLCs by serial communication.


In this case, PLC 1 is the master (Client) and other PLC should be slaves (Server).

It is called Master/Slave communication. Master PLC is defined by comm. basic parameter and P2P setting.

And slave PLC is defined by basic parameter and driver setting.

Configuration

PLC1 reads present value, C0000 of PLC 2's up-counter and then saves it in M0200 of PLC1.

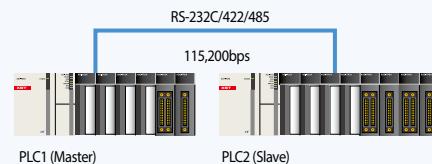

Data memory

PLC station	PLC memory	Setting Item
PLC 1	M0100	1. XG5000 parameter setting, 2. XG5000 programming
PLC 2	C0000	1. XG5000 parameter setting, 2. XG5000 programming

XG5000 setting


PLC setting 1 (Master)



Communication basic parameter setting
Setting up station number, communication speed, etc. And setting up the operation mode as P2P

P2P channel setting
Setting up channel 01 as [XGT client]

P2P setting
Setting up P2P block (READ)

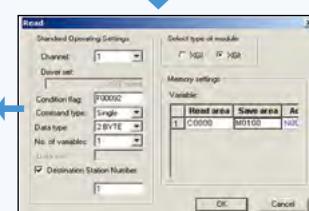

Communication data setting
Setting up Read area, Save area, etc.

PLC setting 2 (Slave)



Communication parameter setting
Setting up station number and channel 01 mode as 1 and XGT server




Parameter writing
Downloading parameters to PLC after online connection


* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

PLC station 2 setting
Make up-counter program using CTU command



PLC station 1 setting
Check out the counter value of M0100 is transmitted.



HMI communication configuration

configuration


This is a system configuration to monitor and control PLC (XGT) by XP (HMI). In this case, PLC is the slave (Server) and XP should be the master (Client). PLC is defined by comm. basic parameter and driver setting.



Data memory


PLC memory	Setting item	PMU
M000D1	1. XG5000 parameter setting	Using touch tag
	2. XG5000 programming	

XG5000 setting

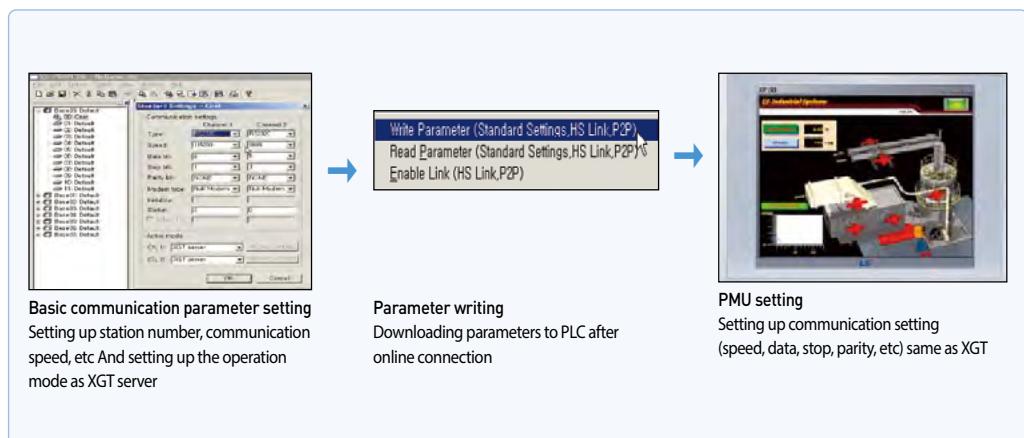

XG5000 programming

Create program that P00010 is on right after M00001 is on.




Communication example (Ethernet)

HMI
communication
configuration

configuration

This is a data communication system configuration among XGT PLCs via Ethernet network.
In this case, communication is possible by HS link among PLCs.
It just needs basic parameter setting and HS link item setting.


Read the up-counter value
C0000 of PLC1 and monitor
it in GLOFAview.

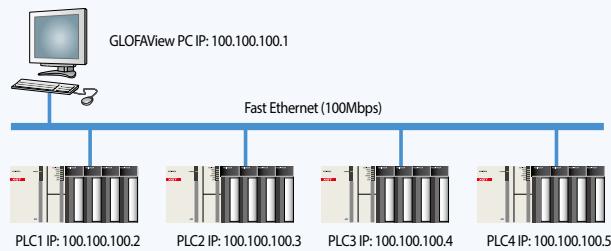

Data memory

PLC station	Setting item	GLOFAView
C0000	1. XG5000 parameter setting	Using analog tag
	2. XG5000 programming	

XG5000 setting

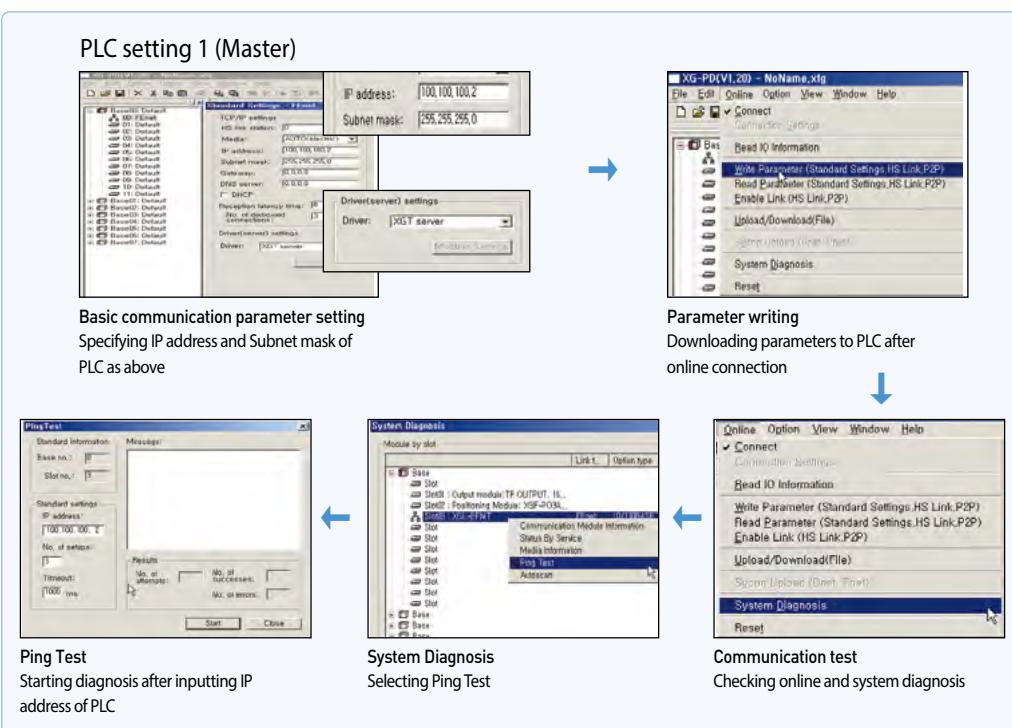


* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Make the up-counter program
using CTU command.


Check out if the counter
value of CTU value is transmitted.



High-speed link communication

configuration


This is a configuration for XGT to communicate each other via Ethernet.
It just needs communication basic parameter setting and High-speed link item setting.

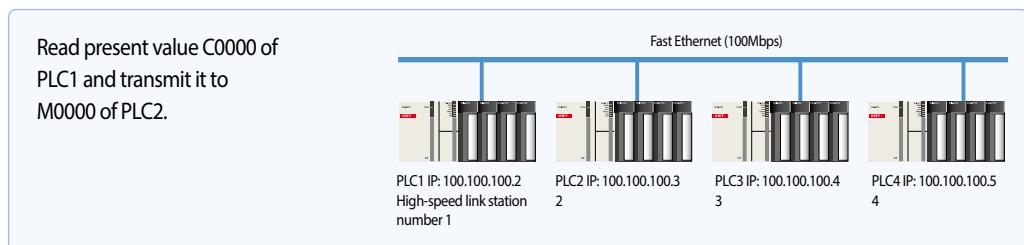

Data memory

PLC station	PLC memory	Setting Item
PLC1	C0000	1. XG5000 parameter setting, 2. XG5000 programming
PLC2	M0100	1. XG5000 parameter setting, 2. XG5000 programming


XG5000 setting

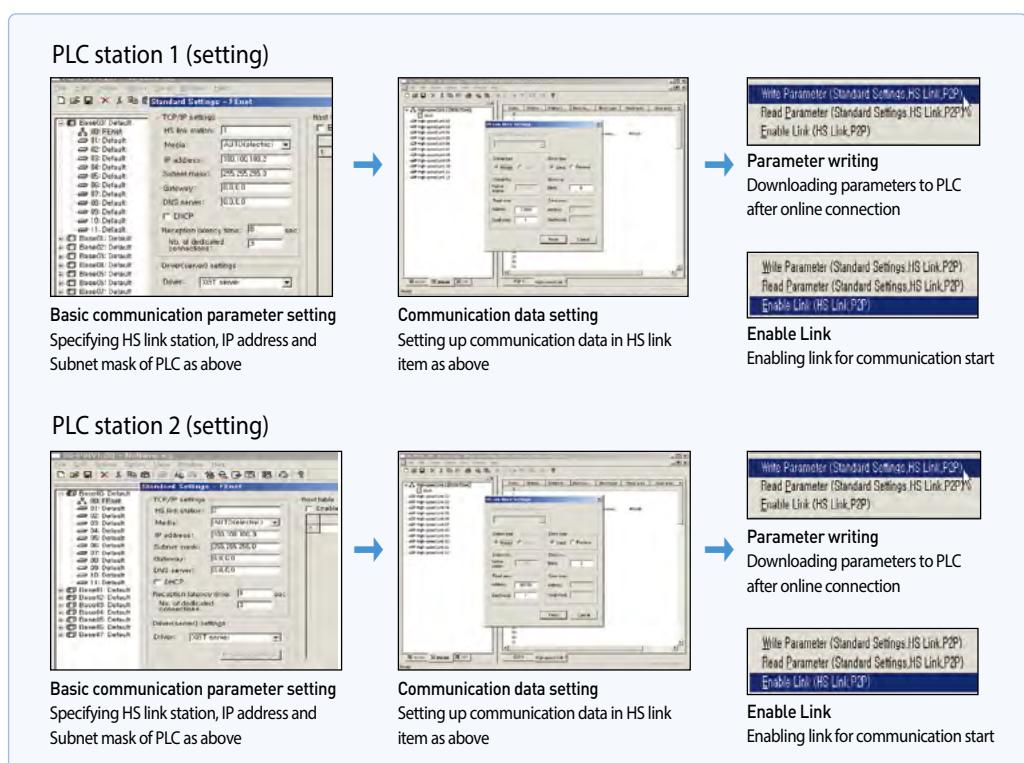


* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

PLC1 setting
Make the up-counter program using CTU command



PLC2 setting
Check out if the counter value of M0100 is transmitted.




Communication example (Rnet)

Remote I/O configuration

LS ELECTRIC developed communication method is Rnet which is a Distributed Control System using Smart I/O. In this case, PLC is the master and the other Smart I/O are slaves.

It just needs basic parameter setting for communication and High-speed link setting.

configuration

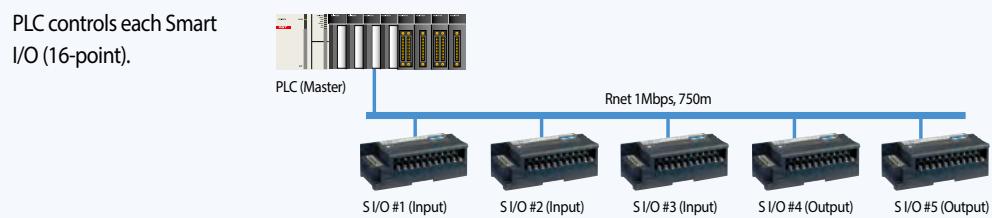


Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
1	P0000	P0010 (P00100~P0010F)	1. XG5000 parameter setting, 2. XG5000 programming
2	P0000	P0011 (P00110~P0011F)	
3	P0000	P0012 (P00120~P0012F)	
4	P0000	P0013 (P00130~P0013F)	
5	P0000	P0014 (P00140~P0014F)	

XG5000 setting

Communication data setting

Setting up type name, station number, address of each station's Smart I/O in HS link item as following example.

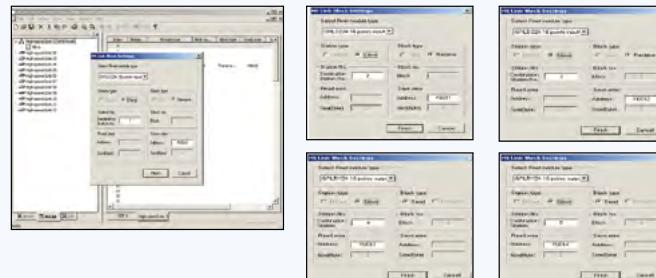

HS link registration completed

Write Parameter (Standard Settings, HS Link,P2P)
Read Parameter (Standard Settings, HS Link,P2P)
Enable Link (HS Link,P2P)

Parameter writing

Downloading parameters to PLC after online connection


Enable Link

Enabling link for communication start

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).


XG5000 programming

Write a program using I/O address of Smart I/O.

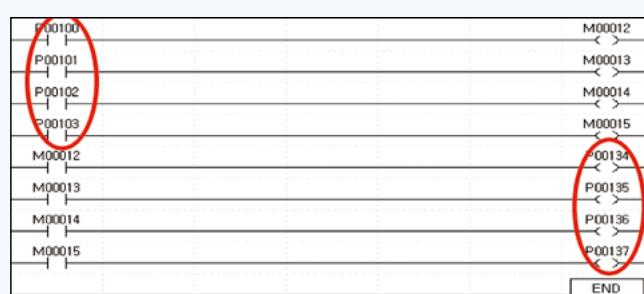

High-speed link communication among PLCs


configuration

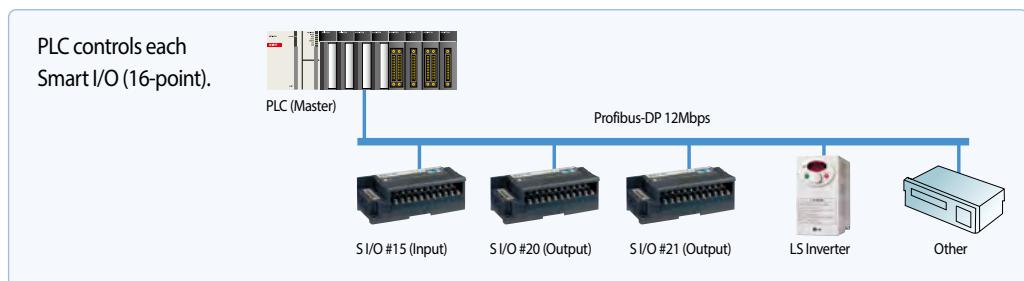

Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
15	P0000	P0010 (P00100~P0010F)	1. SyCon setting 2. XG5000 parameter setting, 3. XG5000 programming
20	P0000	P0011 (P00110~P0011F)	
21	P0000	P0012 (P00120~P0012F)	


XG5000 setting

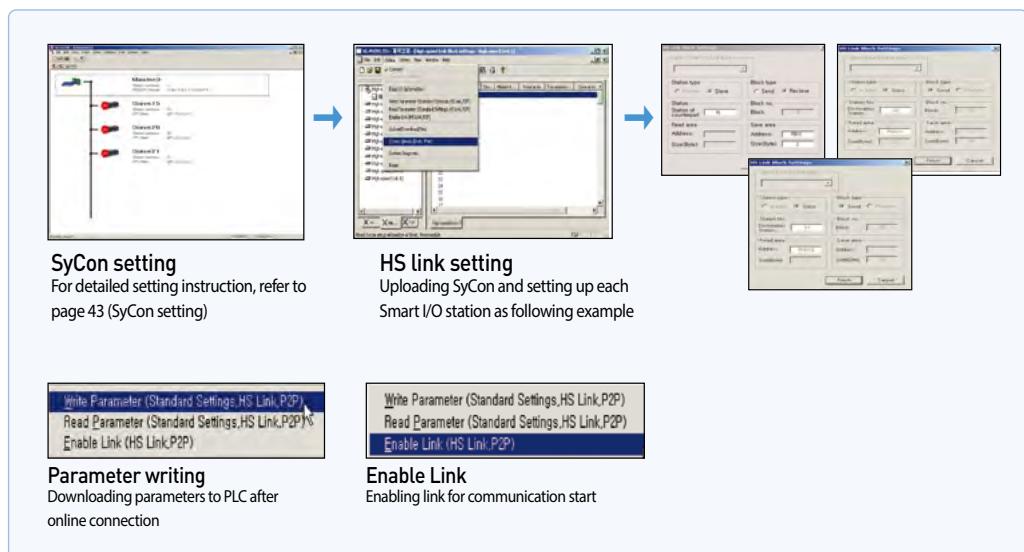

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Write a program using I/O address of Smart I/O Pnet

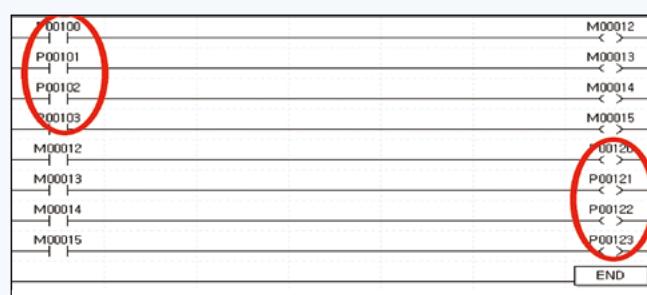


Communication example (DeviceNet)

High-speed link communication among PLCs

XGT can create a Distributed Control System with Smart I/O, Inverter, pneumatic device via Dnet. In this case, PLC is the master and the other devices such as Smart I/O are Slaves.

It just needs SyCon, basic parameter and High-speed link setting.


configuration

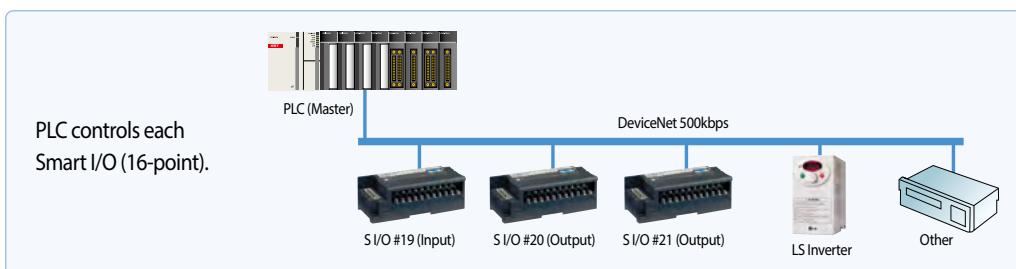

Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
19	P0000	P0010 (P00100~P0010F)	1. SyCon setting
20	P0000	P0011 (P00110~P0011F)	2. XG5000 parameter setting,
21	P0000	P0012 (P00120~P0012F)	3. XG5000 programming


XG5000 setting

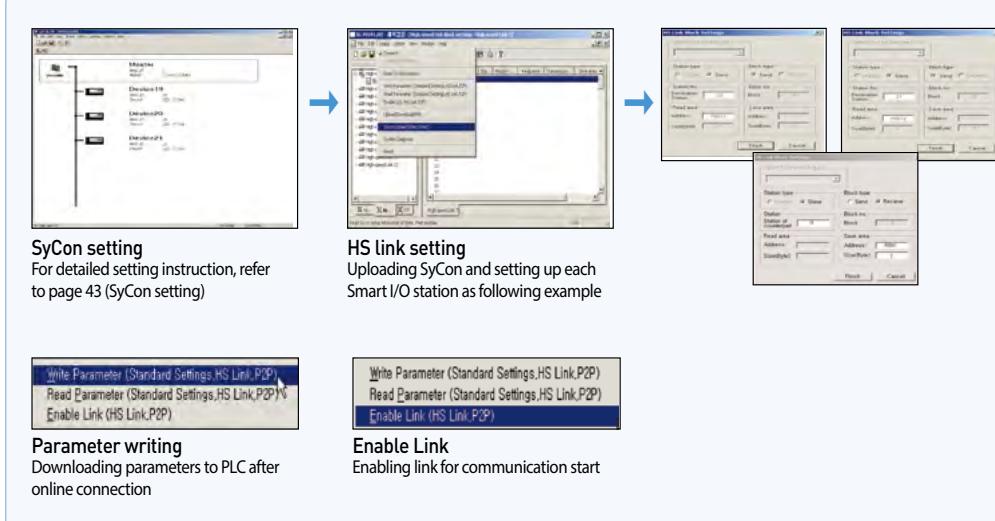

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Write a program using I/O address of Smart I/O Dent.

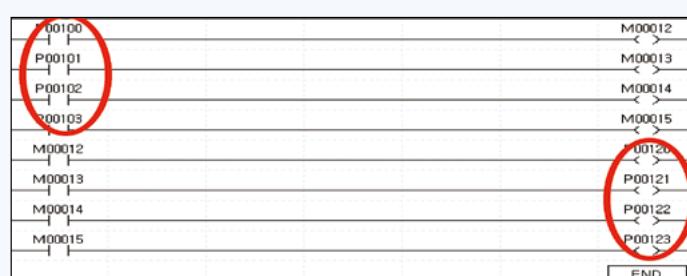

(SyCon setting Profibus, DeviceNet)

86 / 87

SyCon is the dedicated software that help user set up the communication environment for Profibus-DP and DeviceNet more easily and conveniently.

Example of application

New file
Select fieldbus that is used.

Basic communication parameter setting
Select [Master] in Insert menu.

Master module setting
Select [COM-C-DNM] for DeviceNet.
Select [COM-C-DPM] for Profibus-DP.

Bus parameter setting
Set up communication speed of master module.

Master module setting
After clicking the port button, check, the right check-box.

Automatic network scan of connected Smart I/O
Perform automatic network scan after station number setting and wiring with remote device such as Smart I/O.
At this time, all remote devices should be in normal connection (Power-On, etc).
After network scan is completed, press [Automatic Configuration] button and [OK] button.

Network checking
Check normal network (remote) condition.

Parameter download

Disconnect
Disconnect the port in Device Assignment.

Features

- Wiring reduction and real time control of distributed I/O
- Supporting Rnet, DeviceNet, Profibus-DP, Modbus (RS-422/485), RAPIEnet
- Various I/O (DC/TR/Relay) modules with the unit of 16/32 points



Digital I/O specifications

Item	Input		Output		Mixed module	
	DC (Sink/Source)		Transistor (Sink)	Relay	DC (Sink/Source)	Transistor (Sink)
No. of point	16	32	16	32	16	16
Rated input (Load voltage)	DC 24 V		DC 24 V		DC 24 V/AC 110 V/220 V	DC 24 V
Input current (Load current)	7 mA		0.1 A/2 A, 0.5 A/3 A 2 A/5 A		7 mA	0.1 A/2 A, 0.5 A/3 A
Response time	Off. On	3 ms or less	3 ms or less		3 ms or less	3 ms or less
	On. Off	3 ms or less	3 ms or less		3 ms or less	3 ms or less
Common	16 points/COM		16 points/COM		16 points/COM	16 points/COM
Current consumption	200 mA	300 mA	280 mA	380 mA	550 mA	350 mA
Network	Rnet	GRL-D22C	GRL-D24C	GRL-TR2C1	GRL-TR4C1	GRL-DT4C1
	Profibus-DP	GPL-D22C	GPL-D24C	GPL-TR2C/TR2C1	GPL-TR4C/TR4C1	GPL-DT4C/DT4C1
	DeviceNet	GDL-D22C	GDL-D24C	GDL-TR2C/TR2C1	GDL-TR4C/TR4C1	GDL-DT4C/DT4C1
	Modbus	GSL-D22C	GSL-D24C	GSL-TR2C1	GSL-TR4C1	GSL-DT4C1
RAPIEnet	-	GEL-D24C	-	GEL-TR4C1	GEL-RY2C	-

Note1) C Source, Rated current: 0.5A, terminal separated type
C1 Sink, Rated current: 0.5A terminal separated type

Analog I/O specifications

Item	GPL-AV8C/GEL-AV8C	GPL-AC8C/GEL-AC8C	Item	GPL-DV4C/GEL-DV4C	GPL-DC4C/GEL-DC4C
Input channels	8 channels				4 channels
Analog input	DC 1~5 V, 0~5 V, 0~10 V, -10~+10 V	0~20 mA, 4~20 mA, -20~20 mA	Digital input	0~4000, 0~8000, -8000~8000	0~8000
	0~4000, 0~8000, -8000~8000	0~4000, -8000~8000	Analog output	DC 1~5 V, 0~5 V, 0~10 V, -10~+10 V	0~20 mA, 4~20 mA
Digital output				1 KΩ or more (0~5 V or 1~5 V)	500 Η or less
Input impedance	1 MΩ	250Ω	Load impedance	2 KΩ or more (0~10 V or -10~0 V)	2.5 Η or less
	±15 V	±30 mA	Resolution	1.25 mV	2.5 mV
Max. resolution	1.25 mV	2.5 μA	Accuracy	±0.3% (full scale, Ta=0~55°C) ±0.4% (full scale, Ta=0~55°C)	±0.3% (full scale, Ta=0~55°C) ±0.4% (full scale, Ta=0~55°C)
	±0.3% (full scale, Ta=0~55°C)	±0.3% (full scale, Ta=23°C±5°C)	Conversion speed	10 ms or less/8 channel	10 ms or less/4 channel
Accuracy	±0.3% (full scale, Ta=0~55°C)	±0.4% (full scale, Ta=0~55°C)	Response period	10 ms or less/8 channels + Transmission period (ms)	Analog input/output terminal with FG→Insulation
	10 ms or less/8 channels + Transmission period (ms)	Analog input/output terminal with FG→Insulation	Insulation method	Analog input/output terminal with Communication terminal→Insulation	Analog input/output terminal with each channel→No insulation
Conversion speed	10 ms or less/8 channel	10 ms or less/4 channel	External power supply	DC 24 V (20.4 ~ 28.8)	External power supply
Response period	10 ms or less/8 channels + Transmission period (ms)	Analog input/output terminal with FG→Insulation	External current consumption	210 mA	240 mA
	Analog input/output terminal with FG→Insulation	Analog input/output terminal with each channel→No insulation	Weight (kg)	0.314	0.322

Communication specifications

Item	Rnet (LS dedicated network)	Profibus-DP	DeviceNet	MODBUS	RAPIEnet(RJ-45)
Protocol	LS ELECTRIC dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)	Fast Ethernet
Transmission speed	1 Mbps	9.6 Kbps ~ 12 Mbps	125/250/500 Kbps	2.4 Kbps ~ 38.4 Kbps	100Mbps
Transmission distance	750 m/segment	100 m ~ 1.2 km	500/250/125 m (Thin cable: 100 m)	500 m	100M
Topology	Bus Token	Bus	Trunk & Drop	Bus	CRC32
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, Bit Strobe)	Master/Slave (Poll)	CSMA/CD
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32	64

(Modbus TCP/IP, Ether Net/IP Adapter)

88 / 89

Features

- IEEE 802.3 standard
- Modbus TCP/IP, EtherNet/IP
- 10/100BASE-TX media
- Ethernet Twisted pair 2ports (RJ-45)
- 2channels Ethernet MAC
- Auto-Negotiation/Auto-Crossover
- Various system configuration



Specification


Items	XEL-BSSA	XEL-BSSB
Protocol	Modbus TCP	EtherNet/ IP
Transmission speed	10 / 100Mbps	
Connector	RJ-45(2ports)	
Topology	Software(BootpServer)	
IP setup	Bus, Star	
Max. expansion module	8ea	
Max. digital I/O point	256 points	
Max. analog I/O channel	32ch (Input 16ch, Output 16ch)	
Operating power	Rated voltage Range Rated current Insulation	DC 24V DC19.2 ~ 28.8V 1.5A Non-Insulation, Comm. Part insulation

System configuration

Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	Max. 256 points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	Max. 256 points
XBE-DN16A	DC24V input 8pt, Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	
XBF-AD04C	4-channel analog input (current/voltage, resolution: 1/16000)	
XBF-DC04A	Current output 4Ch	Input Max. 16ch Output Max. 16ch
XBF-DV04C	4-channel analog input (voltage, resolution: 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution: 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

Externals and inscriptions

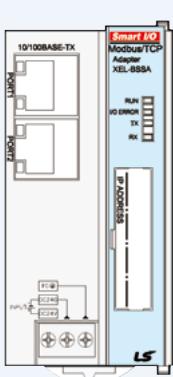

Item	LED status
RUN	Operation status
	On: Normal operation
	Off: Abnormal operation
I/O ERROR	Interface status of expansion module
	On: Expansion module error
	Off: Normal operation
TX	Data send status to master
	On: Under transmission
	Off: No data
RX	Data receive status from master
	On: Under receiving
	Off: No data

Dimension

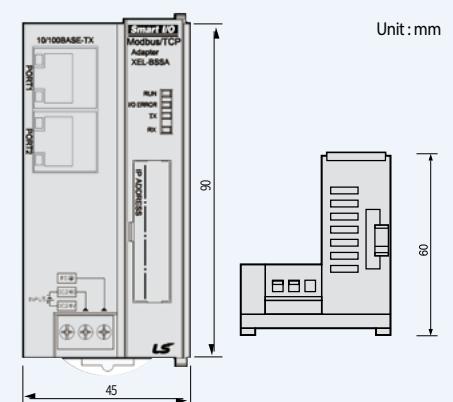

Features

- Max. 63 stations
- Flexible connection via DeviceNet
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output



Specification

Items		Description		
Communication Specification		Poll, Bit-strobe, COS/Cyclic		
		Group 2 only slave		
		Auto baud rate		
Module's Type		Slave		
Max. Node Number (MAC ID)		64(0~63)		
Number of Expansion I/O Slots		8		
Max. DC I/O Data Size		Input:32bytes / Output:32bytes		
Max. Analog Channels		Input : 16Channels / Output : 16Channels		
Speed & Distance	Comm. Speed	125 kbps	250 kbps	500 kbps
	Distance	500 m	250 m	100 m
Input Power		System Power DC 24V		
Input Power	Range	19.2V ~ 28.8V(11V operate)		
	Output Voltage/ Current	5V(20%) / 1.5A		
Weight(g)		100		


* When I/O module is installed, check the current consumption
(Max. Current: 1.5A)

System configuration

Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	Max. 256 points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	
XBE-DN16A	DC24V input 8pt , Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	16channels
XBF-AD04C	4-channel analog input (current/voltage, resolution: 1/16000)	
XBF-DO4A	Current output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution: 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution: 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

Externals and inscriptions

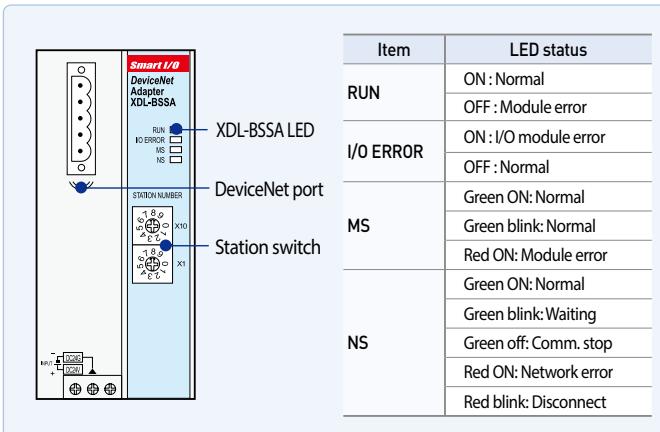

Item	LED status
RUN	ON: Normal
	OFF: Module error
I/O ERROR	ON: I/O module error
	OFF: Normal
MS	Green ON: Normal
	Red ON: Module error
NS	Green ON: Normal
	Green blink: Waiting
	Green off: Comm. stop
	Red ON: Network error
	Red blink: Disconnect

Dimension

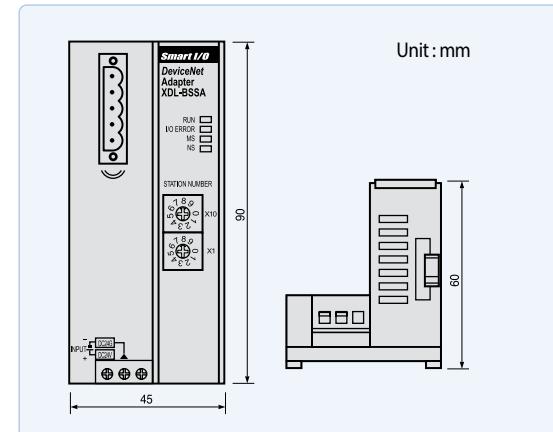

SMART I/O (Profibus-DP adapter)

90 / 91

Features

- Max. 100 stations (32stations per segment)
- Flexible connection via Profibus
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output




Specification

Item		Performance Specification				
Transmission	Standard	EN50170 / DIN 19245				
	Interface	RS-485(Electric)				
	Media Access	Polling				
	Topology	BUS				
	Encoding Method	NRZ				
	Interface	Sync mode , Freeze mode Auto baud rate				
	Master/Slave	Slave				
	Cable Type	Twisted Pair Shielded Cable				
	Kbps	9.6	19.2	93.75	187.5	500
	Comm. Distance	m	1200	1200	1200	1000
	kbps	1500	3000	6000	12000	-
	m	200	100	100	100	-
	Max. Node Number	100 (0 ~ 99)				
	Number of Expansion I/O Slots	8				
	I/O Data Size	64bytes (Input:32bytes/Output:32bytes)				
	Number of Analog Channels	32Channels (Input : 16Channels/Output : 16Channels)				
	Input Power	Supply Voltage : DC 24Vdc 19.2 ~ 28.8Vdc				
	Output Voltage/ Current	5V(20%) / 1.5A				
	Weight(g)	100				


* When I/O module is installed, check the current consumption
(Max. Current: 1.5A)

Externals and inscriptions

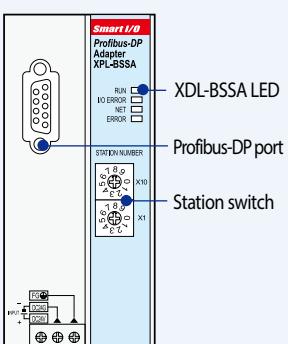

Item	LED status
RUN	ON : Normal
	Blink: Waiting or comm.error
	OFF : Module error
I/O ERROR	ON : I/O module error
	OFF : Normal
NET	ON : Data send/receive
	OFF : Disconnection
NS	ON : Comm. error
	OFF : Normal

Dimension

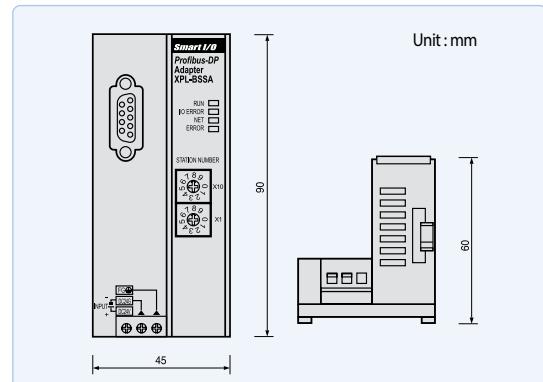

Features

- Max. 63 stations
- LS dedicated protocol (Rnet)
- Utilize same I/O modules with XGB
- Max. 512 I/O points
- Max. 32 channels analog input/output



Specification

Item		Performance Specification
Transmission	Tran. Rate	1Mbps
	Transmission Path	Bus type
	Method	750m
	Max. Cable Length	5 pin connector
	Connector type	Twisted Pair Shielded Cable
	Cable type	32(non-used repeater),
	No. of Station	64(used repeater)
	(Included Master)	512(Input : 256, Output: 256)
	Max. Digital I/O points	96
	Max. Analog I/O points	Digital I/O 8
Number of I/O Slots		Analog I/O 4
Selection of Latch/Clear		handling of mode change switch
Rated Voltage/current		DC24V/0.55A
Weight (g)		100


* When I/O module is installed, check the current consumption
(Max. Current: 1.5A)

System configuration

Items		Description	Max. I/O point
Digital I/O	XBE-DC08A	DC24V input 8pt	256points
	XBE-DC16A	DC24V input 16pt	
	XBE-DC32A	DC24V input 32pt	
	XBE-RY08A	Relay output 8pt	
	XBE-RY16A	Relay output 16pt	
	XBE-TN08A	Tr output 8pt, Sink	
	XBE-TP08A	Tr output 8pt, Source	
	XBE-TN16A	Tr output 16pt, Sink	
	XBE-TP16A	Tr output 16pt, Source	
	XBE-TN32A	Tr output 32pt, Sink	
Analog, Temperature	XBE-TP32A	Tr output 32pt, Source	16channels
	XBE-DN16A	DC24V input 8pt , Tr output 8pt	
	XBF-AD04A	Current/Voltage input 4Ch	
	XBF-AD04C	4-channel analog input (current/voltage, resolution: 1/1600)	
	XBF-DO4A	Current output 4Ch	
	XBF-DV04C	4-channel analog input (voltage, resolution: 1/16000)	
	XBF-DV04A	Voltage output 4Ch	
	XBF-DV04C	4-channel analog input (voltage, resolution: 1/16000)	
RTD input 4Ch			
TC input 4Ch			


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points.

Externals and inscriptions

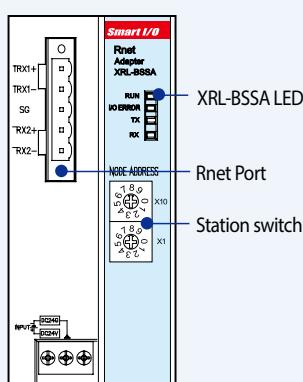

Item	LED status
RUN	ON : Normal OFF : Module error
I/O ERROR	ON : I/O module error OFF : Normal
TX	Data send
RX	Data receive


Dimension

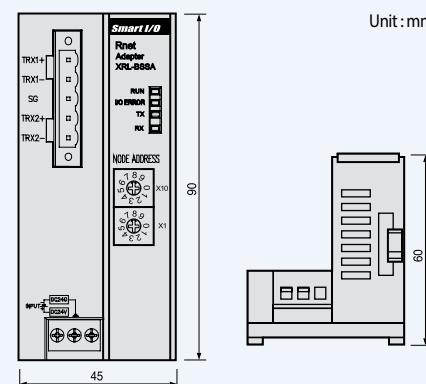


SMART I/O (Features)

Programmable Logic Controller 92 / 93


Smart I/O Rnet system

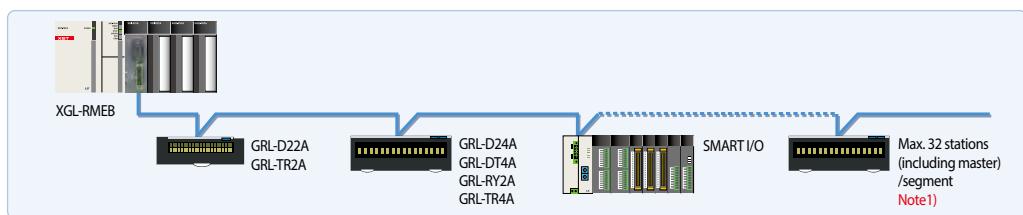


Smart I/O Modbus system

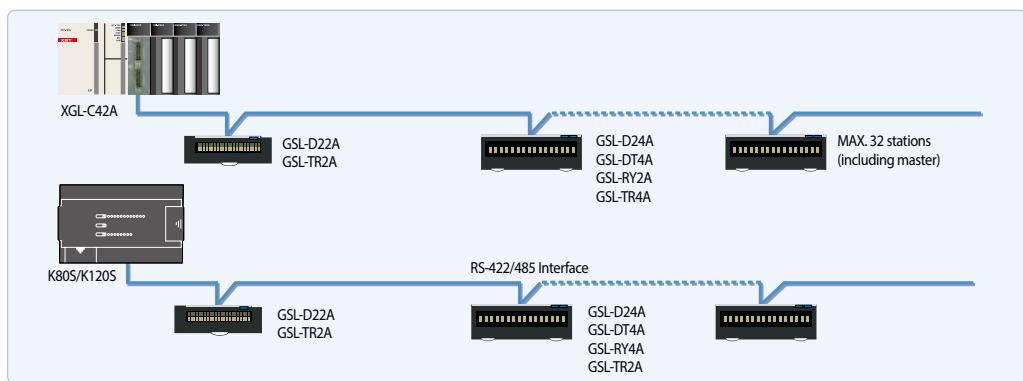

Smart I/O Profibus-DP system

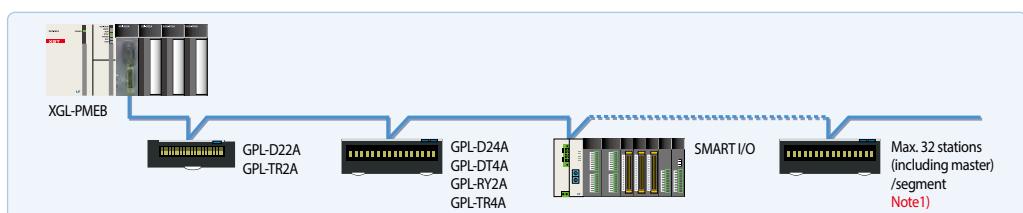


Smart I/O DeviceNet system

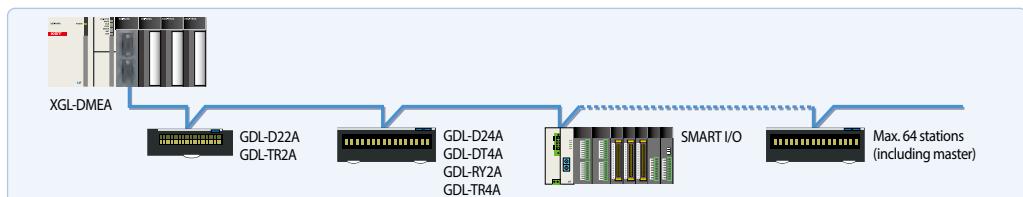

Note1) Segment: Communication section that does not use repeater or second master.


Dimensions

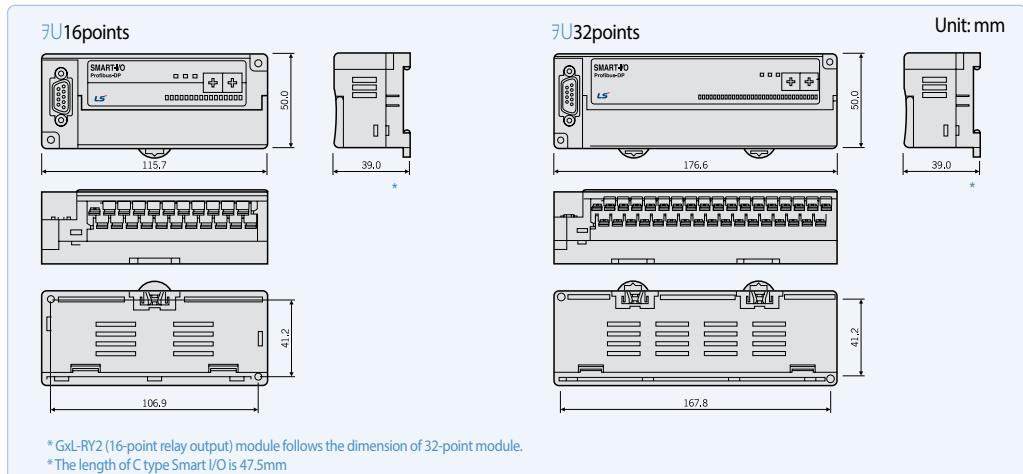

Network Standard

Item	Rnet (LS dedicated network)	Profibus-DP	DeviceNet	MODBUS	RAPInet(RJ-45)
Protocol	LS ELECTRIC dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)	Fast Ethernet
Transmission speed	1 Mbps	9.6 Kbps ~ 12 Mbps	125/250/500 Kbps	2.4 Kbps ~ 38.4 Kbps	100Mbps
Transmission distance	750 m/segment	100 m ~ 1.2 km	500/250/125 m (Thin cable: 100 m)	500 m	100M
Topology	Bus Token	Bus	Trunk & Drop	Bus	CRC32
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, Bit Strobe)	Token Pass & Master/Slave (Poll)	CSMA/CD
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32	64





Special

XGT series offer diverse special modules such as analog, HSC, and positioning to satisfy complicated industrial needs

Contents

- 96 XGT speial module
- 98 Analog input module
- 100 2Wire Analog input module
- 101 Analog input module [Isolated]
- 102 Analog input module [Example]
- 103 Analog output module
- 104 Analog output module [Example]
- 105 Analog input/output module
- 106 HART interface
 - analogue/digital conversion module
- 107 High-speed counter module
- 110 8-Channel high peed counter module
- 111 High-speed counter module [Example]
- 114 Positioning module (XPM)
- 116 Positioning module (Network Type)
- 118 XG5000
- 120 Motion Module [EtherCAT]
- 121 RTD input module
- 122 Thermocouple module
- 123 Temperature controller
- 124 Event input module
- 126 Datalog module



Revolution of easy to use ... XGT Special module

Fast processing of parameter and data of special module

- Continually refreshing operation data of special module by CPU module
- Including contact points such as conversion data of AD/DA module and command of HSC & positioning module

Easy- to-use(Easy operation parameter setting and data monitoring)

- Convenient parameter setting available through XG5000
- Providing useful functions that can monitor and test operation data and contact points through XG5000

Simple maintenance (Changing online module)

- Without turning off and holding CPU, users can change special module with ease.

The diagram illustrates the evolution of the XGT special module. On the left, under the heading 'Before', there is a screenshot of a complex, multi-panel configuration interface for a special module. This interface includes various tables, dropdown menus, and status indicators. An arrow points to the right, leading to the 'After' state. In the 'After' state, there is a screenshot of a simplified configuration interface for the XG5000. This interface shows a single table with columns for address, name, type, and value, making the setup process easier. Below this, under the heading 'Example of programming', there are three screenshots of the XG5000 software's graphical programming environment. These screens show ladder logic, function block diagrams, and a detailed parameter configuration window. Finally, under the heading 'Monitoring of special module', there is a screenshot of a monitoring interface. This interface displays real-time data for various modules, including analog inputs and digital contacts, providing a comprehensive overview of the system's performance.

Analog input/output module



Analog input module

XGF-AV8A	8 channels, voltage
XGF-AC8A	8 channels, current
XGF-AD8A	8 channels, voltage/current
XGF-AD4S	4 channels, voltage/current
XGF-AD16A	16 channels, voltage/current
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)



Analog output module

XGF-DV4A	4 channels, voltage
XGF-DC4A	4 channels, current
XGF-DV8A	8 channels, voltage
XGF-DC8A	8 channels, current
XGF-DV4S	4 channels, voltage, Isolated
XGF-DC4S	4 channels, current, Isolated
XGF-DA4S	4 channels, voltage/current, Isolated

Analog input/output module

XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
----------	--

Temperature module



Temperature input module

XGF-TC4S	4 channels, thermocouple input, Isolated
XGF-RD4A	4 channels, RTD input
XGF-RD4S	4 channels, RTD input, Isolated



Temperature controller

XGF-RD8A	8 channels input: RTD
XGF-TC4UD	4 channels input: voltage/current/TC/RTD 8 channels output: current/TR
XGF-TC4RT	4 channels input: RTD 4 channels output: TR Control: 4loop

Positioning module/Motion controller



Positioning module

XGF-PO1A~PO3A	Open collector, 1~3axis
XGF-PD1A~PD3A	Line drive, 1~3axis
XGF-PO1H~PO4H	Open collector, 1~4axis
XGF-PD1H~PD4H	Line drive, 1~4axis

Motion module



Motion module

XGF-M32E	Standard EtherCAT Net, 32 axes
----------	--------------------------------

High speed counter module



High-speed counter module

XGF-HO2A	2 channels, Open collector
XGF-HD2A	2 channels, Line driver
XGF-H08A	8-channels high speed counter module, 8Ch

Event input module



High-speed counter module

XGF-SOE4	DC24V, 32points
----------	-----------------

SPECIAL

Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format




Specifications

Item	XGF-AV8A (Voltage input)	XGF-AC8A (Current input)			XGF-AD4S (Voltage/Current input)								
No. of input channel	8 channels			4 channels									
Analog input	DC 1~5V, 0~5V, 0~10V, -10~10V			DC 1~5V, 0~5V, 0~10V, -10~10V									
Selection of input range in program or S/W package (Available to be set per channel)													
Digital output	XGF-AV8A	Analog input	1~5V	0~5V	0~10V	-10~10V							
		Unsigned value			0~16,000								
		Digital output			-8000~8,000								
		Signed value											
		Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000							
XGF-AC8A	XGF-AC8A	Analog input	4~20mA			0~20mA							
		Unsigned value			0~16,000								
		Digital output			-8,000~8,000								
		Signed value		4,000~20,000		0~20,000							
		Precise value			0~10,000								
XGF-AD4S	XGF-AD4S	Analog input	1~5V	0~5V	0~10V	-10~10V	4~20mA 0~20mA						
		Unsigned value			32,000~32,000								
		Digital output	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000 0~20,000						
		Signed value											
		Precise value											
Resolution		1/16,000			1/64,000								
		1~5V	0.250mV	4~20mA	1.0µA	1 ~ 5V	62.5µV	4~20mA	250nA				
		0~5V	0.3125mV			0~5V	78.1µV						
		0~10V	0.625mV	0~20mA	1.25µA	0 ~ 10V	156.3µV	0~20mA	312.5nA				
		-10V~10V	1.250mV			±10V	312.5µV						
Accuracy					±0.2% or less (Ambient temperature 25°C) ±0.3% or less (Range of operation temperature)								
					±0.05% or less (Ambient temperature 25°C) Temp. coefficient ±16.7ppm/°C (Range of operation temperature)								
Conversion speed		250µs /channel											
Max. absolute input		15V	±30mA	Voltage: ±15V, Current: ±30mA									
Insulation method		Photo-coupler Insulation between input terminal and power supply											
Connection terminal		No insulation between channels						Insulation between channels					
No. of occupied		Fixed type (Setting in basic parameter): 64 points											
I/O points		Variable type (Dissolving in basic parameter): 16 points											
Current consumption		420mA			610mA								
Weight (Kg)		0.14											

Configuration

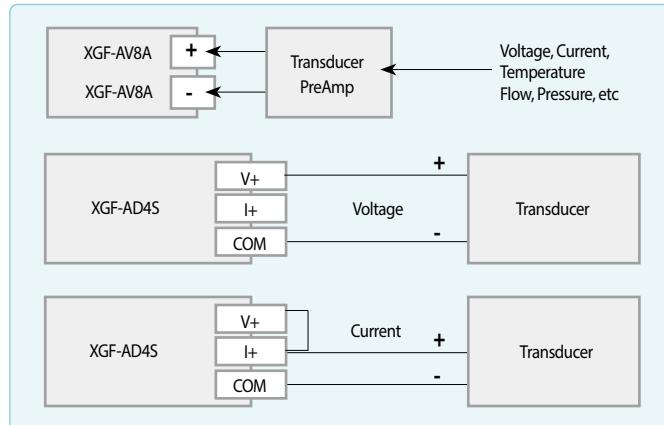

A/D conversion characteristics

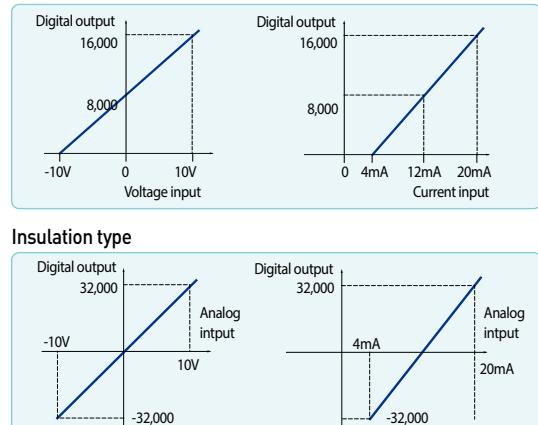

Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format




Specifications

Item	XGF-AD16A			XGF-AD8A		
No. of input channel	16 channels			8 channels		
Analog input	Voltage input	DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ)				
	Current input	DC4~20mA, DC 0~20mA (Input resistance: 250Ω)				
	Input selection	Dip switch				
	Range selection	Selection of input range in the program or S/W package (Available to set per each channel)				
Digital output	Input type	Voltage input			Current input	
		DC 1~5V	DC 0~5V	DC 0~10V	DC -10~10V	DC 4~20mA
	Unsigned value	0~16,000				
	Signed value	-8,000~8,000				
Digital output	Precise value	0~10,000				
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
	Resolution[1/16000]	0.2500mV	0.3215mV	0.6250mV	1.250mV	1.00μA
	Range selection	Selection of input type by program or parameter (Available to be set per each channel)				
Resolution		±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)				
Max. absolute input		±15V			±30mA	
Conversion speed		500μs /channels			250μs /channels	
Insulation method		Photo-coupler insulation between terminal and power supply				
Terminal		32 points 1			8 points	
No. of occupied I/O points (XGK)		Fixed type (Setting in basic parameter): 64 points Variable type (Dissolving in basic parameter): 16 points				
Current consumption		DC 5V: 420mA				
Wight		140g				

Configuration

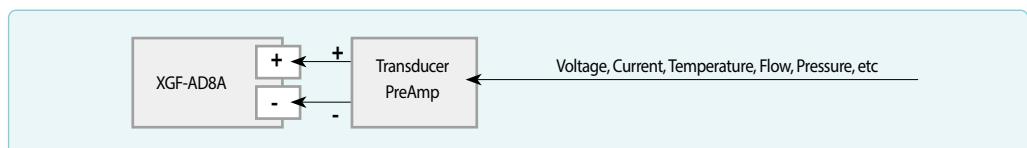

A/D conversion characteristics

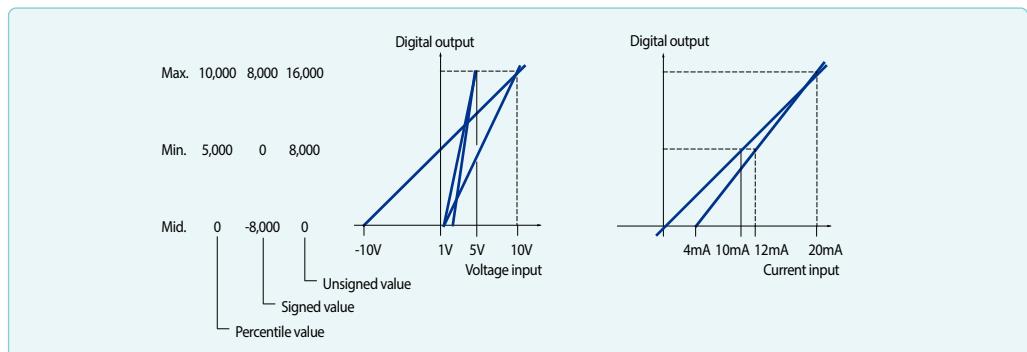

2Wire Analog input module

Features


- 2Wire sensor (transmitter) input
- 1/64000 resolution
- Channel insulation
- Various additional functions




Specifications

Item		XGF-AW4S			
No. of input channel		4channels			
Voltage input		DC 1~5V(Input resistance: 11MΩ)		DC 4~20mA(Input resistance : 250Ω)	
Digital output	Signed value	-32,000~32,000 -		32,000~32,000	
	Precise value	1,000~5,000		4,000~20,000	
	Percentile value	0~10,000		0~10,000	
	Resolution[1/64000]	0.25mV		1uA	
	Range selection	Selection of input range in program or S/W package (Available to be set per channel)			
Resolution		±0.05% or less (Ambient temperature 25°C), Temp. coefficient ±70ppm/°C(Range of operation temperature)			
Max. absolute input		±6V	±30mA		
Conversion speed		10ms/4channels			
Insulation	Item	Method	Withstand voltage	Resistance	
	Channel	Transformer	500VAC, 50/60Hz, 1min,	500VDC,10MΩ or more	
	Terminal - Power	Photo-coupler	Leakage current: 10mA or less		
Transmitter	Voltage	DC 24V ±15%			
	Max. current	30mA			
	Short circuit protection	Limit current: 25 ~35mA			
External power		DC 24V +20%, -15%			
Terminal		18 point terminal			
No. of occupied I/O points (XGK)		Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points			
Current	DC 5V	180mA			
consumption	DC 24V	480mA			
Wight		140			

Configuration

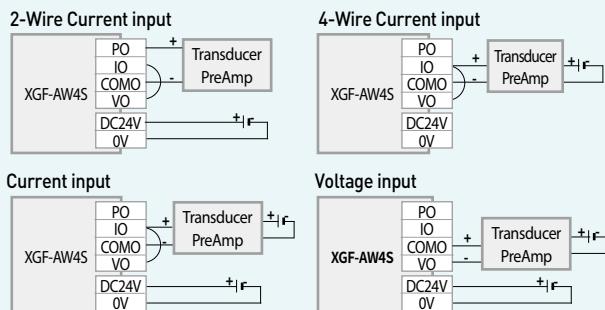

A/D conversion characteristics

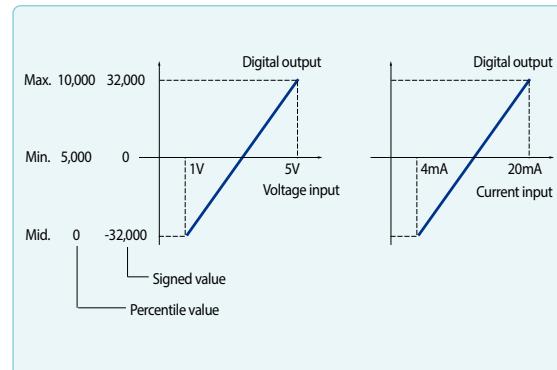

Analog input module(Isolated)

100 / 101

Features

- Channel isolation
- 1/64000 resolution
- ±0.05%(25°C) fixed density
- Setting and monitoring the special module parameter through XG5000




Specifications

Item		XGF-AD4S									
No. of input channel		4 channel									
Analog input	Voltage input	DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ)				-					
	Current input	DC 4~20, DC 0~20 (Input resistance: 250Ω)				-					
	Input selection	Dip switch				-					
	Range selection	Selection input range in the program or S/W package(Available to set per each channel)									
	Input type	Voltage input				Current input					
Digital output	DC 1~5V	DC 0~5V	DC 0~10V	DC -10~10V	DC 4~20mA	DC 0~20mA					
	Signed value	32,000~32,000									
	Precise value	0~10,000									
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000	0~20,000				
	Resolution[1/64,000]	0.0625mV	0.0781mV	0.1563mV	0.3125mV	0.25μA	0.3125μA				
Range selection		Selection input range in the program or S/W package(Available to set per each channel)									
Resolution		±0.2% or less(Ambient temperature 25°C), ±0.3% or less(Range of operation temperature)									
Max. absolute input		±15V				±30mA					
Conversion speed		10ms/4 channel									
Isolation Standards	Item	Isolation Method		Isolation withstand voltage		Isolation resistance					
	Channels	Transformer isolation		500VAC, 50/60Hz		10MΩ or more					
	Input-PLC Power	Photo-coupler isolation									
Terminal		18 points									
No. of occupied I/O points (XGK)		Fixed type(Setting in basic parameter):64points, Variable type(Dissolving in basic parameter): 16points									
Current consumption		DC 5V: 610mA									
Wight		140									


Analog input module (Example)

System Configuration

This is a simple example to start Analog input module setting. For more details, refer to user's manual.

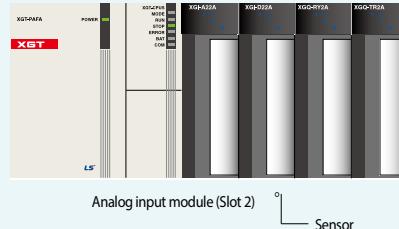

Wiring

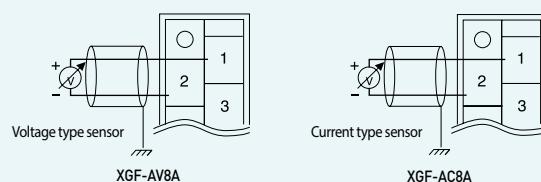

Parameter setting

In the parameter setting box, select slot and analog module that you want to use.
(This example shows to select '0' channel of voltage input type.)

The screenshot shows the 'I/O Parameter Setting - Fixed allocation(64points)' window. On the left, the 'Module list' tree view shows 'Base 00: Default' selected. In the main area, 'Slot 2' is selected, and under 'Module', the 'Digital Module List' is expanded to show 'Analog Input Module'. Under this, 'XGF-AV8A (Voltage, 8-CH)' is selected. An arrow points from this selection to a detailed configuration dialog box on the right.

Parameter	CH 0
Channels	Disable
Input Range	1~5V
Output Type	0~16000
Filter Process	Disable
Filter Constants	1
Average Process	Disable
Average Method	Count-Avr
Average Value	2

You need to fill out each item suitable for your system.

Press the <Details> button at lower end of parameter setting box after selecting the module.

Programming

Create a program for A/D conversion
(0~10V to 0~16,000).

Special devices for programming

Refer to user's manual for more details.

U02.00: Error

U02.11: Requesting error-clear


U02.02: Memory of channel A/D value

Uxy.aa.bb

x: Base number

y: Slot number

aa.bb: Refer to user's manual.

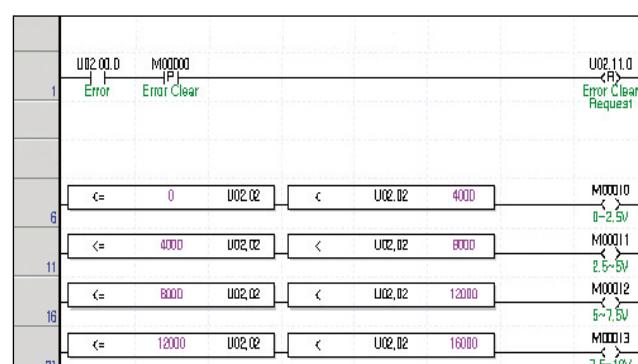

Analog output module

Programmable Logic Controller 102 / 103

Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital input data format




Specifications

Item	XGF-DV4A, XGF-DV8A, XGF-DV4S (Voltage output type)		XGF-DC4A, XGF-DC8A, XGF-DC4S [Current output type]		XGF-DA4S (Voltage/Current output type)					
No. of input channel	XGF-DV4A/4S, XGF-DC4A/4S, XGF-DA4S : 4 channels / XGF-DV8A, XGF-DC8A : 8 channels									
Analog output range	DC 1~5V, 0~5V		DC 4~20mA		DC 0~20mA					
Selection of input range in the program or S/W package (Available to set per each channel)										
Digital input range	Analog output	Voltage type	1~5V	0~5V	0~10V	-10~10V				
		Unsigned value		0~16,000						
		Signed value		-8000~8,000						
		Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000				
		Percentile value		0~10,000						
	Analog output	Current type		4~20mA		0~20mA				
		Unsigned value		0~16,000						
		Signed value		-8,000~8,000						
		Precise value	4,000~20,000		0~20,000					
		Percentile value		0~10,000						
16-bit binary value: selection of input type by program or parameter (Available to be set per each channel)										
Max. resolution	1~5V		0.250mV		1/16,000 (Per each input range)					
	0~5V		0.3125mV		4~20mA					
	0~10V		0.625mV		0~20mA					
	$\pm 10V$		1.250mV		1.0 μ A					
Accuracy	XGF-DV4A/8A, DC4A/8A: $\pm 0.2\%$ or less (Ambient temperature 25°C), $\pm 0.3\%$ or less (Range of operation temperature) XGF-DV4S/DC4S/DA4S: $\pm 0.1\%$ or less (Ambient temperature 25°C), temp coefficient: $\pm 80ppm/^{\circ}C$									
Conversion speed	250 μ s/channel									
Max. absolute output	$\pm 15V$		$\pm 24mA$							
Insulation method	Photo-coupler insulation between terminal and power supply XGF-DV4A/8A, XGF-DC4A/8A: No insulation between channels XGF-DV4S, XGF-DC4S, XGF-DA4S (Insulation type): Insulation between channels									
Connection terminal	18 point terminal									
No. of occupied points	Fixed type (Setting in basic parameter): assign 64 points Variable type (Dissolving in basic parameter): assign 16 points									
Current consumption (mA)	DV4A	DV8A	DV4S	DC4A	DC8A	DC4S				
	Internal	190	190	200	190	200				
Weight (Kg)	100									
	External									
	140									
	180									
	150									
	210									
	300									
	220									
	150									


Output wiring

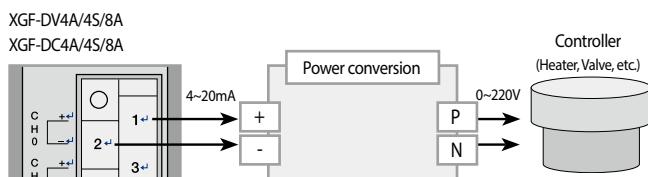

I/O conversion characteristics

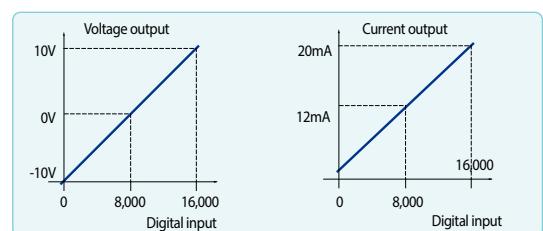


Insulation type

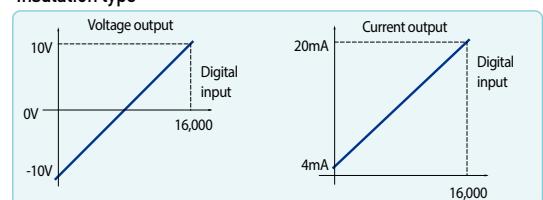


Analog output module (Example)

System Configuration

This is a simple example to start Analog output module setting. For more details, refer to user's manual.

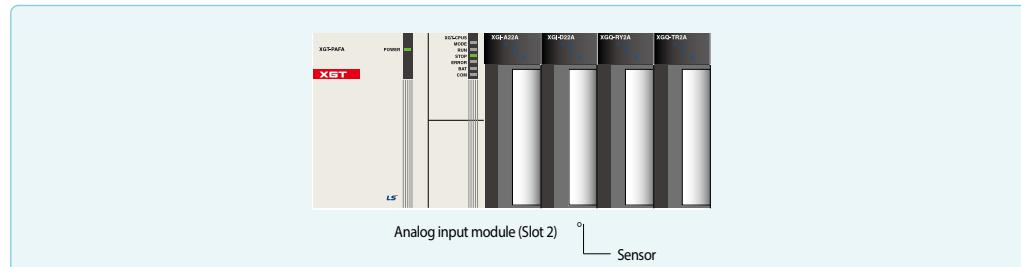

Wiring

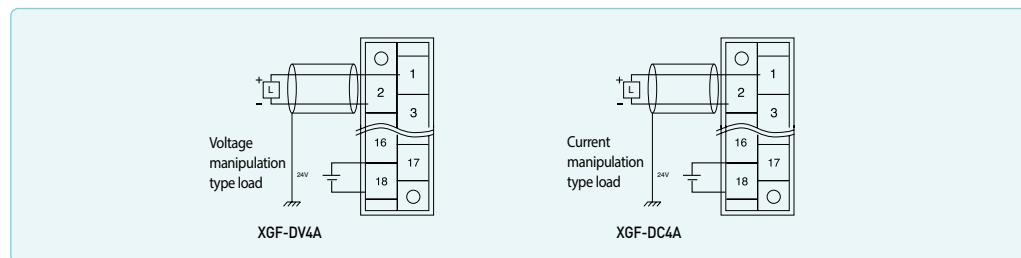

Parameter setting

In the parameter setting box, select slot and analog module that you want to use.
(This example shows to select '0'channel of voltage output type.)

I/O Parameter Setting - Fixed allocation(64points)

Slot	Module
0	
1	
2	
3	Digital Module List
4	Special Module List
5	Analog Input Module
6	Analog Output Module
7	XGF-DV4A (Voltage, 4-CH)
8	XGF-DV8A (Voltage, 8-CH)
9	XGF-DC4A (Current, 4-CH)
10	XGF-DC8A (Current, 8-CH)
11	HSC Module
12	Positioning Module

XGF-DV4A (Voltage, 4-CH)

Parameter	CH 0
Enable	<input checked="" type="checkbox"/>
0~10V	<input type="checkbox"/>
0~16000	<input type="checkbox"/>
Min	<input type="checkbox"/>

You need to fill out each item suitable for your system.

Press the <Details> button at lower end of parameter setting box after selecting the module.


Programming

Create a program for D/A conversion
(~ 16000 to $0\sim 10V$).

Special devices for programming

Refer to user's manual for more details.
U02.02.0: Admitting Channel 0 output
U02.03: Output data of channel 0

Uxy.aa.bb
x: Base number
y: Slot number
aa,bb: Refer to user's manual.

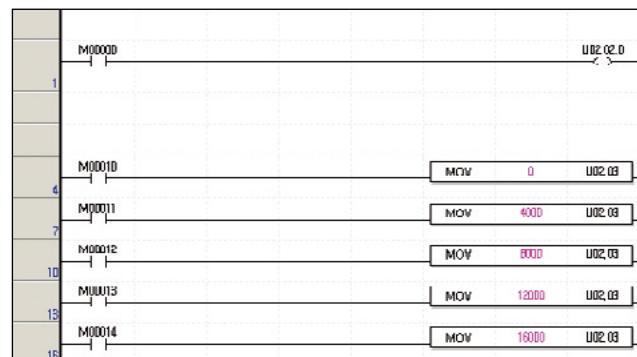

Analog input/output module

104 / 105

Features


- Input 4channels Output 2channels
- 4channels, 1/8000 resolution
- Parameter setting and monitoring by XG5000



Specifications

Item		XGF-AH6A					
Input	No. of input channel	4channels					
	Analog output	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	
		Resistance			1MΩ	250Ω	
		Selection	V+ and COM				
	Digital output	Unsigned value	0~8,000				
		Signed value	-4,000~4,000				
Output	Digital output	Precise value	0~10,000				
		Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
		Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
		Range selection	Selection of input range in program or S/W package (Available to be set per channel)				
		Resolution	±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)				
		Max. absolute input	±15V				
Conversion speed		500ms /channels					
Input	No. of input channel	2channels					
	Analog output	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	
		Resistance	1kΩ or more				
		Selection	V+ and COM				
	Digital output	Unsigned value	0~8,000				
		Signed value	-4,000~4,000				
Output	Digital output	Precise value	0~10,000				
		Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
		Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
		Range selection	Selection of input range in program or S/W package (Available to be set per channel)				
		Resolution	±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)				
		Max. absolute input	±15V				
Conversion speed		500us/channels					
Insulation method		Photo-coupler insulation between terminal and power supply					
Terminal		18 point terminal					
No. of occupied I/O points (XGK)		Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points					
Current consumption (DC5V)		770mA					
Wight		140					

Wiring

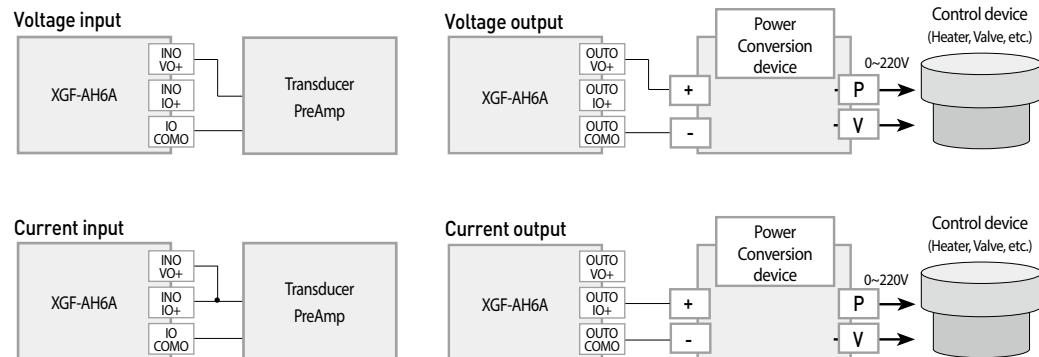

Features

- It supports HART protocol
In the input range of 4 ~ 20mA, bi-directional digital communication is available by using analog signal wiring. If analog wiring is currently used, there is no need to add wiring for HART communication (HART communication is not supported in the range of 0 ~ 20mA)
- High accuracy
- Operation parameters setting/monitoring
- Input disconnection detection function



Specifications

Item		XGF-AC4H		XGF-DC4H			
No. of Channels		4channels			4channels		
Analog input/output range		DC4~20mA,DC 0~20mA, (Input Resistance 250Ω)			DC 4~20mA,DC 0~20mA, (Load resistance 600Ωor less)		
Digital input/ output	Analog output/Digital input	DC4~20mA	DC0~20mA	DC4~20mA	DC0~20mA		
	Signed value	-32000~32000		-8000~8000			
	Unsigned value	-		0~1600			
	Precise value	4000~2000	0~2000	4000~2000	0~2000		
	Percentile value	0~10000					
Max. resolution		0 / 64000					
		4~20mA:250.0nA , 0~20mA:312.5nA		4~20mA:1.00nA , 0~20mA:1.25nA			
Accuracy		±0.10% or less (when ambient temperature is 25°C±5°C)		±0.10% or less (when ambient temperature is 25°C±5°C)			
		±0.25% or less (when ambient temperature is 0°C~55°C)		±0.3% or less (when ambient temperature is 0°C~55°C)			
Conversion speed		10ms/4channels					
Absolute Max. input/output		±3mA		DC 24mA			
Analog input points		4 channels / 1module					
Isolation specification		Photo-coupler isolation between input terminal and PLC power (no isolation between channels)					
Terminal connected		18-point terminal					
I/O points occupied		Fixed type: 64 points, Non fixed type : 16 points					
HART communication method		Mono drop only Primary master only					
Internal-consumed current		DC5V:340mA		DC5V:200mA, DC24V:220mA			
Weight (g)		145		150			

High-speed counter module

106 / 107

Features

- Parameter setting and monitoring using XG5000
- Incremental encoder available
- Supporting various pulse input (5V, 12V, 24V)
- Various multiplication (1/2 phase pulse input)
- External present input
- Providing function to prevent from counting external signal
- Supporting HTL-level incremental encoder in the line-drive input type



Specifications


Item	XGF-H02A			XGF-HD2A				
Signal	A Phase, B Phase							
Input type	Voltage input (Open Collector)			Differential input (Line Driver)				
Signal level	DC 5/12/24V			RS-422 Line Drive/HTL LEVEL Line Drive				
No. of command	Input voltage	24V DC (17.0V ~ 26.4V)	12V DC (9.8V ~ 13.2V)	5V DC (4.5V ~ 5.5V)	Line Driver			
	Input current	7~11mA	7~11mA	7~11mA	RS-422 Line Drive			
	Min. On guaranteed voltage	17.0V	9.8V	4.5V	HTL Level Line Drive			
	Max. Off guaranteed voltage	4.5V	3.0V	1.7V				
	Counter enable	Set by program (Count only in Enable)						
	Max. counting speed	200Kpps		500Kpps (HTL input: 250Kpps)				
	No. of channels	2 channels						
	Counting range	Signed 32 Bit (-2,147,483,647 ~ 2,147,483,647)						
	Counting type [Program setting]	Linear count (Generating Carry/Borrow when exceeding counting range, Max/Min value)						
	Input mode [Program setting]	1 Phase input 2 Phase input CW/CCW input						
	Signal type	Voltage						
Up/Down counter setting	1-phase input	Program or B-phase						
	2-phase input	Phase difference						
	CW/CCW	A-phase input: Up count B-phase input: Down count						
Multiplication	1-phase input	1/2 multiplication (Programming)						
	2-phase input	1/2/4 multiplication (Programming)						
	CW/CCW	1 multiplication						
Control input	Signal	Preset signal, Signal to admit additional signal (Setting by terminal block or programming)						
	Signal level	DC 5V/12V/24V input type (Selecting terminal)						
	Signal type	Voltage						
External output	No. of output point	2 points/channel: Terminal output available						
	Type	Single comparison ($>$, $=$, $<$, $<$) or section comparison						
	Output type	Open Collector (Sink)						
Operating status display	Input signal	A-phase, B-phase, Preset signal, Signal to admit additional signal						
	Output signal	OUT1, OUT2						
	Operation status	Module Ready, Pulse input status of A, B phase						
Addition functions [Program setting]	<ul style="list-style-type: none"> • Count clear, Count latch • Section count (Set time value: 1~60000ms) • Measuring counting number per a unit time (Set time value: 1~60000ms) • Preventing from counting (Setting by internal/external input during counting) 				• Pulse frequency count (Each input channel)			
No. of occupied	Fixed type (Setting in basic parameter): 64 points							
I/O points	Variable type (Dissolving in basic parameter): 16 points							
Terminal block	40-pin connector							
Current consumption	270			330				
Weight (Kg)	0.09							

Terminal block configuration

XGF-HO2A

Pin layout	Pin number		Signal name	
	CH0	CH1		
	1	17	A12V	A phase DC12V input
	2	18	A24V	A phase DC24V input
	3	19	A_C	A phase COM
	4	20	A5V	A phase DC5V input
	5	21	B12V	B phase DC12V input
	6	22	B24V	B phase DC24V input
	7	23	B_C	B phase COM
	8	24	B5V	B phase DC5V input
	9	25	P12V	Preset DC12V input
	10	26	P24V	Preset DC24V input
	11	27	P_C	Preset COM
	12	28	P5V	Preset DC5V input
	13	29	G12V	Gate DC12V input
	14	30	G24V	Gate DC24V input
	15	31	G_C	Gate COM
	16	32	G5V	Gate DC5V input
	33	35	OUT1	Comparison output OUT1
	34	36	OUT0	Comparison output OUT0
	37	38	24V	External power supply
	39	40	24G	DC24V



Configuration

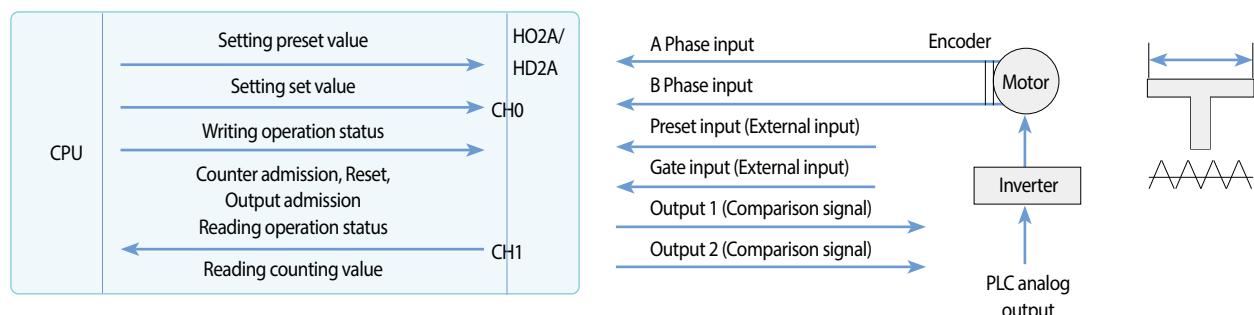

XGF-HD2A

Pin layout	Pin number		Signal name
	CH0	CH1	
AI-	17	AI-	AI-Input (LINEDRIVETTL LEVEL Input)
AI+	18	AI+	AI+Input (LINEDRIVETTL LEVEL Input)
BI-	19	BI-	BI-Input (LINE DRIVEHTL LEVEL Input)
BI+	20	BI+	BI+Input (LINE DRIVEHTL LEVEL Input)
P12V	21	Bl-	Bl-Input (LINEDRIVETTL LEVEL Input)
P24V	22	Bl+	Bl+Input (LINE DRIVEHTL LEVEL Input)
PCOM	23	Bl-	Bl-Input (LINEDRIVEHTL LEVEL Input)
P5V	24	Bl+	Bl+Input (LINE DRIVEHTL LEVEL Input)
G12V	25	P12V	Preset DC12V input
G24V	26	P24V	Preset DC24V input
GCOM	27	P_C	Preset COM
G5V	28	P5V	Preset DC5V input
AI-	29	G12V	Gate DC12V input
AI+	30	G24V	Gate DC24V input
BI-	31	G_C	Gate COM
BI+	32	G5V	Gate DC5V input
P12V	33	OUT1	Comparison output OUT1
P24V	34	OUT0	Comparison output OUT0
PCOM	35	24V	External power supply
P5V	36	24G	DC24V
G12V	37	24G	
G24V	38		
GCOM	39		
G5V	40		
CH0 OUT1 OUT0			
CH1 OUT1 OUT0			
24V 24V			
24G 24G			
-			
+			

Configuration

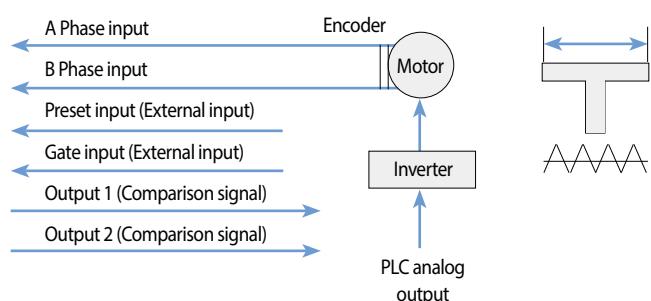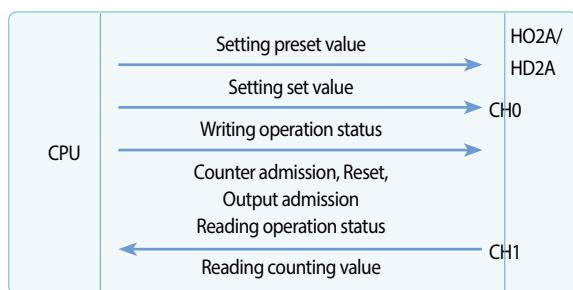

Features

- Multiple high-speed counter input support(8ch, 80-pin connector)
- Only improve performance and safety caused by the use of FPGA enhanced
- Program controlled by the preset function
- Per 1 channel output 1 point(Program setting)
- Input filter can be set (100kpps, 10kpps, 1kpps, 0.1kpps)
- The output signal through the operation status display



Specifications


Item	XGF-H08A						
No. of Channels	8 channels						
Phase	1-phase input, 2-phase input						
Signal level	5V DC (7 to 11mA), 24V DC (7 to 11mA)						
Input type	1/2/4 multiplication, CW/CCW						
Max. counting speed	200 kpps						
Input filter	None, 100kpps, 10kpps, 1kpps, 0.1kpps						
Counting range	Signed 32bit (-2147483648 ~ 2147483647)						
Counting type	Linear counter, Ring counter						
Up/Down Counter setting	<table border="0"> <tr> <td>1-phase input</td><td>B-phase : Up/Down count</td></tr> <tr> <td>2-phase input</td><td>Phase difference</td></tr> <tr> <td>CW/CCW</td><td>A-phase : Up count, B-phase : Down count</td></tr> </table>	1-phase input	B-phase : Up/Down count	2-phase input	Phase difference	CW/CCW	A-phase : Up count, B-phase : Down count
1-phase input	B-phase : Up/Down count						
2-phase input	Phase difference						
CW/CCW	A-phase : Up count, B-phase : Down count						
Multiplication	<table border="0"> <tr> <td>1-phase input</td><td>1/2 multiplication(Programming)</td></tr> <tr> <td>2-phase input</td><td>1/2/4 multiplication(Programming)</td></tr> <tr> <td>CW/CCW</td><td>1 multiplication</td></tr> </table>	1-phase input	1/2 multiplication(Programming)	2-phase input	1/2/4 multiplication(Programming)	CW/CCW	1 multiplication
1-phase input	1/2 multiplication(Programming)						
2-phase input	1/2/4 multiplication(Programming)						
CW/CCW	1 multiplication						
External output type	<table border="0"> <tr> <td>Comparison detection</td><td>Single comparison(>,>=,=,<,<=)</td></tr> <tr> <td>Output points</td><td>1 point/channels : Internal or External output (programming)</td></tr> <tr> <td></td><td>Open collector output(Sink)</td></tr> </table>	Comparison detection	Single comparison(>,>=,=,<,<=)	Output points	1 point/channels : Internal or External output (programming)		Open collector output(Sink)
Comparison detection	Single comparison(>,>=,=,<,<=)						
Output points	1 point/channels : Internal or External output (programming)						
	Open collector output(Sink)						
Operating status display	<table border="0"> <tr> <td>Input signal</td><td>A-phase, B-phase</td></tr> <tr> <td>Output signal</td><td>OUT</td></tr> <tr> <td>Operating condition</td><td>Module ready</td></tr> </table>	Input signal	A-phase, B-phase	Output signal	OUT	Operating condition	Module ready
Input signal	A-phase, B-phase						
Output signal	OUT						
Operating condition	Module ready						
Addition functions(Program setting)							
<table border="0"> <tr> <td>Power</td><td>DC5V (600mA)</td></tr> <tr> <td>Terminal block</td><td>80-pin connector</td></tr> </table>		Power	DC5V (600mA)	Terminal block	80-pin connector		
Power	DC5V (600mA)						
Terminal block	80-pin connector						

High-speed counter module (Example)


110 / 111

System Configuration

This is a simple example of high-speed counter module setting.
For more details, refer to user's manual.

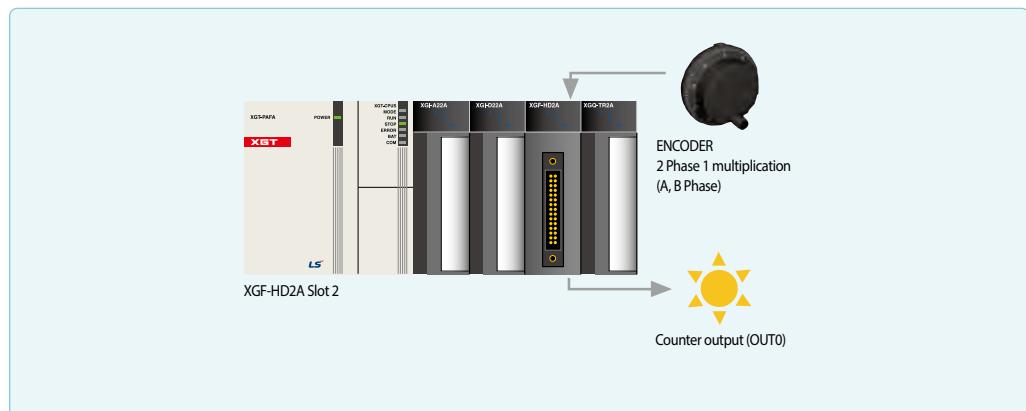

Wiring

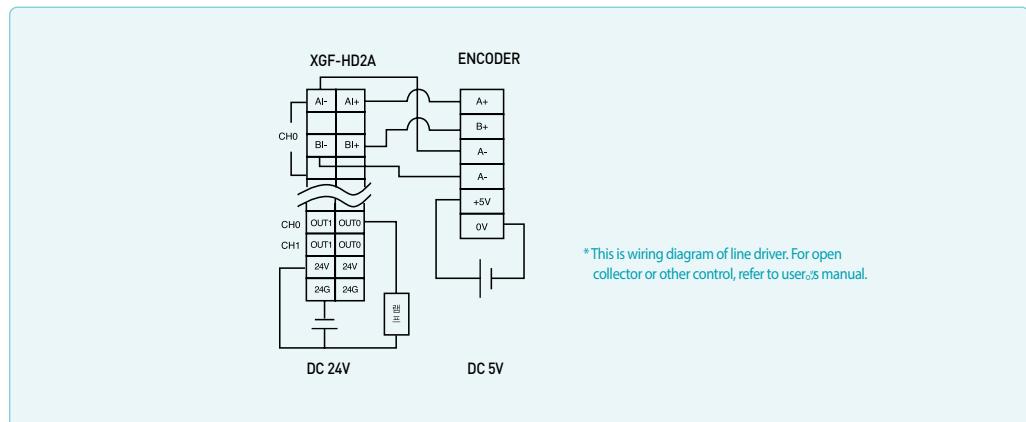


Control configuration

- Light a lamp of output when present value reaches 1000 of pulse input counted by encoder.
- Current value of pulse is saved in D100~D101 and is monitored.

Module test (Online)

- Module test function of XGT enables to monitor operation status of high-speed counter module and to test-run.

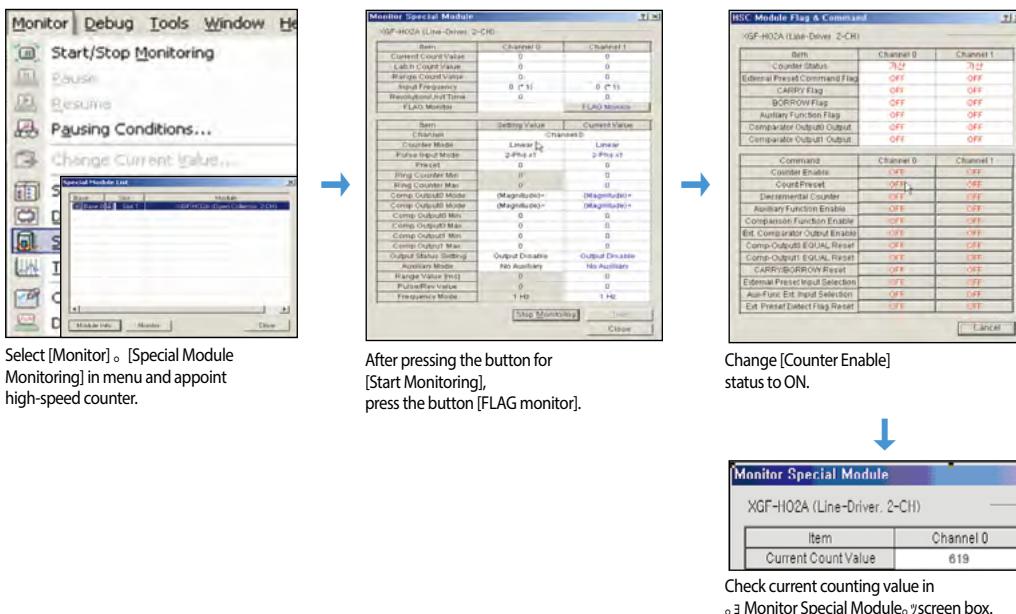


Parameter setting

- In I/O parameter setting box, select slot and analog module that you want to use.
(This example shows to select 2-channel line driver.)

Press the <Details> button at lower end of parameter setting box after selecting the module.

Input 1000 as Max. and Min. comparison output.

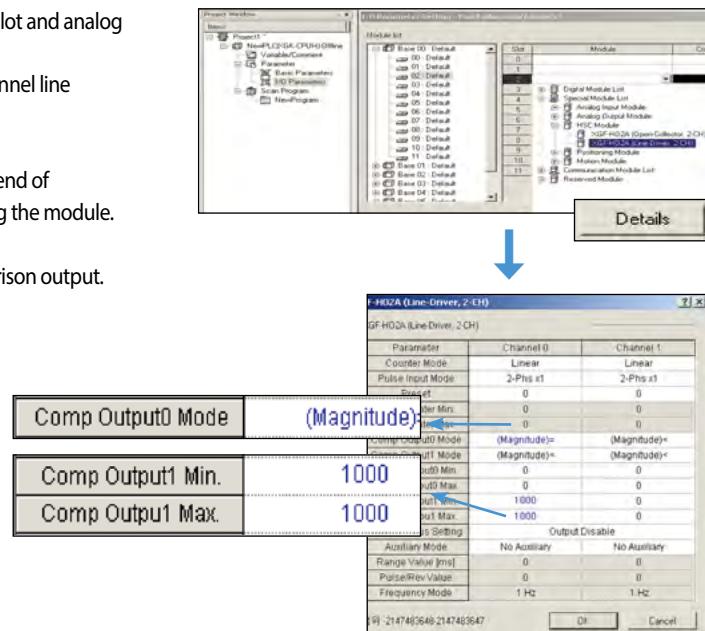

programming

- After completing programming like following figure, download it to PLC and check operation status.

Special devices for programming

Refer to user's manual for more details.

U02.23.0: Count operation admission

U02.23.1: Count preset

U02.23.4: Consistent output admission

U02.23.5: Output external terminal admission


U02.23.6: OUT0 consistent signal reset

U02.00.6: Contact for checking external output


(Practically effective output is
outputted through OUT0 terminal)

U02.02~U02.03: Counter present value


Uxy_aa.bb
x: Base number
y: Slot number
aa,bb: Refer to user's
manual

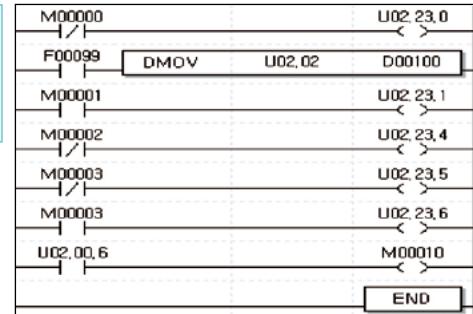

After downloading, monitor operation status.

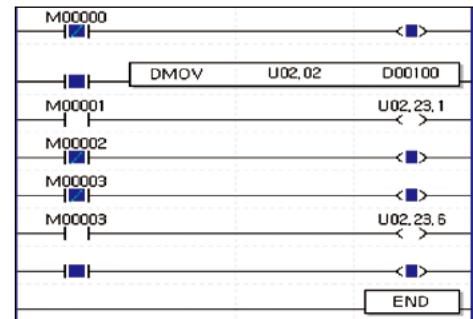

For monitoring just present value, follow the example.

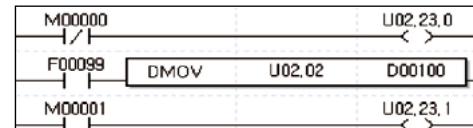

Positioning module(XPM)

Features



- Max 4Axis, Max pulse output 4Mpps
- Circular/linear/ellipse/helical interpolation
- Asymmetric acceleration and deceleration driving
- FRAM parameter
- XG5000 monitoring, simulation, trace
- CAM profile program



Specifications

Item	XGF-PO1H XGF-PD1H	XGF-PO2H XGF-PD2H	XGF-PO3H XGF-PD3H	XGF-PO4H XGF-PD4H
Number of axis	1 axis	2 axis	3 axis	4 axis
Interpolation	-	Circular, linear, ellipse	Circular, linear, helical, ellipse	
Control method		Position control, speed control, speed/position control, position/speed control, FEED		
Positioning data		Each axis has 400 data items (Operation step number 1~400). It is available to set with XG5000 or programming.		
Configuration Tool		XG5000 (Connected with USB or RS-232C Port of CPU module)		
Data backup		FRAM(Parameter, Operation data), Flash memory (CAM Data), No battery		
Pulse output		XGF-POxH: Open collector, XGF-PDxH: linedriver		
Positioning	Positioning method		Absolute / Incremental	
	mm		-214,748,364.8 ~ 214,748,364.7(nA)	
	inch		-21,474,83648 ~ 21,474,83647	
	degree		-21,474,83648 ~ 21,474,83647	
	pulse		-2,147,483,648 ~ 2,147,483,647	
	mm		0.01 ~ 20,000,000.00(nA/min)	
	inch		0.001 ~ 2,000,000.00(inch/min)	
	degree		0.001 ~ 2,000,000.00(degree/min)	
	pulse	1 ~ 500,000(pulse/sec): Open collector, 1 ~ 4,000,000(pulse/sec): linedriver		
	RPM		0.1 ~ 100,000.0(RPM)	
Accel/Decel pattern		Trapezoidal & S-curve acceleration/deceleration		
Accel/Decel time		0~2,147,483,647ms		
Max. output pulse		Open collector: 500kpps, linedriver: 4Mpps		
Max. distance		Open collector: 5m, linedriver: 10m		
Max. encoder input		500kpps		
Error display		LED		
Size of cable		AWG #24		
Occupied points of I/O		64 points (Fixed type), 16 points (Variable type)		
Connection connector		40Pin	80Pin	
Current consumption (mA)	XGF-PO1H:400mA	XGF-PO2H:410mA	XGF-PO3H:420mA	XGF-PO4H:430mA
	XGF-PD1H:520mA	XGF-PD2H:600mA	XGF-PD3H:850mA	XGF-PD4H:890mA
	120		130	

Terminal block configuration

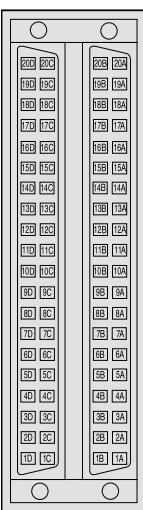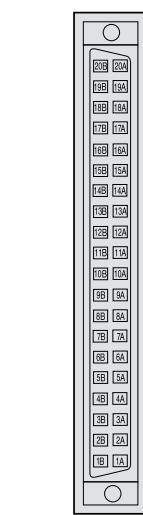

Pin number				Signal name		Remarks
AX1	AX2	AX3	AX4			
20A				MPG A+	Manual pulse generntor /Encoder A+ input	
20B				MPG A-	Manual pulse generntor /Encoder A- input	
19A				MPG B+	Manual pulse generntor /Encoder B+ input	
19B				MPG B-	Manual pulse generntor /Encoder B- input	
20C, 19C, 20D, 19D				NC	Not used	
18A	18B	18C	18D	FP+	Foward pulse (+)	
17A	17B	17C	17D	FP-	Foward COM (-)	
16A	16B	16C	16D	RP+	Backward pulse (+)	
15A	15B	15C	15D	RP-	Backward COM (-)	
14A	14B	14C	14D	OV+	Max. signal	
13A	13B	13C	13D	OV-	Min. signal	
12A	12B	12C	12D	DOG	Appoximate orgin signal	
11A	11B	11C	11D	EMG	Emergency stop	
				STOP	External stop signal	
10A	10B	10C	10D	VTP	Speed / Position switching signal	
9A	9B	9C	9D	COM	Common(OV+,OV-,DOG,EMG,STOP,VTP)	
8A	8B	8C	8D	DR	Drive ready signal	
7A	7B	7C	7D	INP	In-position	
6A	6B	6C	6D	DR/INP COM	Drive ready / In-position Common	
5A	5B	5C	5D	CLR	Deviation counter clear signal	
4A	4B	4C	4D	CLR COM	Deviation counter clear signal Common	
3A	3B	3C	3D	HOME +5V	Zero signal (+5V)	
2A	2B	2C	2D	HOME COM	Zero signal (+5V) Common	
1A, 1C				+24V	+24V	
1B, 1D				+24V COM	+24V GND	

*Open collector type module : +24V (1A/1C:24V, 1B/1D:0V)

Positioning module(Network Type)

Features

- XGF-PN8A : Dedicated LS ELECTRICEtherCAT Network Support (XGT Servo N series)
- XGF-PN4B/8B/16B : Standard EtherCAT Network Support(Standard EtherCAT Servo)
- Direct connect with servo driver Max 16
- 2~8 axis linear interpolation, 2axis circular interpolation, 3axis helical interpolation
- Position, speed, feed control is possible through the various operation
- Parameters, the operation data stored in the FRAM(without Battery)
- CAM for controlling up to eight different types of CAM data



Specifications

	Item	XGF-PN8A	XGF-PN4B	XGF-PN8B	XGF-PN16B			
	Number of axis	8axis	4axis	8axis	16axis			
	Interpolation	2~8 axis linear, 2axis circular, 3axis helical interpolation						
	Control method	Position, speed, Speed/position, position/speed position/torque, Feed control						
	Setting unit	pulse, mm, inch, degree						
	Positioning data	Each axis has 400 data items (Operation step number 1~400). It is available to set with software package or programming.						
XG5000	Port	RS-232C, USB						
	Data	Basic, expansion, manual, servo parameter, operation data, cam data, command information						
	Monitor	Operation, trace, input sort, error information						
	Back-up	FRAM(parameter, operation data) no battery						
Positioning	Positoning method	Absolute/Incremental						
	Position address range	Absolute	Incremental	Speed/position, position/speed conversion control				
		mm	-214748364.8 ~ 214748364.7 (nA1)	-214748364.8 ~ 214748364.7 (nA1)	-214748364.8 ~ 214748364.7 (nA1)			
		inch	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647			
		degree	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647			
		pulse	-2147483648 ~ 2147483647	-2147483648 ~ 2147483647	-2147483648 ~ 2147483647			
	Position speed range	mm	0.01 ~ 2000000.00(mm/Min)					
		inch	0.001 ~ 2000000.000(inch/Min)					
		degree	0.001 ~ 2000000.00(degree/Min)					
		pulse	1 ~ 20.000.000 (pulse/Sec)					
		RPM	0.1 ~ 100000.0 (RPM)					
	Accel/Decel pattern	Trapezoidal & S-curve acceleration/deceleration						
	Accel/Decel time	1~2.147.483.647 ms						
	Manual	Jog / MPG / inching						
	Homing method	[XGF-PN8A] Upper limit+Z phase(CW), lower limit+Z phase(CCW), DOG+Z phase(CW), DOG+Z phase(CCW), upper limit+DOG+Z phase(CW), upper limit+DOG+Z phase(CCW), Z phase(CW), Z phase(CCW), DGO(CW), DGO(CCW) [XGF-PN4B/PN8B/PN16B] Refer to the method supported by the servo driver						
	The ability to Change speed	Absolute/Percent						
	Torque	Rated torque %						
	Absolute position System	O (Absolute encoder type servo)						
Encoder input	Channel	2 Channel						
	Max. Input	Max. 200 Kpps						
	Input method	line-drive input (RS-422A IEC), open collector output type						
	Type	CW/CCW, Pulse/Dir, Phase A/B						
	Connector	12 Pin connector						
	Communication Cycle	800 nA		1 ms				
	Max. distance	100 m						
	Cable	STP (Shielded Twisted pair) cable						
	Error display	LED						
	Operation display	LED						
	Occupied points of I/O	64points (Fixed type), 16points (Variable type)						
	Current consumption (mA)	500 mA						
	Weight(kg)	115 g						

Terminal block configuration

XGF-PN8B/XGF-PN4B/XGF-PN8A		
Pin No.	Signal name	Signal direction
1	ENC1A+	Encoder 1 A+ input
2	ENC1A-	Encoder 1 A- input
3	ENC1B+	Encoder 1 B+ input
4	ENC1B-	Encoder 1 B- input
5	ENC1Z+	Encoder 1 Z+ input
6	ENC1Z-	Encoder 1 Z- input
7	ENC2A+	Encoder 2 A+ input
8	ENC2A-	Encoder 2 A- input
9	ENC2B+	Encoder 2 B+ input
10	ENC2B-	Encoder 2 B- input
11	ENC2Z+	Encoder 2 Z+ input
12	ENC2Z-	Encoder 2 Z- input

XGF-PN16B		
Pin No.	Signal name	Signal direction
1	ENC1A+	Encoder 1 A+ input
2	ENC1A-	Encoder 1 A- input
3	ENC1B+	Encoder 1 B+ input
4	ENC1B-	Encoder 1 B- input
5	N.C	N.C
6	N.C	N.C
7	ENC2A+	Encoder 2 A+ input
8	ENC2A-	Encoder 2 A- input
9	ENC2B+	Encoder 2 B+ input
10	ENC2B-	Encoder 2 B- input
11	N.C	N.C
12	N.C	N.C

External encoder wiring

XGF-PN8B/XGF-PN4B/XGF-PN8A		
Pin No.	Signal	
1	ENC1A+	Encoder 1A+ input
2	ENC1A-	Encoder 1A- input
3	ENC1B+	Encoder 1B+ input
4	ENC1B-	Encoder 1B- input
5	ENC1Z+	Encoder 1Z+ input
6	ENC1Z-	Encoder 1Z- input
7	ENC2A+	Encoder 2A+ input
8	ENC2A-	Encoder 2A- input
9	ENC2B+	Encoder 2B+ input
10	ENC2B-	Encoder 2B- input
11	ENC2Z+	Encoder 2Z+ input
12	ENC2Z-	Encoder 2Z- input

*Note1: Wiring of encoder 1 is example about 5V voltage output type (open collector). When using 12V, 24V type MPG, change the input voltage from 5V to 12V or 24V and in case of 12V, connect 910Ω resistor to ENC1A+[pin 1], ENC1B+[pin3], in case of 24V, 2.4kΩ resistor, before connecting the power source (adding PULL-UP resistor is needed)

*Note2: Wiring of encoder 2 is example about 5V voltage output type (line driver)

XGF-PN16B		
Pin No.	Signal	
1	ENC1A+	Encoder 1A+ input
2	ENC1A-	Encoder 1A- input
3	ENC1B+	Encoder 1B+ input
4	ENC1B-	Encoder 1B- input
7	ENC2A+	Encoder 2A+ input
8	ENC2A-	Encoder 2A- input
9	ENC2B+	Encoder 2B+ input
10	ENC2B-	Encoder 2B- input

*Note1: Wiring of encoder 1 is example about 5V voltage output type (open collector). When using 12V, 24V type MPG, change the input voltage from 5V to 12V or 24V and in case of 12V, connect 910Ω resistor to ENC1A+[pin 1], ENC1B+[pin3], in case of 24V, 2.4kΩ resistor, before connecting the power source (adding PULL-UP resistor is needed)


*Note2: Wiring of encoder 2 is example about 5V voltage output type (line driver)

XGT


XG5000

Features


- Configuration tool with updated APM software package
- All models can be used for XGT Positioning module(APM, XPM)
- Simultaneous communications can be accessed with XG5000
- Powerful simulation, trace, monitoring

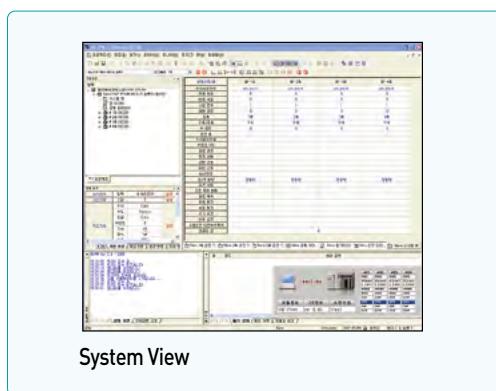


System View

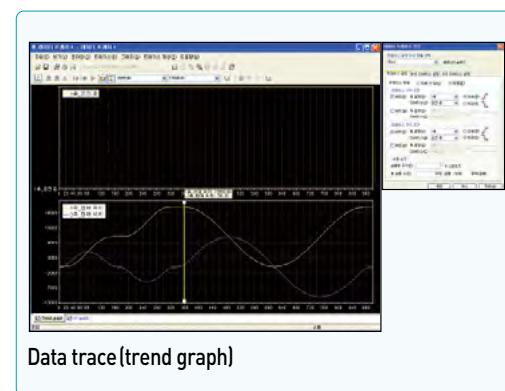

Data trace(trend graph)

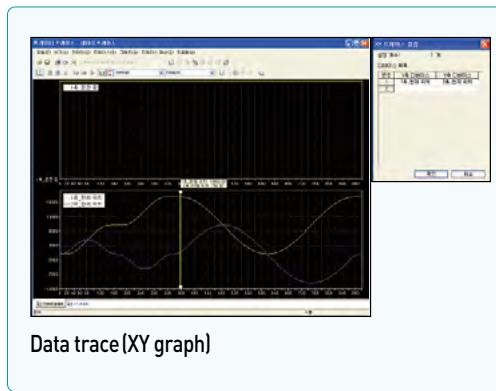


Data trace(XY graph)

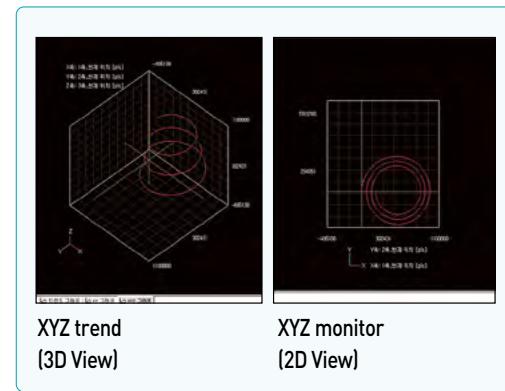


XYZ trend
(3D View)

XYZ monitor
(2D View)

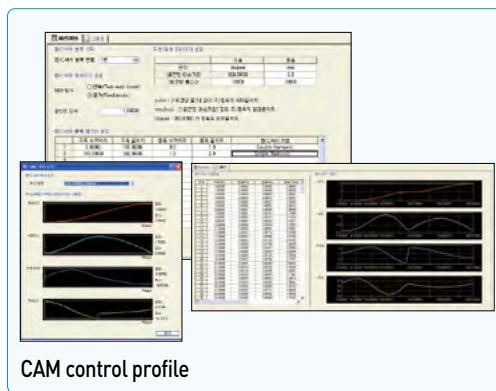

CAM control profile

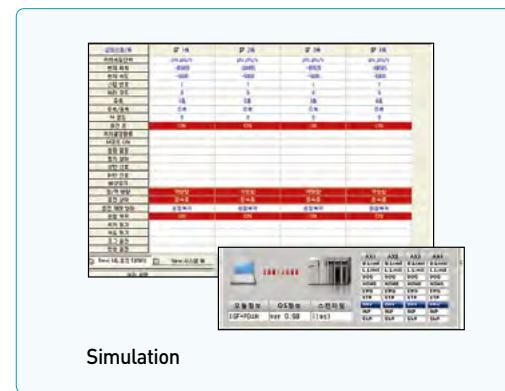

Simulation

Motion Module[EtherCAT]

Programmable Logic Controller 118 / 119

Features.


- Supports Standard Network
 - Servo Drive control through EtherCAT CoE protocol
 - EtherCAT I/O connectivity
 - Comm. Speed: 100Mbps, Distance: Max. 100M
- Various Motion Functions
 - Max. 36 Axes(including virtual axes) with synchronous and cam block settings
- XGF-M32E
 - 32 Real-axes, 4 Virtual-axes, 4 EtherCAT I/O stations supported
 - Programming Language: LD(FB), ST
 - Engineering Tool: XG-PM
- XGF-XM32E
 - 32 Real-axes, 4 Virtual-axes, 32 EtherCAT I/O stations supported
 - Programming Language: LD(FB), ST, G Code
 - Engineering Tool: XG5000
 - Moving Magnet Solution Supported
 - Backup/Restore using SD Card



Specifications

ITEM		XGF-M32E	XGF-XM32E
Communication		EtherCAT CoE	EtherCAT CoE (MDP)
Num. of Axes	Real	32 Axes	32 Axes
	Virtual	4 Axes	4 Axes
	Slave	4 Slave	32 Slave
	I/O	8 Points each	-
Control Unit		Pulse, mm, inch, degree	pulse, mm, inch, degree
Motion Program	No. of program	Max. 256	Max. 256
	Capacity	2MB	5MB(Motion), 5MB(NC)
	Language	LD(FB), ST	LD(FB), ST, G Code
Control Method		Position, Velocity, Torque, Synchronous, Interpolation Control	Position, Velocity, Torque, Synchronous, Interpolation Control
Range of Position/Velocity		±LREAL, 0	±LREAL, 0
Acc. Dec. Process		Trapezoid type, S-type	Trapezoid type, S-type
Acc. Dec. Time		1~2,147,483,647ms	1~2,147,483,647ms
Manual Operation		JOG Operation	JOG operation
Torque Unit		Rated torque % designation	Rated torque % designation
Encoder Input	Channel	2 CH	-
	Max. Input	500Kpps	
	Input Method	Line Drive / Open Collector	
	Input Type	CW/CCW, Pulse/Dir, Phase A/B	
Cam Operation		Time/Position Synchronous Cam	Time/Position Synchronous Cam
Coordinate System Function		Rectangular coordinates	Cartesian, Delta
Communication Period		1ms/2ms/4ms	1~20ms
Comm. Physical Layer/Distance		100BASE-TX/100m	100BASE-TX/100m
Consumable Current(mA)/Weight [g]		900/122	700/80
External Memory		Not Supported	Supported(Micro SDHC, SDXC)
Engineering Tool		XG-PM	XG5000

System Configuration

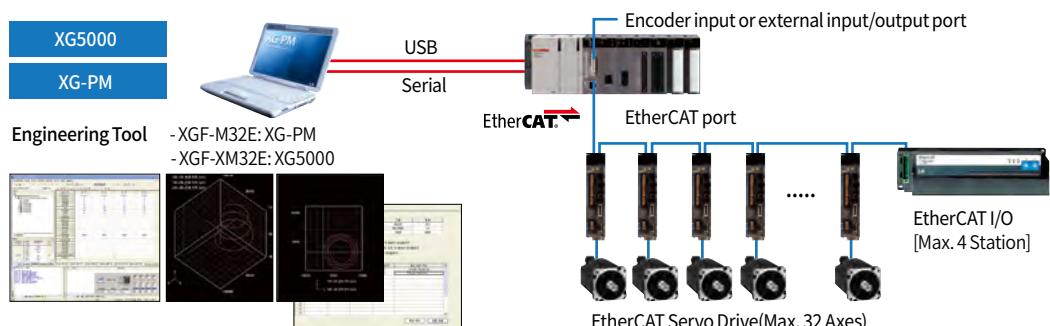

Features



- Supports various additional functions (average, alarm, filter)
- Special module parameter setting and monitoring with XG5000
- Supports digital conversion, temperature display and user scaling
- Support Offset/Gain function (only RD8A)




Specifications

Item		XGF-RD4A	XGF-RD4S	XGF-RD8A
No. of input channel		4 channels	4 channels	8 channels
Input sensor type	Pt100	JIS C1604-1997	JIS C1604-1997	JIS C1604-1997
	JPt100	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991
	PT1000	-	JIS C1604-1997	-
	NI100	-	DIN 43760-1987	-
Temperature input range	Pt100	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C
	JPt100	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C
	PT1000	-	-200.0 ~ 850.0°C	-
	NI100	-	-60.0 ~ 180.0°C	-
Digital output	Temperature display (unit: 0.1)	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: - NI100: -	-2,000 ~ 8,500 -2,000 ~ 6,400 -2,000 ~ 8,500 -2,000 ~ 1,800	-2,000 ~ 8,500 -2,000 ~ 6,400 - -
	Scaling display (Customize)		0 ~ 65535 -32768 ~ 32767	
	Accuracy	Normal temp.(25.0°C): ±0.2% Full temp.(0~55.0°C): ±0.3%	±0.1% ±70ppm/°C	±0.2% ±0.3%
	Conversion speed		40ms / channel	
Insulation	Channel to Channel	Non-insulation	Insulation	Non-insulation
	Terminal to PLC Power		Photo-coupler	
Wiring method		3-wire	4-wire	3-wire
Function	Average		Time average(320~64000ms) Counting average(2~6400 count) Moving average(2~100 samples)	
			Process alarm Input changing rate alarm Disconnection detection	
			-	0
	Offset / Gain	-	Digital filter(160~64000ms)	
Filtering				
Terminal block			18-point terminal block	
Current consumption		5V: 450mA	5V: 780mA	5V: 780mA
Weight [g]			150g	

Characteristics of temperature conversion

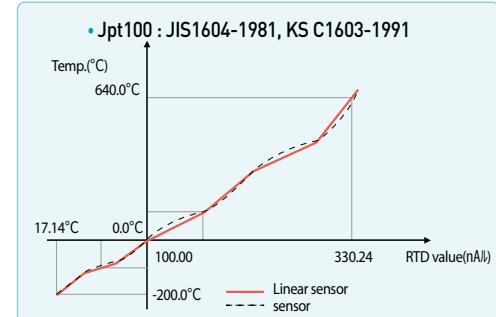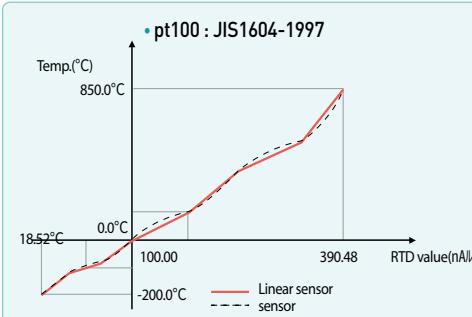

Wiring

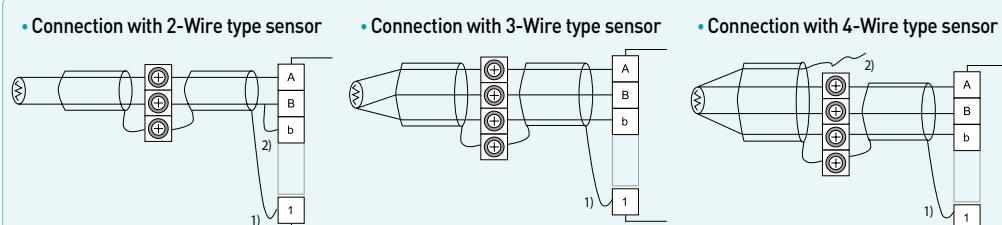

1) When sensor and compensating wire are shielded, shield-connection to FG terminal of the module is available.

2) The wiring of 4-wire type sensor is identical with the wiring of 3-wire type sensor. 3 wires is connected to the module. But the other wire is not connected with the module.

Thermocouple module

Programmable Logic Controller 120 / 121

Features


- Insulation between channels
- $\pm 0.1\%$ (25°C) constant density
- Supports various input sensor (supporting C-type sensor)
- Various additional functions (average, filter, alarm, max/min value display)
- Special module parameter setting and monitoring with XG5000



Specifications


Item	XGF-TC4S	
Input channels	4 channels	
Input sensor type	K, J, E, T, B, R, S, N, C	JIS C1602-1995ITS-90
	K	-250 ~ 1350
	J	-200 ~ 1200
	E	-250 ~ 1000
	T	-250 ~ 400
	B	400 ~ 1800
	R	-50 ~ 1750
	S	-50 ~ 1750
	N	-270 ~ 1300
	C	0 ~ 2300
	Temperature display (unit: 0.1)	Display down to the first decimal place (0.1°C)
Digital output	Scaling (User range setting)	0 ~ 65535 -32768 ~ 32767
	Normal temp. (25°C)	$\pm 0.1\%$
Accuracy	Temperature coefficient (Operating temp. range)	Some section can permit 0.5% $\pm 100\text{ppm}^\circ\text{C}$
Conversion speed	40ms/ channel	
Insulation	Between channels Insulation	
	Between terminals and power	Insulation(Photo-Coupler)
Compensation	Automatic compensation by RJC sensing (PT100)	
	Compensation degree	$\pm 1.0\%$
	Average	Average time (320 ~ 6400ms) Average number (2 ~ 64000) Average move (2 ~ 100) Process Alarm
Function	Alarm	Change rate alarm Burn-out detection
	Filter	Digital filter (160 ~ 64000ms)
	Max./Min. values display	Max./Min. values display
Terminal block	18-point terminal block	
Current consumption	5V : 610mA	
Weight (kg)	0.150	

Input wiring

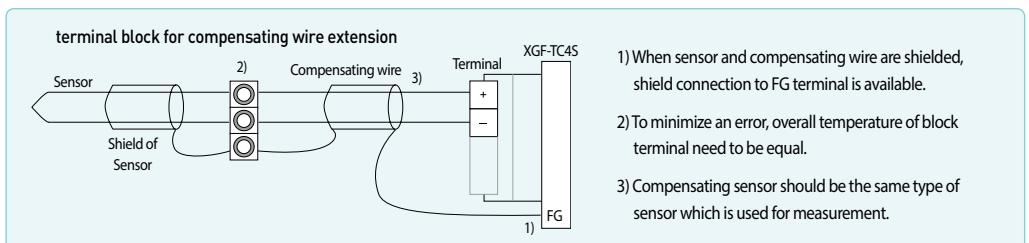

SPECIAL

Characteristics of I/O conversion

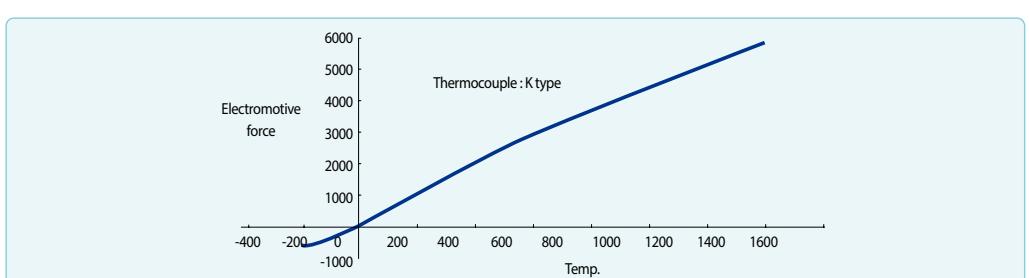

Features

XGF-TC4UD

- Optimum temperature control
- Universal input: TC, RTD, Voltage, Current
- Isolated input
- Output: Current/Transistor
- Parameter setting via dedicated software: TG-CON
- Variety of control types
 - PID control
 - Cascade control
 - On/ Off control
- Disconnection detection
- Various input functions: Bias, Filter, Square root
- Auto-tuning

XGF-TC4RT

- Input RTD : Pt100, JPt100, Pt1000
- Control Type : PID, On / Off Control




Specifications

Item	XGF-TC4UD			XGF-TC4RT
No. of loop	4 loops			4 loops
Input	Thermo couple	K	-200 ~ 1300 °C 0 ~ 500 °C	
		J	-200 ~ 1200 °C 0 ~ 500 °C	
		E	-200 ~ 1000 °C	
		T	-200 ~ 400 °C	
		B	400 ~ 1800 °C	
		R	0 ~ 1700 °C	
		S	0 ~ 1700 °C	
		N	-200 ~ 1300 °C	
		C(W5Re/W26Re)	0 ~ 2300 °C	
		PL II	0 ~ 1300 °C	
	RTD	L	-200 ~ 900 °C	
		U	-200 ~ 600 °C	
		Pt100	-200 ~ 850 °C	-200 ~ 850 °C
	Voltage	JPt100	-200 ~ 600 °C	-200 ~ 600 °C
		Pt1000	-200 ~ 800 °C	-200 ~ 800 °C
		DC mV	0 ~ 10mV	
			0 ~ 100mV	
		DCV	0 ~ 1V	
			1 ~ 5V	
			0 ~ 5V	
			0 ~ 10V	
			-5V ~ 5V	
			10V ~ 10V	
	Current	DC mA	4 ~ 20mA	
			0 ~ 20mA	
	Input channel			4 channels(Input type selection per channel)

Specifications


Item	XGF-TC4UD			XGF-TC4RT					
Resolution	Resolution Refer to the user's manual (Resolution for each input type)								
Cold junction compensation	Compensation	Automatic compensation by RJC sensor	-	-					
	Precision	$\pm 0.2^\circ\text{C}$	-	-					
Digital output	Temperature display	$0.1^\circ\text{C}/1^\circ\text{C}$ (Selection by software)	0.1°C						
	Linear display	0~1000	-	-					
	Scale display	Only for voltage/current input Range : -3,000~3,000 Setting range: 0~3000	-	-					
Conversion speed	200ms / module			400ms / 4loops					
Control type	PID, On/Off control								
	Set value (SV)	Selection per input type							
Parameter	Gain	0: ON/OFF control, Real type Range: 0.000~1000.000							
	Integrated time	0: No Differential control, Real type Range: 0.000~1000.000							
	Differential time	0: No Integrated control, Real type Range: 0.000~1000.000							
Output	No. of output channel	8 channels (PWM or analog output)							
	PWM	Rated load voltage	DC 24V						
		Max. current point	0.1A points						
		On voltage drop	DC 0.3V or less						
		Off leakage current	0.1mA or less						
		Response time [ON] → [OFF]	1ms or less						
		[OFF] → [ON]	1ms or less						
		Periodic	0.5~120.0sec (resolution: 0.5sec)						
		Time resolution	High value between 10ms or 0.5% of full scale						
	Analog output	Range	4~20mA						
Insulation	Resistance	600nA/l or less							
	Resolution	$\pm 1.0\%$, 25°C							
	Precision	8nA/ C							
	Item	Insulation	Insulation withstand voltage	Insulation resistance					
	Channel - Channel	Trans.	500V AC, 50/60Hz 1min,	500V DC, Leakage 10mA or less					
Power	Input terminal - PLC	Photocoupler	10MnA/l or more						
	Current output - Current output	Non insulation							
	External power- Output								
Warm-up	20min or more								
Terminal	18 points terminal								
Power	5V, DC 24V (external)								
Current consumption	DC 5V: 900mA (Internal) DC 24V: 300mA (external)			DC 5V: 310mA DC 24V: 28mA					

Example : Constant temperature

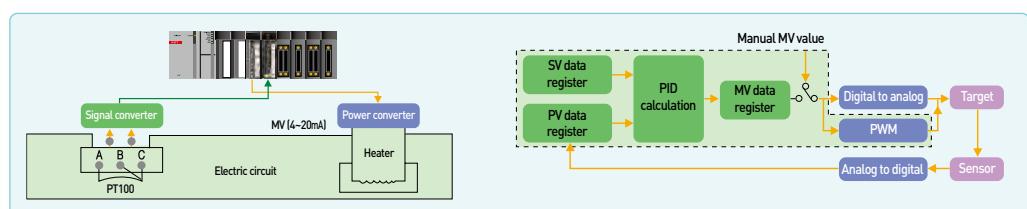


XG-TCON


- The configuration tool for the temperature control module
- Easy parameter settings, data monitoring and trend-monitor support
- Auto-tuning operation command to speed up the system is set up and test operation

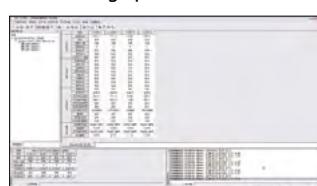

Data Monitor

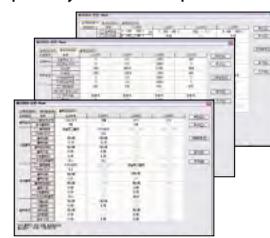

Parameter setting (input parameter)

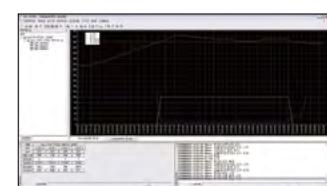

Trend monitor

Features


- SOE: Sequence Of Events Recorder
- I/O information collection to analyze the control system in Generation and Transformer
- Event collection in every 1ms
- Max. 300ea data available
- Data retain by built-in memory
- Max. installable module: 16ea
- Event monitoring of history through SOE Viewer



Specifications

Item		XGF-SOEA
No. of input point		32 points
Insulation method		Photo-Coupler Insulation
Memory size		1Mbit
The first event setting time		CPU RTC : 1 ms (± 2 ms : delay between modules) RS-422 IRIG-B : 1 ms (± 0.5 ms : delay between modules)
Rated input voltage		DC24V
Rated input current		Approx. 4mA / points
Voltage range		DC20.4 ~ 28.8V(5% and lower ripple rate)
On voltage/On current		DC19V and higher / 3 mA and higher
Off voltage/ Off current		DC11V and lower/ 1.7 mA and lower
Input resistance		Approx. 5.6 kΩ
Response time [ms]	Off → On	100us+Input filter time(User setting: 0~100ms)
	On → Off	150us+Input filter time(User setting: 0~100ms)
Clock Synchronization		CPU RTC or RS-422 by IRIG-B format
Withstand voltage		AC560V rms / 3 Cycle (altitude 2000m)
Insulation resistance		10MΩ and higher (DC500V)
COMM method		32point / COM
Current consumption		0.4 A (MAX)
Operation display		LED On with Input On
External connection method		40point connector
Size(mm)		27x98x90
Weight		0.2kg

SOE Viewer

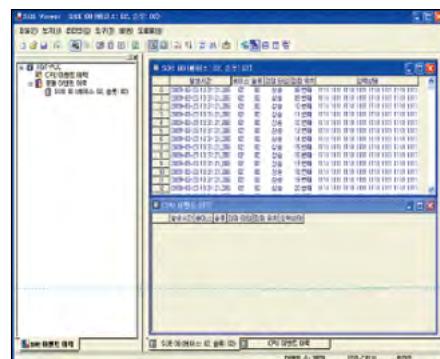

Monitoring window



Parameter setup

Datalog module

Programmable Logic Controller 124 / 125

Features


- Capable to easily save PLC device data without PC
- Capable to save PLC control data without missing any change
- Data can be saved whenever scanning is done or they can be saved at an interval of several ms(milliseconds).
- Capable to save a large volume of data file
- Long-term data saving is available since CF card and USB memory with a large volume of up to 16GB can be used.




Specifications

	Item		XGF-DL16A		
CF Card	Voltage of power supply		3.3V ± 5%		
	Card Type		CF200(Transcend's Industrial CF card)		
	Compatibility Capacity		1, 2, 4, 8, 16Gbyte		
	Number of mountable cards		1		
	Caution		Use only industrial CF cards manufactured by Transcend		
USB Memory	Voltage of power supply		5.0V ± 5%		
	Memory Type		USB 2.0 (Host function)		
	Compatibility Capacity		1, 2, 4, 8, 16Gbyte (Please use USB capacity above CF card capacity)		
	Saving Method		Auto Saving through PnP function (Activation of PnP auto duplication: when USB is mounted, when power is supplied again)		
	Number of mountable memories		1(Unavailable to support USB extension cables)		
Data Type	BOOL		0 or 1		
	BYTE		00 ~ FF		
	WORD		0000 ~ FFFF		
	DWORD		00000000 ~ FFFFFFFF		
	LWORD		00000000 00000000 ~ FFFFFFFF FFFFFFFF		
	SINT		-128 ~ 127		
	INT		-32, 768 ~ 32, 767		
	DINT		-2, 147, 483, 648 ~ 2, 147, 483, 647		
	LINT		-576, 460, 752, 303, 423, 488 ~ 576, 460, 752, 303, 423, 487		
	USINT		0 ~ 255		
	UINT		0 ~ 65,535		
	UDINT		0 ~ 4,294,967,295		
	ULINT		0 ~ 1,152,921,504,606,846,975		
	REAL		-3.402823466e+038 ~ -1.175494351e-038 or 0 or 1.175494351e-038 ~ 3.402823466e+038		
	LREAL		-1.7976931348623157e+308 ~ 2.2250738585072014e-308 or 0 or 2.2250738585072014e-308 ~ 1.7976931348623157e+308		
	STRING		Fixed letters (Maximum 8 letters)		
Data Saving	Number of Settings		Maximum 8		
	Number of Data		Maximum 32		
	Saving Kind		Saved by the ladder program		
	File Type		CSV file(Extension: csv)		
Saving Speed	Number of Saving Files		Total 800 (when using 16Gbyte CF memory)		
	Processing Score(word)	4	16	64	256
Time to Initialize CF card	Processing Speed(ms)	1	4	10	30
	Capacity(Gbyte)	1	2	4	8
	Time(s)	10	20	40	60
Collection Interval		1 ~ 9999999 ms (In consecutive saving)			
	In/output Occupation Score	32 points 1 slot(Input 22 points, output 10 points)			
	Clock	Synchronized at PLC CPU time whenever it is scanned			
	DC5V Internal Consumption Current	0.53A			
	External Size	98(H)[mm] x 27(W)[mm] x 90(D)[mm]			
	Weight	0.13kg			

System Configuration

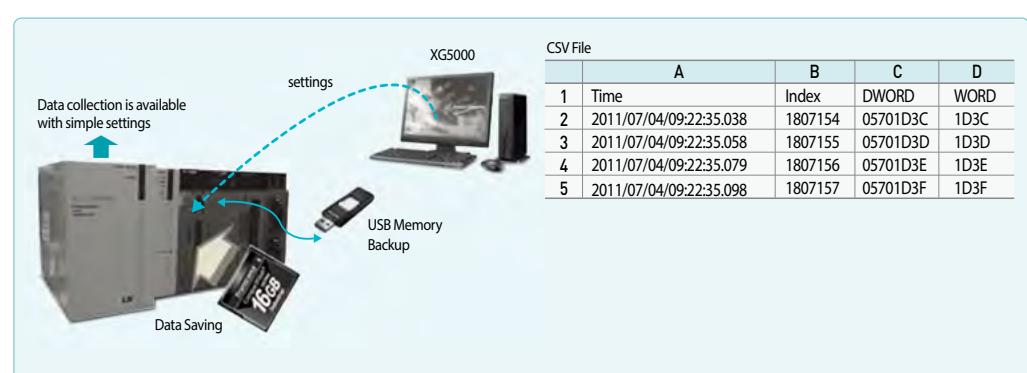

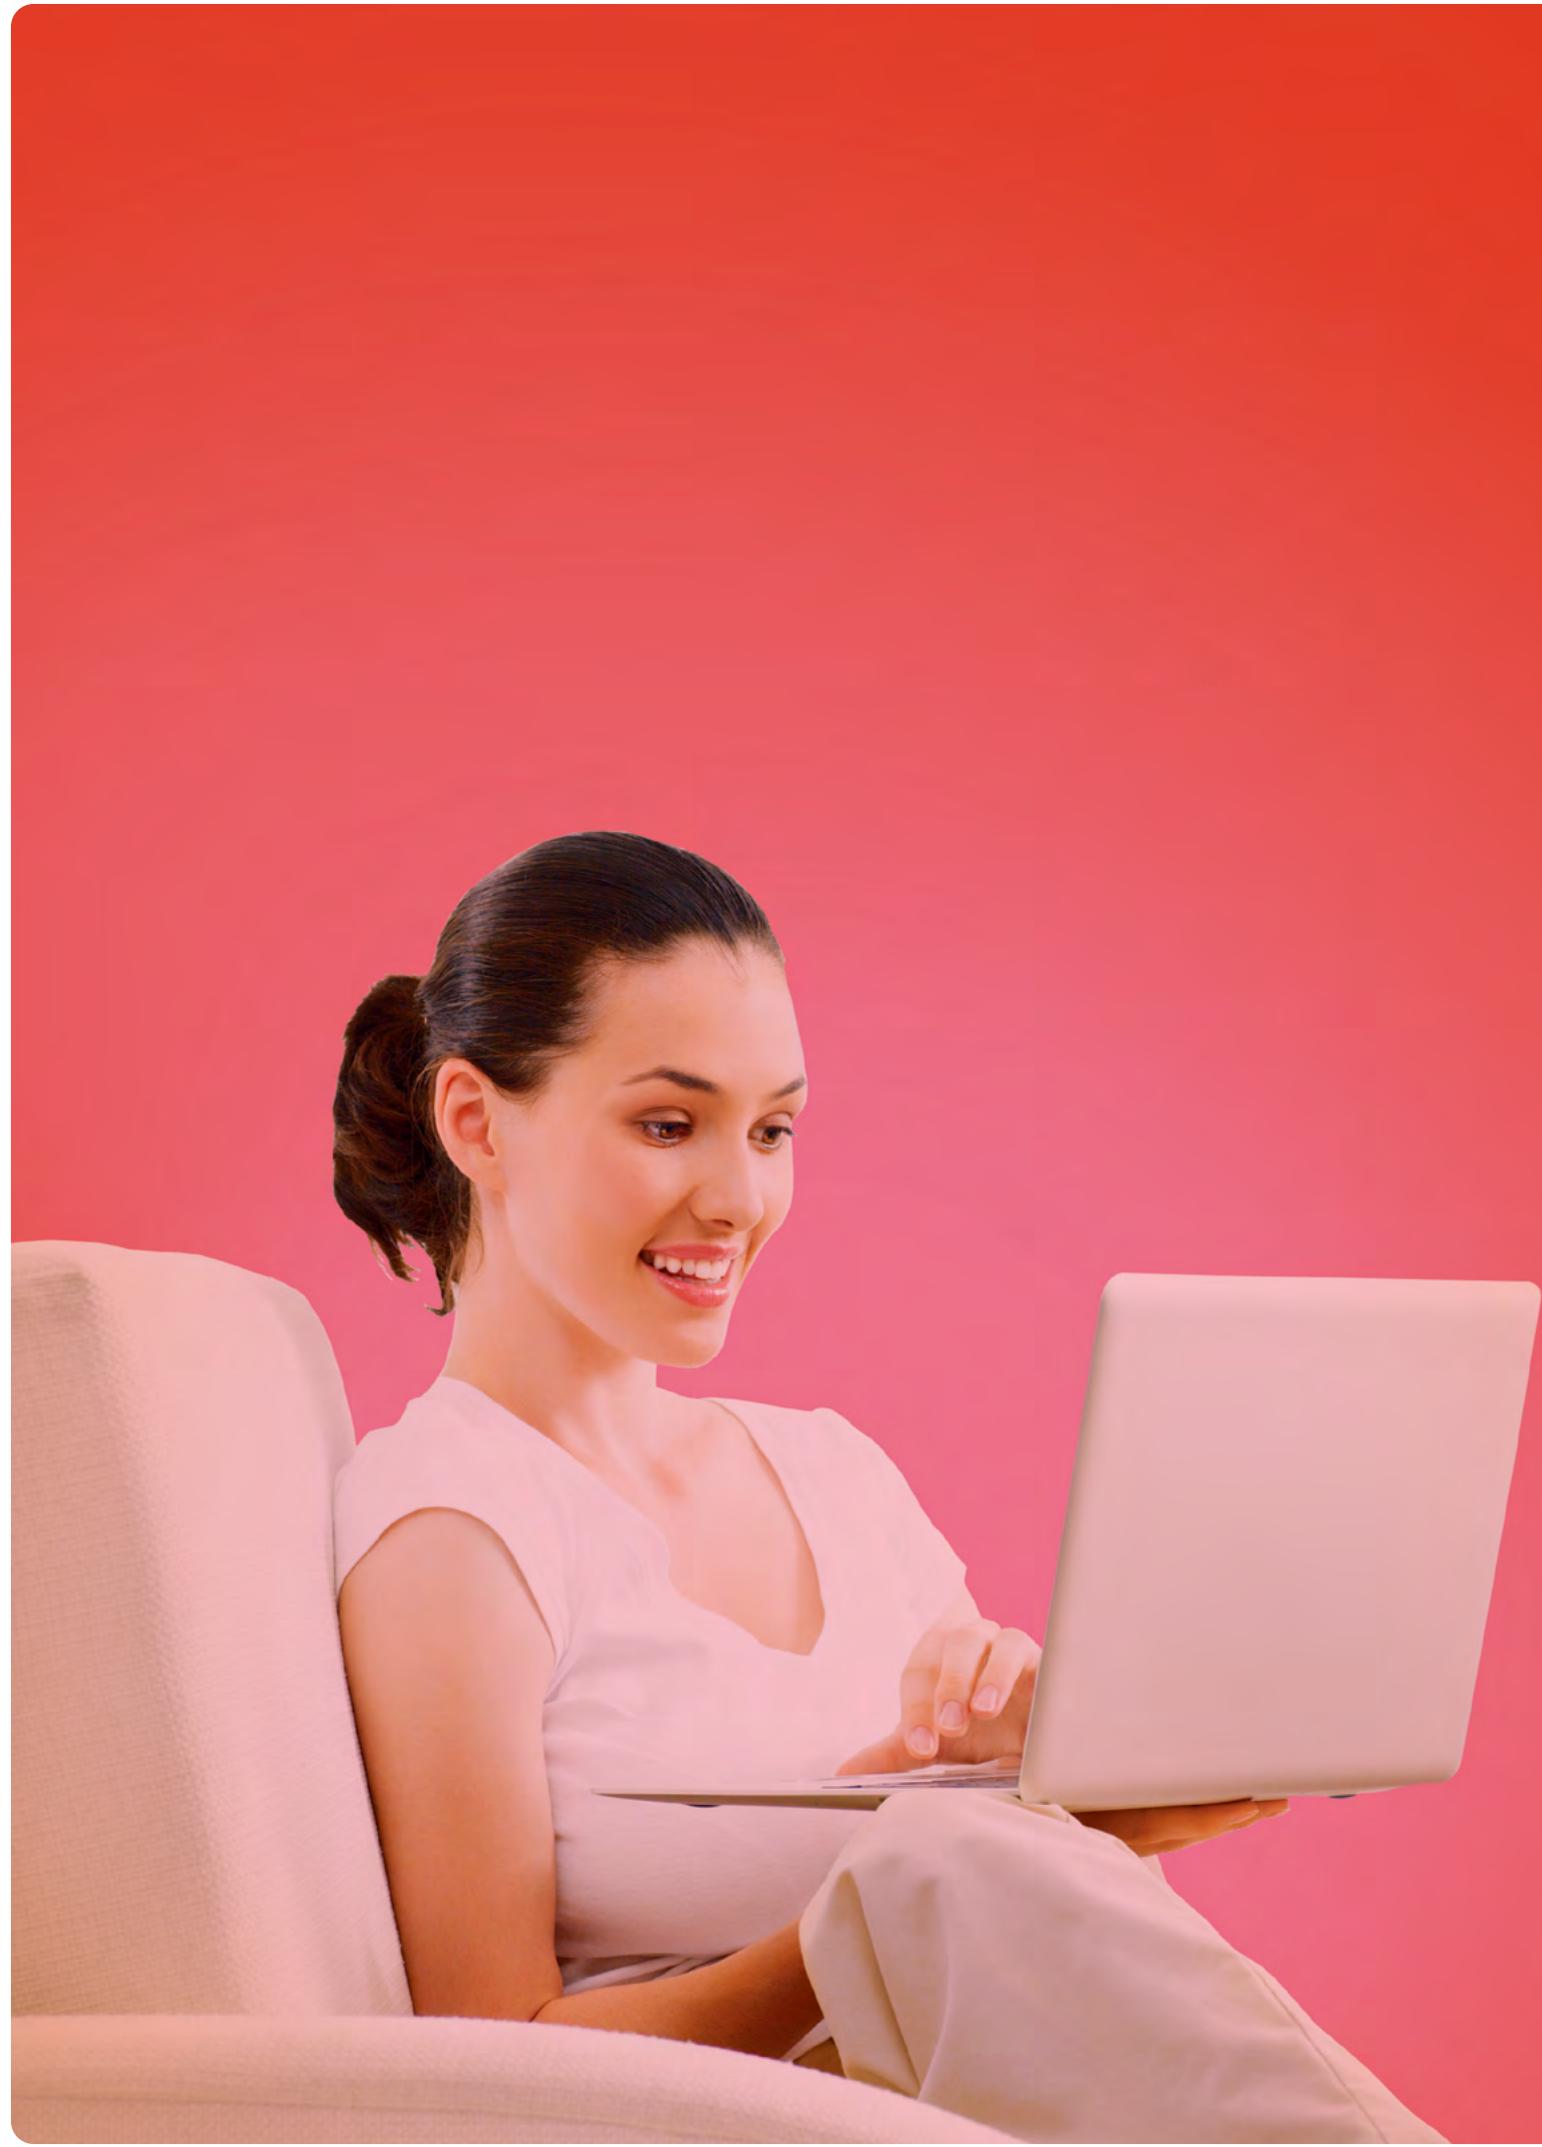



Software


Software innovation for integrated solution.

XG5000 is the optimum software which can cover various programming needs, debugging, and easy maintenance. Especially, XG5000 achieves customer satisfaction with useful maintenance tool by internet.

Contents	128 XG5000 programming
	138 XG5000 Communication Parameters
	140 XGT Panel iXP2 Series
	141 XGT Panel eXP2 Series
	143 APM[Positioning module] Software Package
	144 Product list
	146 Dimensions



- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-program, Multi-task in one project
- Various monitoring and diagnosis functions
- Windows 2000, XP, VISTA, Win7, Win8(32/64bits)
- (Limited use in Windows 98, ME)

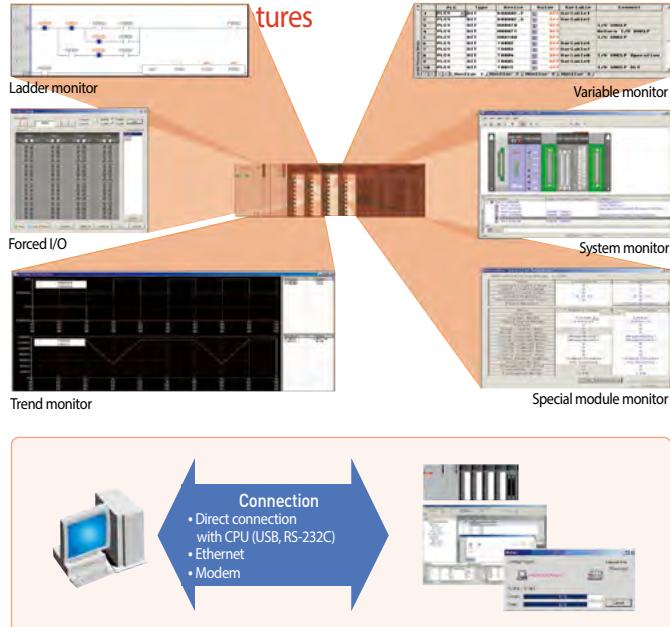

Programming tools

MPMP (Multi-PLC Multi-programming)


Different PLC systems can be edited, monitored, and managed simultaneously in one project.

Drag & Drop

It is available in project, variable/comment, ladder diagram editing and monitoring.

User-defined shortcut keys

User-defined shortcut keys increase editing convenience.

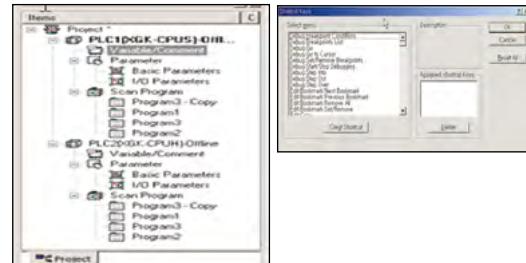


Monitoring




Special module monitoring
Monitoring and test-run of various special modules are available.



Trend monitoring
The changing value of specific device can be monitored and saved as a file.

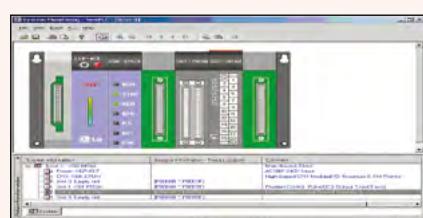

System monitoring

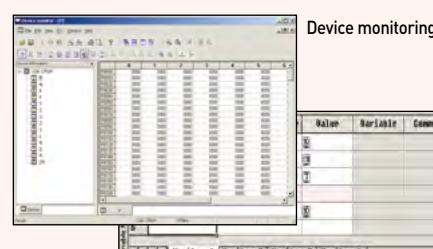

Device monitoring


Variable monitoring

System requirement

Item	System requirement
O/S	Windows 2000, XP, VISTA, Win7, Win8(32/64bits) (Limited use in Windows 98, ME)
CPU	IBM compatible PC with Min. 200MHz Pentium processor
Memory	Min. 128M
HDD	100 MB (Free memory space)
Serial port	Communication port for program transmission (RS-232C, USB)
Printer	Compatible with Windows 98 or later
Mouse	Compatible with Windows 98 or later

Variable and programming editing


- Data input like EXCEL
- Cell-unit edit
- Auto Fill function
- Compatible with Microsoft Excel
- Redo and Undo (Unlimited)
- Segment screen edit

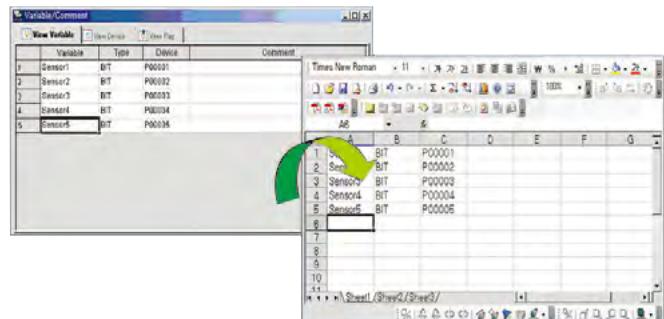

Improved diagnosis and maintenance




Module exchange wizard
It supports safe module exchange during 'RUN' mode.

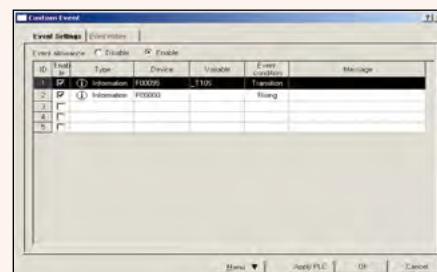

User-defined event
By registering user-defined event, users can read the record of specified event and use it for PLC operation and debugging




Forced I/O
The status of external output device can be checked without program. And when input device breaks down, forced input function specifies ON/OFF and can operate the system without interruption of equipment.

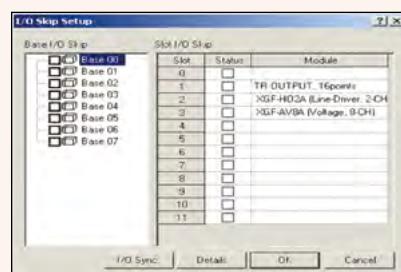

I/O skip, Error Mask
I/O inspection and renewal can be set for specific module and continuous operation is available when an error is occurred.


Program editing

- Start XG5000
- Select [New Project]
- Write project name and select CPU type

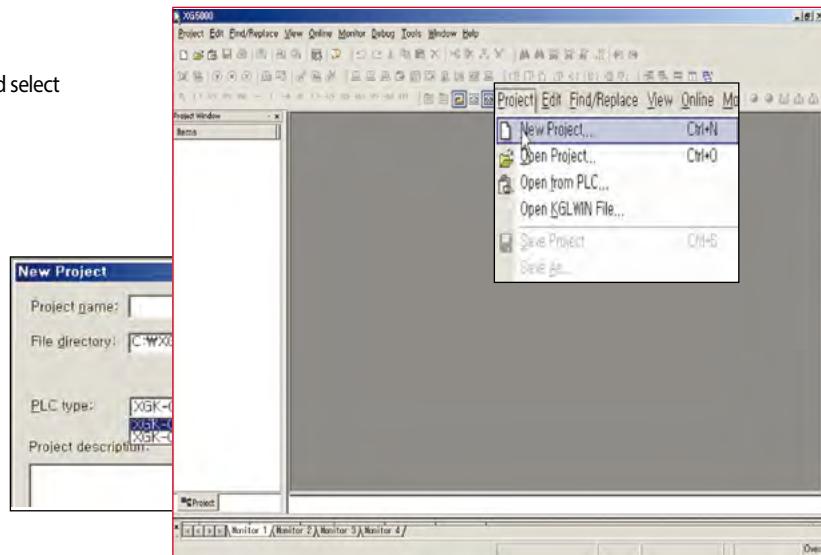

Configure ladder lines as below with ladder input tool bar

- Select input point and command with ladder tool bar.

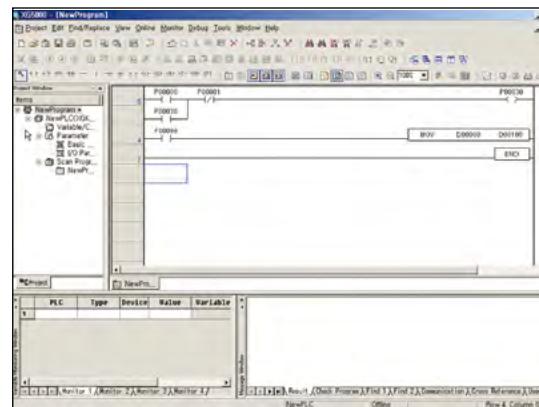

Icon	Description	Short key
[Icon: Arrow mode]	Arrow mode	ESC
[Icon: Normally open contact]	Normally open contact	F3
[Icon: Normally closed contact]	Normally closed contact	F4
[Icon: Positive transition-sensing contact]	Positive transition-sensing contact (On for 1 scan when Off On)	Shift+F1
[Icon: Negative transition-sensing contact]	Negative transition-sensing contact (On for 1 scan when On Off)	Shift+F2
[Icon: Horizontal line]	Horizontal line	F5
[Icon: Vertical line]	Vertical line	F6
[Icon: Fill horizontal line]	Fill horizontal line	Shift+F8
[Icon: Coil]	Coil	F9
[Icon: NOT instruction contact]	NOT instruction contact	Shift+F9
[Icon: Negated coil]	Negated coil	F11
[Icon: SET coil]	SET coil	Shift+F3
[Icon: RESET coil]	RESET coil	Shift+F4
[Icon: Positive transition-sensing coil]	Positive transition-sensing coil (On for 1 scan when Off On)	Shift+F5
[Icon: Negative transition-sensing coil]	Negative transition-sensing coil (On for 1 scan when On Off)	Shift+F6
[Icon: Function]	Function	F10

Note) Addition of 'EDGE' detection instructions

Develop user-friendly programming through adding D,

D NOT instructions (Rising EDGE, dropping EDGE) to contact and output coil.




Program download

Connection setting

- Check a setting for connection between XGT and XG5000
- XGT supports USB and RS-232C


Set up communication port and download speed

* using 'USB TO RS-232C' converter,
115,200bps connection may be unavailable
depending on characteristics of converter.
In this case, change the communication
speed to 38,400bps.

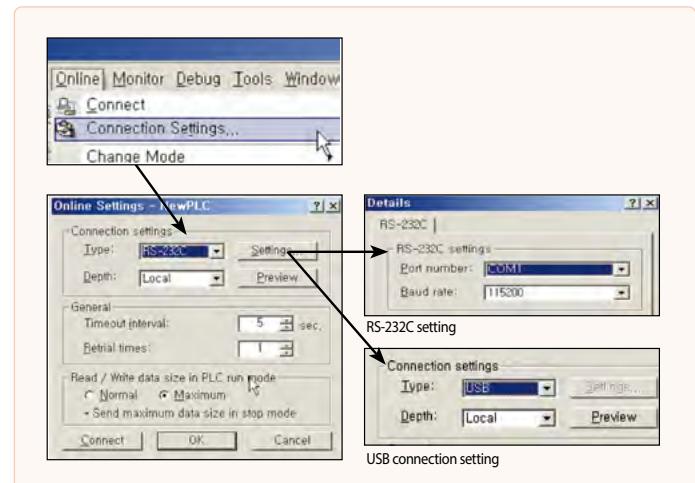


Connection

Connect to PLC and download the program as below.

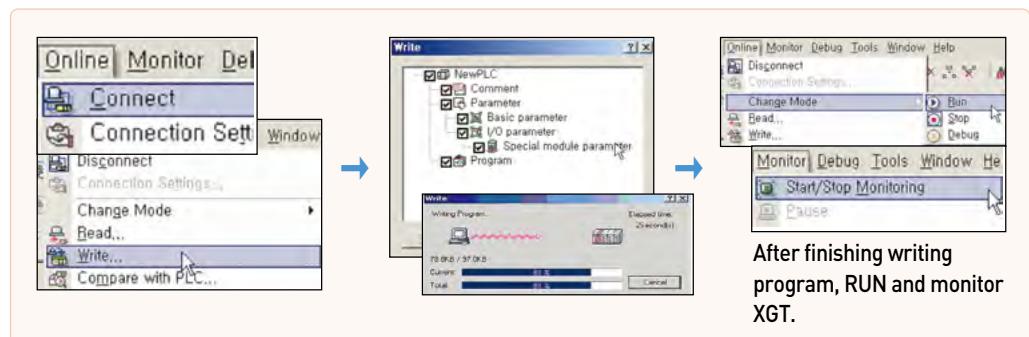


Short icon

* XGT doesn't support collective-writing monitoring for system safety.

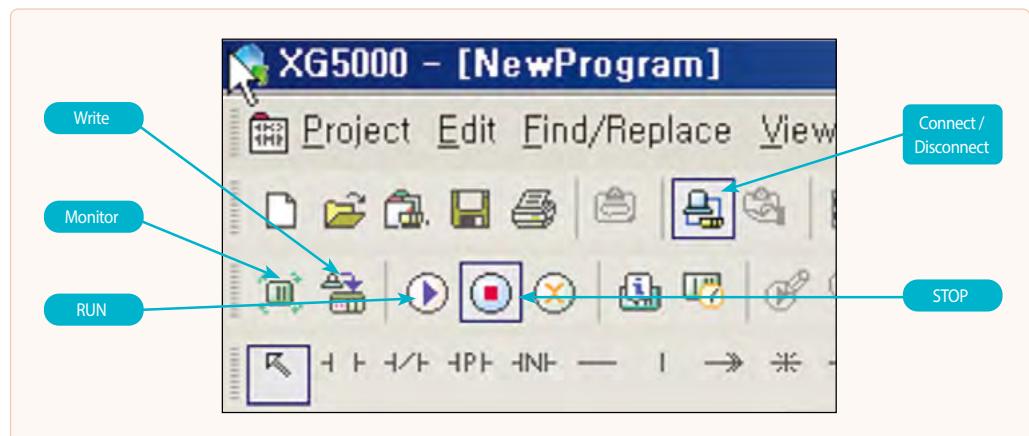


Online Editing

Select [Start Online Editing] in Online menu.

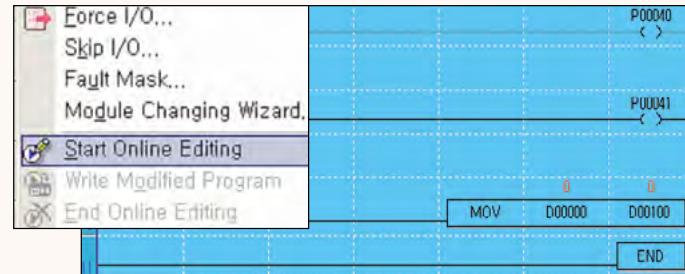


When starting Online Editing, the screen color becomes blue.

Modify the program.

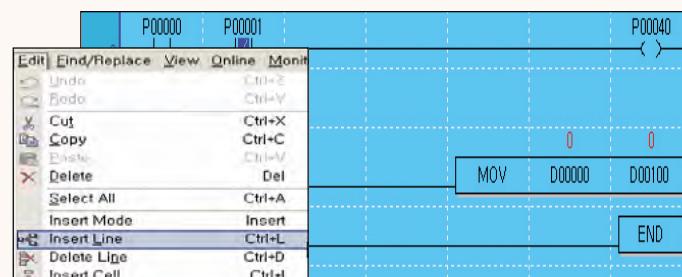


Edit menu

After finishing modifying the program, select [Write Modified Program] and [End Online Editing].

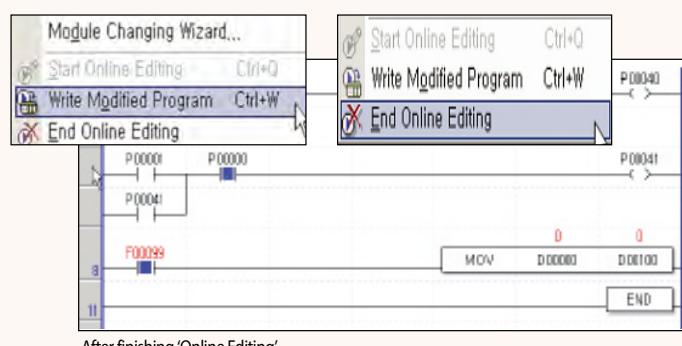

After finishing 'Online Editing'

Open a project
written in
KGL-WIN

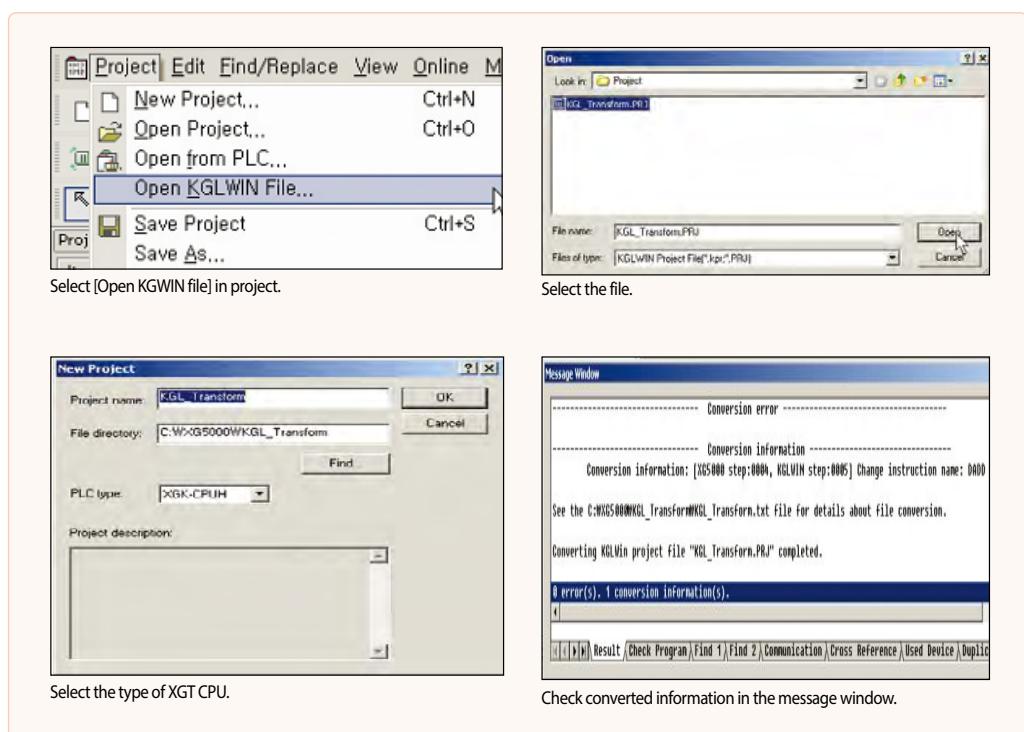

Note) Dedicated instructions and special parameters for MASTER-K cannot be converted.
Mostly General instructions and descriptions are converted.
Information impossible to be converted is displayed as ERR.


ERR

• Content of main special flag (F) change


MASTER-K	XGT	Specifications
F10	F99	ON regularly
F11	F9A	OFF regularly
F12	F9B	ON during first one scan
F13	F9C	OFF during first one scan

For more detailed information, refer to user's manual.

Data type

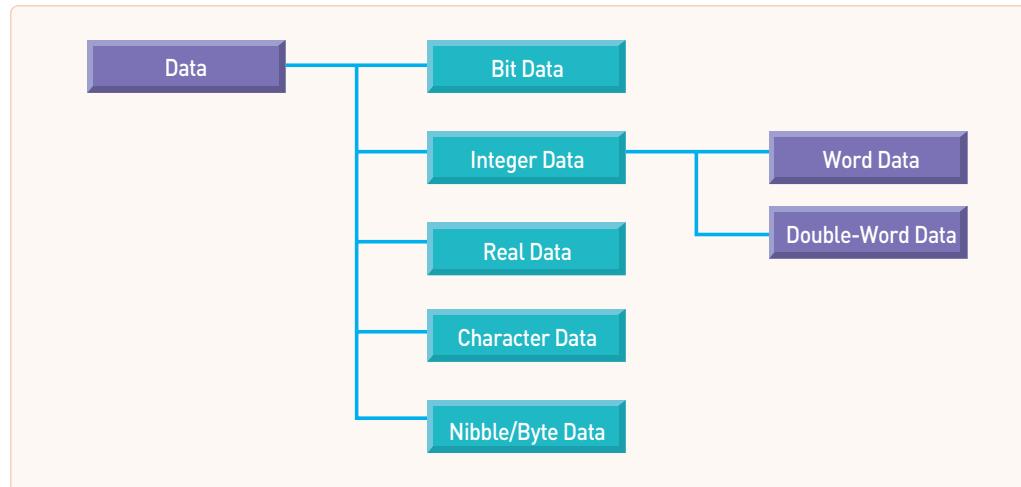

- Nibble: 4-bit unit data
- Byte: 8-bit unit data
- Real Data: 32-bit/64-bit floating point data

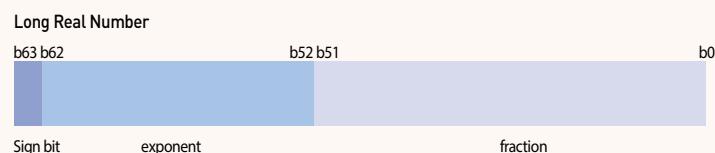

- Character Data: Saving numbers, alphabets, symbols as a type of ASCII code




Device type

Device	Size	Bit Contact	Word Data	Name
P	32768 points	P0000 ~ P2047F	P0000 ~ P2047	I/O Relay
M	32768 points	M0000 ~ M2047F	M0000 ~ M2047	Assistant Relay
L	180224 points	L00000 ~ L11263F	L0000 ~ L11263	Link Relay
N ^{*1)}	21K words	N/A	N00000 ~ N21503	Comm. data register
K	32768 points	K00000 ~ K2047F	K0000 ~ K2047	Keep Relay
F	32768 points	F00000 ~ F2047F	F0000 ~ F2047 S	pecial Relay
T ^{*2)}	2048 points	T0000 ~ T2047	T0000 ~ T2047	Timer
C ^{*3)}	2048 points	C0000 ~ C2047	C0000 ~ C2047	Counter
U	3072 words	U00.00 ~ U7F.31.F	U00.00 ~ U7F.31	Special Module Counter
Z	128 words	N/A	Z0 ~ Z127	Index Register
S	128 groups	S00.00 ~ S127.99	N/A	Step Control Relay
D	32K words	D00000.0 ~ D32767.F	D00000 ~ D32767	Data Register
R (Internal RAM) ^{*4)}	32K words	R00000.0 ~ R32767.F	R00000 ~ R32767	File Register
ZR (Internal RAM) ^{*5)}	32K words	N/A	ZR00000 ~ ZR65535	File Register
R (Expanded)	1M words	N/A	Available as much as extension size	File Register
ZR (Expanded)	1M words	N/A	Available as much as extension size	File Register

- Note)** 1. When communication module is not used, it can be used as internal data area.
 2. Word data in timer shows a current value of relevant bit contact.
 3. Word data in counter shows a current value of relevant bit contact
 4. Even when using more than 32K words internal RAM, bit contact available to display is R00000.0~R32767.F Also word data enable to be displayed in the range of R00000.0~R32767.F
 5. When internal RAM is more than 32K words, bit contact can be in the range of ZR00000~ZR32767.F and word data can be displayed as much as the size of internal RAM

Special module register U


Register for reading data from special module mounted in slot

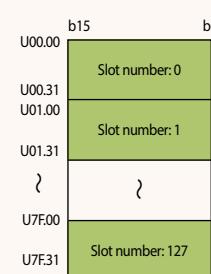

- Assigning 32 words per slot in U area
- Bit type display available
Ex) U93.12.x (x: Bit location, Hexadecimal display)
- Available to read/write internal memory value of special module without using PUT (P), GET (P), PUTS (P), GETS (P)
- Basic display in U area
Ex) Uxy.z
x: Base number (0~7)
y: Slot number (0~F)
z: Word number of special module internal memory

File register R, ZR

Register that a recorded value is not deleted when power failure is occurred. File register is used for data backup or data storage.

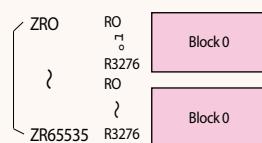


R: Block unit access
 ZR: Entire file register access
 Internal RAM (Temporary preservation): 32K words
 FLASH (Permanent preservation): 1M words

Index register

Index register sets up devices using index function.


The sum of index register value and directly specified device number is real device number.

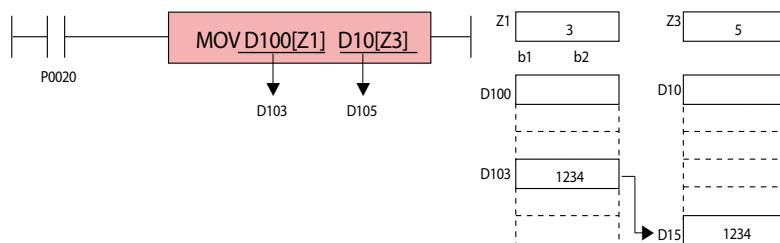

Available Device

- Bit Device: P, M, L, K, F, T, C
 - Word Device: U, D, R, ZR, N, present value of T and present value of C
- Ex) MOVT1[Z1] D10 : If Z1 is 5, present value of T(1+5)=T6 is transmitted to D10.
Ex) LOAD D10[Z1].5 : If Z1 is 5, LOAD(10+5).5 => LOAD D15.5 is set.

Bit specifying method of word device

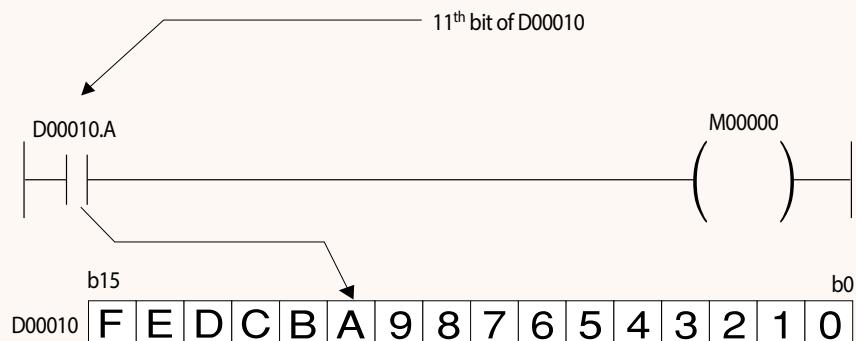



By assigning bit number to word device, bit data is available to use.

Word device number	.	Bit number
--------------------	---	------------

In this case, word device number should be addressed as decimal and bit number should be addressed as hexadecimal.

Relevant Device: U, D, R

Instructions

Classification	Designations	Symbol	Description	No. of step
16 Bits transfer	MOV		(S) → (D)	2
	MOVP			3
32 Bits	DMOV		(S+1, S) → (D+1, D)	2
	DMOVP		(S+3, S+2, S+1, S) → (D+1, D)	4
				5

① Classification: Classifies instructions into applications.

② Designations: Displays instruction names to be used in program.

- Display rules: Instructions shall be basically displayed in word unit. According to data size, operation characteristics, real number data process, text process, the rules are as follows;

- Based on Data Size & Type

D: Double Word related instruction.

R: Real Number related instruction.

L: Long Real Number related instruction.

However, LMOV is 64 Bits transfer instruction.

\$: String related instruction.

G: Group calculation.

4: Nibble related instruction, used only at the back of instruction.

8: Byte related instruction, used only at the back of instruction.

3: Instruction that process 3 operands, used only at the back of instruction.

- Based on Operation Characteristics

P: Instruction that is executed for 1 scan when input signal is changed OFF => ON

③ Symbol: Displays symbols used in program, showing the number of used operands and the type of Source or Destination. Operand display rules are as follows;

S: Source, with data value not changed after calculated.

D: Destination, with data value changeable after calculated.

N, n: The number to process.

St, En: Start and End, used only in BSFT & WSFT.

Sb: Source in case Bit position is specified, mostly used in Nibble/Byte instruction.

Db: Destination in case Bit position is specified.

Z: Control word, which means previously specified format as based on each instruction.

④ Description: Describes general functions of instruction.

⑤ No. of step: The number of basic steps of instruction, which means the number of steps in case indirect specification, index formula and direct variable input were not used.

Features

- Default settings of the network and easy of user program
- Network system and provides extensive monitoring and control of the communication module
- Efficient implementation of a fast interface with the CPU to the network management
- Easy access with XGT and Modbus
- Rich built-in diagnostic function (Condition of CPU, Link, Auto SCAN, Frame monitor)




Item	Industrial Ethernet network				Fieldbus network				
	RAPIEnet	EtherNet/IP	Modbus TCP/IP	XGT dedication	Cnet	Fnet	Rnet	DeviceNet	Profibus-DP
Network service	Smart extension	○	○	-	-	-	-	-	-
	High speed link	○	-	-	○	-	○	○	○
	P2P	○	○	○	○	○	-	-	○
	XGT server	-	-	-	○	○	-	-	-
	Modbus server	-	-	○	-	○	-	-	-
Smart extension	Max. station	63	63	-	-	-	-	-	-
	Network cycle time	2~1000ms	2~2147483647ms	-	-	-	-	-	-
	No. of block	64	64	-	-	-	-	-	-
	Data per block	768 bytes	1400 bytes	-	-	-	-	-	-
High speed link	Max. station	64	-	-	64	-	64	63	123
	No. of block	128	-	-	128	-	64	64	123
	Send block	64	-	-	32	-	32	32	63
	Receive block	128-Sendblock	-	-	128-Sendblock	-	64-Send block	32	63
	Data per block	200words	-	-	200words	-	60words	60words	256bytes
P2P	No. of block	64	64	64	64	-	-	-	64
	Data per block	1400 bytes	1400 bytes	125 bytes	1400 bytes	256 bytes	-	-	244bytes
Transmission speed Media		100/1,000Mbps	100/1,000Mbps	100/1,000Mbps	100/1,000Mbps	900~115,200Mbps	1Mbps	1Mbps	125/250/500kbps
Topology		Ring, Line, Srat	Line, Srat	Line, Srat	Line, Srat	Bus	Bus	Bus, Srat	Bus, Srat
Configuration Tool		XG5000					XG5000 / N Configurator		

Various network diagnosis and monitoring

- Auto Scan: Searching and displaying each node connected to network
- Ping Test : Indicates the port connection status of other stations connected to the network.
- View Communication Module Log : Communication module history view function of XG5000 program can check whether error occurred and measures
- Remote O/S download : Update OS of the remote module connected to the network.
- Loopback test : This function is to check for port anomalies and performs a loopback test for each port.
- System synchronization : Synchronize current PLC status to system diagnosis
- Frame Monitor: Collecting and displaying sending/receiving frame in real time



Item	Industrial Ethernet network				Fieldbus network				
	RAPIEnet	EtherNet/IP	Modbus TCP/IP	XGT dedication	Cnet	Fnet	Rnet	DeviceNet	Profibus-DP
Communication module status	○	○	○	○	○	○	○	○	○
Service status	○	○	○	○	○	○	○	○	○
Media information	○	○	○	○	○	-	-	-	-
Auto Scan	○	○	○	○	-	○	○	○	○
Ping Test	-	○	○	○	-	-	-	-	-
View Communication Module Log	○	○	○	○	○	○	○	-	○
Remote O/S download	○	-	-	-	-	-	-	-	-
Loopback test	○	○	○	○	○	-	-	-	-
System synchronization	○	○	○	○	○	○	○	○	○
Frame monitor	-	-	-	-	○	-	-	-	-

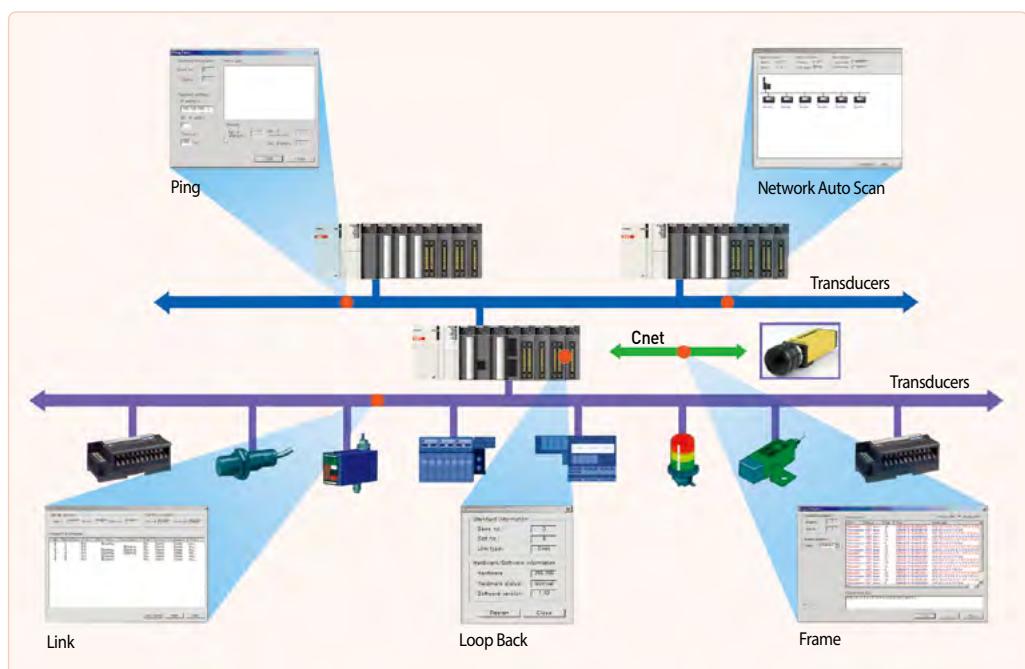

Main Specification

- Aluminum body frame, responsive touch screen.
- Easy-to-use Multi-touch, gesture, dual screen, portrait mode.
- Multi connected with 1Gbits 2ch.
- Ethernet between PC to PLC.
- Various interfaces : USB host /device, SD card, HDMI.
- High resolution : 1024 X 768
- IP66, UL type 4x, NEMA 4x standards
- Explosion proof. IECEx, ATEX, KCs



Item	iXP2-0800A/D	iXP2-1000A/D	iXP2-1200A/D	iXP2-1500A/D
Display type	TFT color LCD			
Screen size	8.4"	10.4"	12.1"	15"
Display resolution	800×600		1,024×768	
Color indication		24-bit color (16.7M colors)		
Backlight		LED method, automatic On / Off support		
Backlight lifetime		50,000 hour		
Touch panel		Capacitive touch		
Audio output		Magnetic buzzer (85dB)		
Processor		1GHz, Dual core		
Memory	Flash	1GB		
	Operating RAM	1GB		
	Backup RAM	1 Mbyte		
Backup data		Date / Time data, Logging / Alarm / Recipe data, Non-volatile devices		
Battery		CR2032(3.0V/210mAh, About 3years/25°C)		
Video output		1 × HDMI		
Ethernet		1 × 10Base-T / 100Base-TX, 1 × 10Base-T / 100Base-TX / 1000Base-T		
USB host		3 x USB 2.0 (Front × 1, Rear x 2)		
USB device		1 × USB 2.0 (Send / Receive front, PC and project data etc.)		
RS-232C		1 × RS-232C (DSUB 9 / Male type)		
RS-422/485		1 × RS-422/485 (Terminal block)		
Multi-language		Can display 12 languages simultaneously		
Animation		GIF format support		
Recipe		Support		
Data logging		Support		
Script launcher		Support		
Standard certification		CE, KC, UL, IECEx, ATEX, KCs		
Protection standard		IP66, Conform to the UL type 4x, NEMA 4x standard		
Explosion proof		Ex nA IIC T5 Gc, Ex tc IIIC T100° / Dc IP64		
Dimensions (mm)	240×180×60	271×212×60	313×239×60	395×294×66
Panel cut (mm)	228.5×158.5	259.0×201.0	301.5×227.5	383.5×282.5
Power		iXP2-xxxxA : AC100 / 240V, iXP2-xxxxD : DC24V		
Power consumption (W)	25	25	30	30
Weight (Kg)	1.87	2.35	3.0	4.6

Fully compatible with eXP

- Panel cut, interface, design, and drawing file are 100% compatible.

Superior Performance

- ARM Cortex A8 800MHz, eMMC 4G, DDR3

Enhanced product reliability

- LCD Backlight lifespan extended
- Non Battery Type NVRAM

Variety of interfaces and functions

- Various communication drivers and Micro SD I/F available




Item	eXP2-04□*0D	eXP2-05□*0D	eXP2-05□*2D	eXP2-07□*0D	eXP2-07□*1D	eXP2-07□*2D	eXP2-10□*0D	eXP2-10□*1D
Display Type								
Screen Size	10.9cm (4.3")	14.2cm (5.6")		17.8cm (7")			25.9cm (10.1")	
Display Resolution	480 x 272	640 x 480		800 x 480			1024 x 600	
Color Indication	24Bit Color (16.7M)	18Bit Color (262,144)		24Bit Color (16.7M)			24Bit Color (16.7M)	
Indication Degree	Left/Right: 60 deg. Upper: 40 deg. Lower: 50 deg.	Left/Right: 60 deg. Upper: 40 deg. Lower: 60 deg.		Left/Right: 70 deg. Upper: 50 deg. Lower: 70 deg.			Left/Right: 70 deg. Upper: 50 deg. Lower: 70 deg.	
Backlight	LED Type (Supports Backlight Auto-off Function)							
Backlight Duration	50,000 Hours	20,000 Hours		50,000 Hours			30,000 Hours	
Touch Panel	4-Wire Resistive, Analog							
Audio Output	Magnetic Buzzer (85dB)							
Process	800MHz	800MHz		800MHz			800MHz	
Memory	Drawing Memory	64MB	64MB	64MB	64MB		64MB	
	Operating RAM	512MB	512MB	512MB	512MB		512MB	
	Operating RAM	128KB	128KB	128KB	128KB		128KB	
Backup Data	Date/Hour Data, Logging/Alarm/Recipe Data and Nonvolatile Device							
Battery Life	Approx. 3 years (Operating Ambient Temperature of 50°C)							
Ethernet	1 Channel, IEEE802.1a, 10Base-T/100Base-TX	-	1 Channel, IEEE802.1a, 10Base-T/100Base-TX	-	1 Channel, IEEE802.1a, 10Base-T/100Base-TX			
USB Host	1 Channel, USB 2.0 Host (Mouse, keyboard, printer, USB flash drive, etc.)							
USB Device	-	1 Channel, USB 2.0 Device (for Download and Upload Project)					1 Channel, USB 2.0 Device (for Download and Upload Project File)	
Micro SD Card	-	-	-	1 Channel SDHC Class10	-	-	1 Channel SDHC Class10	
RS-485, RS-232C	1 Channel, RS-232C (DSUB 9/Male Type)							
RS-422/485	1 Channel, RS-422/485 (DSUB 9/Male Type)							
Multi-language	Up to 12 Language Simultaneously							
Animation	GIF Format is Available							
Recipe	Available							
Data Logging	Available							
Script Executor	Available							
Certifications	CE, UL(cUL), UL Type 4X, KC	CE, UL(cUL), KC	CE, UL(cUL), UL Type 4X, KC	CE, UL(cUL), KC	CE, UL(cUL), UL Type 4X, KC			
Protection Standard	IP65 <small>Note 1)</small>	IP65 <small>Note 1)</small>		IP65 <small>Note 1)</small>			IP65 <small>Note 1)</small>	
Dimension (mm)	128 x 102 x 32.5	165 x 132.5 x 36.1		208 x 154 x 44.4			276 x 218 x 35.1	
Panel Cut (mm)	119 x 93	156 x 123.5		192 x 138			260 x 202	
Rated Voltage	DC24V	DC24V		DC24V			DC24V	
Power Consumption (W)	4	5.5	5.5	6	6			
Weight (kg)	0.27	0.43	0.43	0.59	0.59	0.58	1.0	1.0

□*:0 (WinCE 7.0 Core), 1 (WinCE 7.0 Pro)

Note 1): IP66 for UL Type 4X models.

Text type XP10

- Screen: 192×64 Graphic STN LCD
- System RAM: 1000 words
- Flash memory: Program/Parameter back up
- Communication: Half-duplex comm.
 - Baud rate: 1200~115200 bps
 - Master/slave setting available
 - RS-232C/RS-485 2 CH separate to use
- Power requirements - 24 V input or 5 V direct input by LS PLC
- Various function key - ESC, ALM, SET, ENT, F1~F4, Arrow keys
- Panel Editor - Easy programming and H/W setting

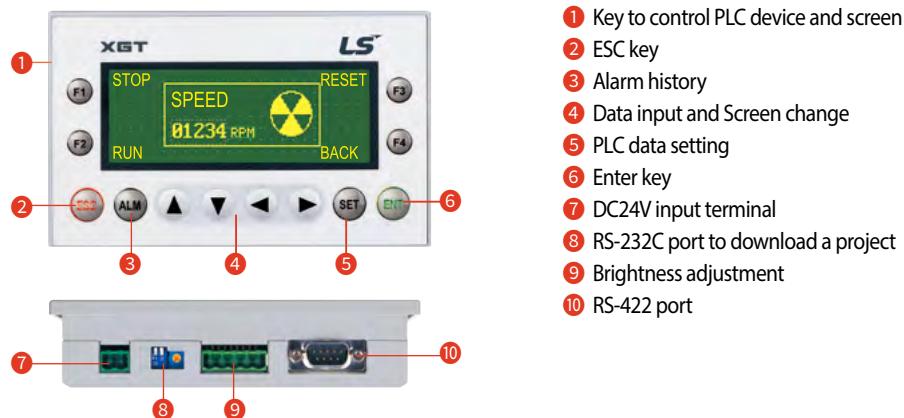


Item	Specifications	
	XP10BKA/DC	XP10BKB/DC
Input voltage	5VDC	DC 4.9 ~ 5.1 (RS-232C port)
	24VDC	DC 21.6 ~ 26.4 (DC Input connector)
	Consumption current	Less than 200mA
Display	LED back-light (192 x 64 Dots)	
Communication interface	RS-232C, RS-422/485	
Flash memory	256K bytes	
Language	Default: English, Can be switched to Korean/Chinese/Russian	
RTC	None	Supports
Download specification	115,200bps	
Keys	12 Keys (F1~F4, ESC, ALM, ▲, ▼, ▶, ▷, SET, ENT)	

APM[Positioning module]Software Package

142 / 143

Features


- Windows-based easy operation
- Supporting all types of LS APM module
- Improved parameter editing
(Copy, Paste, Initialization, etc.)
- Various monitoring
(Operation type of each axis, etc.)
- Profile trace and operation monitoring
- Profile graph and simulation of circular interpolation
- Available to edit operation parameter in EXCEL

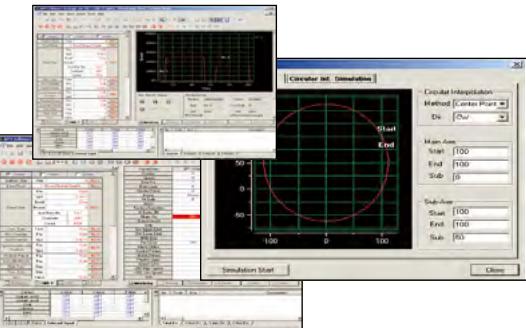

Step	Conf	Control	Pattern	Method	Address [value]	Sub Address [value]	M Code	A/D No.	Speed [mm/s]	Dwell [ms]	CW/CW
1	ABS	POS	END	SIN	10000	0	0	No.1	1000	0	CW
2	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
3	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
4	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
5	ABS	POS	KEEP	SIN	100000	0	0	No.1	0	0	CW
6	ABS	POS	END	SIN	0	0	0	No.1	10000	0	CW
7	ABS	POS	END	SIN	0	0	0	No.1	10000	0	CW
8	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
9	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
10	ABS	POS	CONT	SIN	100000	0	0	No.1	0	0	CW
11	ABS	POS	END	SIN	1000	0	0	No.1	10000	0	CW
12	ABS	POS	END	SIN	0	0	0	No.1	5000	0	CW


Operation Data

Define operation method, target location, operation speed of each axis.

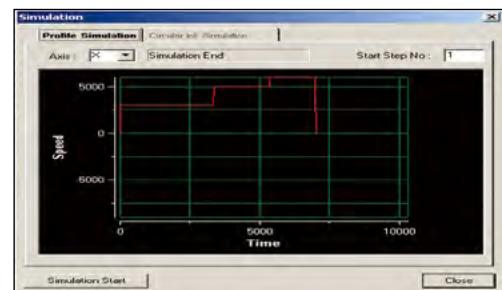


Profile simulation (Off-line)

Monitoring operation speed of each axis with graph type and saving result as image file.

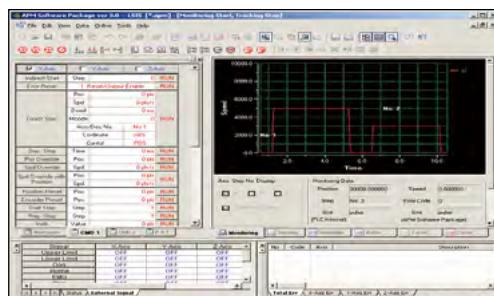


Profile Trace (On-line)

Monitoring operation speed of each axis with graph type and saving result as image file.

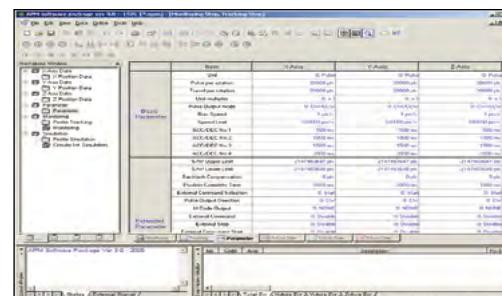


Operation parameter

Setting basic operation characteristics and limit value.

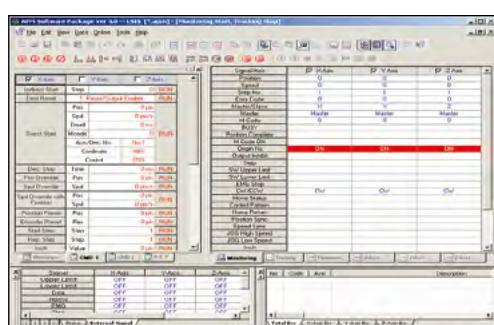

Monitoring (On-line)

Checking basic operation characteristics about each axis and monitoring operation condition.

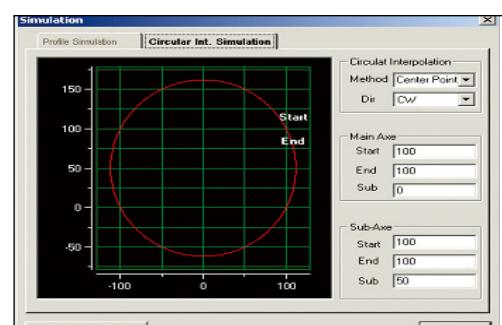

Circular interpolation simulation (Off-line)



Product list

CPU / PWR / Base / I/O

CPU	XGK-CPUH,* CPUU, CPUHN, CPUUN	6,144pt, Program memory : 64Ksteps
	XGK-CPUS,* CPUA, CPUUS	3,072pt, Program memory : 32Ksteps
	XGK-CPUE*	1,536pt, Program memory : 16Ksteps
	XGI-CPUJN, CPUJU/D, CPUU, CPUH*	9,144pt (IEC type), Program memory:1Mbyte
	XGI-CPUS*	3,072pt (IEC type), Program memory:128kbyte
	XGI-CPUE*	1,536pt (IEC type), Program memory:64kbyte
Power	XGP-ACF1*	Free Voltage/DC5V 3A, DC24V 0.6A
	XGP-ACF2*	Free Voltage/DC5V 6A
	XGP-AC23*	220V/DC5V 8.5A
	XGP-DC42*	DC24V/DC5V 6A
Main base	XGB-M04A*	4 Slot
	XGB-M06A*	6 Slot
	XGB-M08A*	8 Slot
	XGB-M10A*	10 Slot
	XGB-M12A*	12 Slot
Expansion base	XGB-E04A*	4 Slot
	XGB-E06A*	6 Slot
	XGB-E08A*	8 Slot
	XGB-E12A*	12 Slot
Input	XGI-A12A	AC110V, 16pt
	XGI-A21A	AC220V, 8pt
	XGI-A21C	AC 220V Input, 8pt(1COM)
	XGI-D21A	DC24V, 8pt
	XGI-D22A*	DC24V, 16pt, Sink/Source
	XGI-D22B	DC24V, 16pt, Source
	XGI-D24A*	DC24V, 32pt, Sink/Source
	XGI-D24B	DC24V, 32pt, Source
	XGI-D28A*	DC24V, 64pt, Sink/Source
	XGI-D28B	DC24V, 64pt, Source
Output	XGQ-RY1A	Relay, 8pt
	XGQ-RY2A*	Relay, 16pt
	XGQ-RY2B	Relay, 16pt, Surge killer
	XGQ-SS2A	Triac, 16pt
	XGQ-TR1C	Transist, 8pt(2A, 1COM)
	XGQ-TR2A*	Transist, 16pt, Sink
	XGQ-TR2B	Transist, 16pt, Source
	XGQ-TR4A*	Transist, 32pt, Sink
	XGQ-TR4B	Transist, 32pt, Source
	XGQ-TR8A*	Transist, 64pt, Sink
Input/output	XGQ-TR8B	Transist, 64pt, Source
	XGH-DT4A*	DC24V 16pt, Transist, 16pt, Sink

Special module

Analog input	XGF-AV8A*	Voltage, 8ch
	XGF-AC8A*	Current, 8ch
	XGF-AD8A*	Voltage /Current, 8ch
	XGF-AD16A*	Insulation Voltage /Current, 16ch
	XGF-AD4S*	Voltage /Current, 4ch
	XGF-AW4S*	2-wire, Voltage/ Current input, 4Ch (isolated)
Analog output	XGF-DV4A*	Voltage, 4ch
	XGF-DC4A*	Current, 4ch
	XGF-DV8A*	Voltage, 8ch
	XGF-DC8A*	Current, 8ch
	XGF-DV4S*	Voltage, 4ch, Insulation
	XGF-DC4S*	Current, 4ch, Insulation
Analog input/output	XGF-DA4S	Voltage/Current, 4ch, Insulation
	XGF-AH6A*	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
HART I/F Analog input/output	XGF-AC4H	Input: 4ch
	XGF-DC4H	Output: 4Ch
High speed counter	XGF-HO2A*	Open collector, 2ch
	XGF-HD2A*	Line drive, 2ch
Positioning	XGF-HO8A *	8-channels high speed counter module, 8Ch
	XGF-P01H-P04H	Open collector, 1~4axis
Positioning (Network type)	XGF-PD1H-PD4H	Line drive, 1~4axis
	XGF-PN8A	LS ELECTRIC EtherCAT Network, 8axis
	XGF-PN8B	Standard EtherCAT Network, 8axis
	XGF-PN4B	Standard EtherCAT Network, 4axis
Motion control	XGF-M16M	MECHATROLINK-II, 4axis
	XGF-M32E	Standard EtherCAT, 32axes
Temperature input	XGF-RD8A	RTD, 8ch
	XGF-RD4A*	RTD, 4ch
	XGF-RD4S*	RTD, 4ch, Insulation
	XGF-TC4S*	Thermo couple, 4ch, Insulation
Temperature controller	XGF-TC4UD	Input: 4Ch(Voltage/Cuttent/RTD/TC) Output: 8Ch(TR/Current) 4loops
	XGF-TC4RT	Input:4Ch(RTD) Output: 4Ch(TR) 4loops
Event input	XGF-SOEA	DC24V, 32points
Datalog	XGF-DL16A	USB 2.0, CF2001, Max. 16Gbyte, 32points(input 22points, output 10points)

* G3 Coating Products

Communication module

OPC UA	XGL-EOPCT	OPC UA, Twisted fair 2Ch
RAPIEnet+ -RAPIEnet v2 -EtherNet/IP -Modbus TCP/IP -Dedicated XGT Network	XGL-EFMTB*	Master/Client, Twisted fair 2ch.
	XGL-EFMFB*	Master/Client, Fiber optic 2ch.
	XGL-EFMHB*	Master/Client, Twisted fair/fiber optic
	XGL-DBDT	Expansion driver-Twisted pair 2ch.
	XGL-DBDF	Expansion driver-Fiber optic 2ch.
	XGL-DBDH	Expansion driver-Fiber optic/Twisted pair
	XOL-ES4T	Stand alone switch twisted pair 4ch.
	XOL-ES4H	Stand alone switch twisted 2ch. fiber 2ch.
	XGL-EH5T	Open Ethernet switching hub
Computer Link (Cnet)	XGL-CH2B*	RS-232C 1ch, RS-422/485 1ch
	XGL-C22B*	RS-232C 2ch
	XGL-C42B*	RS-422/485 2ch
DeviceNet(Dnet)	XGL-DMEB*	DeviceNet, Master
Profibus-DP (Pnet)	XGL-PMEB*	Profibus-DP, Master
	XGL-PSRA	Profibus-DP Slave, Remote interface
	XGL-PSEA	Profibus-DP Slave
Rnet	XGL-RMEB*	Rnet, Master, TP
	GOL-RR8T	Rnet stand alone repeater hub
Fnet	XGL-FMEA	Fnet, Master
BACnet/IP	XGL-BIPT	BACnet client/server
RAPIEnet V1	XGL-EIMT	RAPIEnet, Twisted fair 2ch
	XGL-EIMF	RAPIEnet, Fiber optic 2ch
	XGL-EIMH	RAPIEnet, Twisted fair, Fiber optic
EtherNet/IP	XGL-EIPT	Industrndl Ethernet, Twisted fair 2ch

* G3 Coating Products

XGR module


CPU	XGR-CPUH/T*	Twisted pair
	XGR-CPUH/F	Fiber optic(2km)
	XGR-CPUH/S	Fiber optic(15km)
Power	XGR-AC12*	110V, 5.5A(Main base)
	XGR-AC13*	110V, 8.5A(Expansion base)
	XGR-AC22*	220V, 5.5A(Main base)
	XGR-AC23*	220V, 8.5A(Expansion base)
	XGR-DC42*	DC24V/DC5V 7A, Main(Expansion base)
Base	XGR-M06P*	6Slot(Main base)
	XGR-M02P*	2Slot(Main base)
	XGR-E08P	8Slot(Expansion base)
	XGR-E12P*	12Slot(Expansion base)
	XGR-E12H*	12Slot(Expansion base, Drive Redundancy)
Expansion drive	XGR-DBST*	Twisted pair - Twisted
	XGR-DBSF*	Pair Fiber optic - Fiber optic(2km)
	XGR-DBSH*	Twisted pair - Fiber optic(2km)
	XGR-DBSFS	Pair Fiber optic - Fiber optic(15km)
	XGR-DBSHS	Twisted pair - Fiber optic(15km)
Expansion drive redundancy	XGR-DBDT	Twisted pair - Twisted
	XGR-DBDF	Pair Fiber optic - Fiber optic(2km)
	XGR-DBDH	Twisted pair - Fiber optic(2km)

* G3 Coating Products


CPU	Product	Description
Expansion cable	XGC-E041	0.4m
	XGC-E061	0.6m
	XGC-E121	1.2m
	XGC-E301	3.0m
	XGC-E501	5.0m
	XGC-E102	10m
	XGC-E152	15m
Termination connector	XGT-TERA	Termination connector for expansion base download cable
USB cable	USB-301A	USB download cable
RS232C cable	K1C-050A	RS232C download cable
Sync & Expansion cable	XGC-F201	2m (Fiber optic)
	XGC-F501	5m (Fiber optic)
Dummy	XGT-DMMA	Dummy module
	XGR-DMMA	Dummy module

Dimensions


• Base

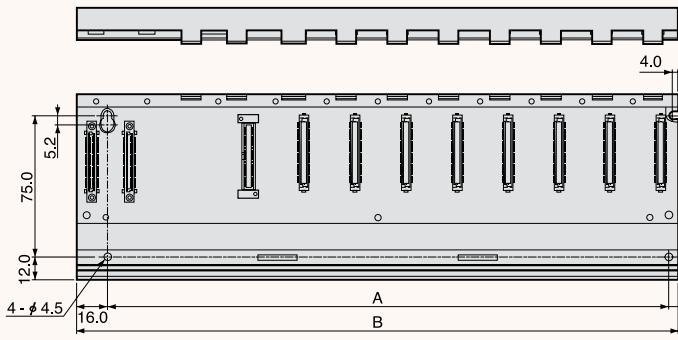

• Power module

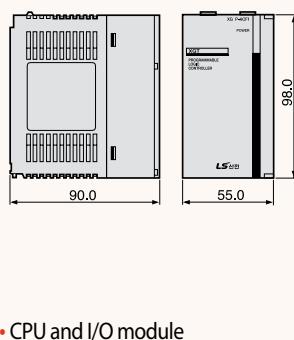


• CPU and I/O module

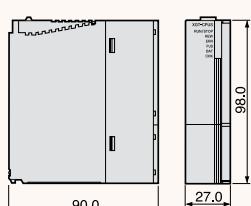


Base Dimensions (W)

Item	XGB-M04A/E04A	XGB-M06A/E06A	XGB-M08A/E08A	XGB-M10A	XGB-M12A/E12A
A	190	244	298	356	406
B	210	264	318	375	426


• Base base

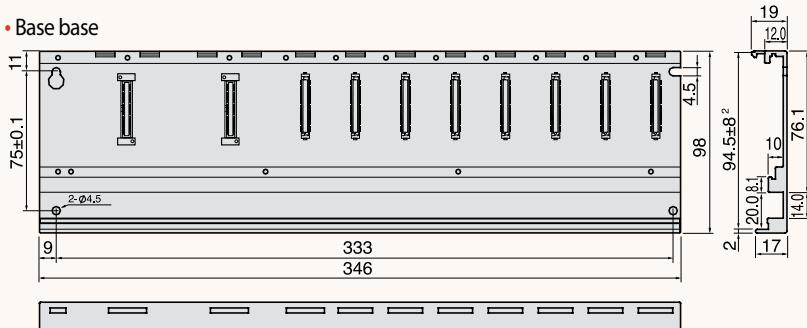


• Expansion base

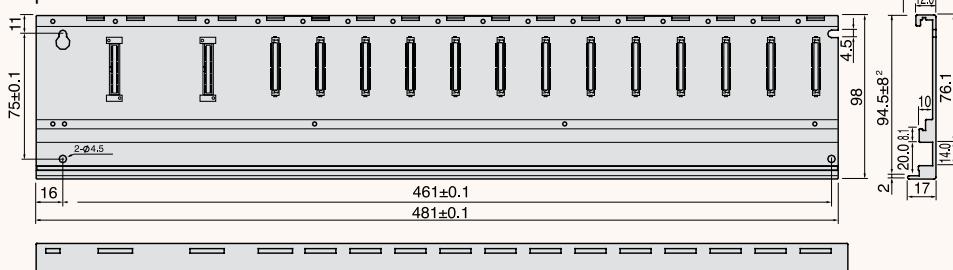

• Power and CPU

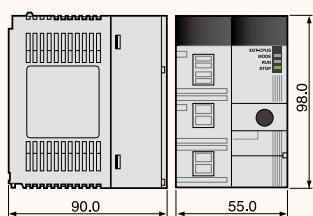

• I/O

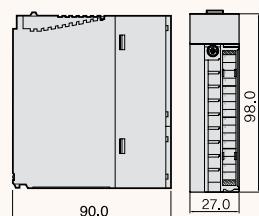

Base Dimensions (W)

Item	XGR-M06P	XGR-E08P	XGR-E12P
A	333	353	461
B	346	373	481

Memo

Programmable Logic Controller 146 / 147



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



■ Headquarter

LS-ro 127(Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea
Tel: 82-2-2034-4033, 4888, 4703 Fax: 82-2-2034-4588

E-mail: automation@ls-electric.com

■ Overseas Subsidiaries

• LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)
Tel: 81-3-6268-8241 E-Mail: japan@ls-electric.com

• LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)
Tel: 86-411-8730-6495 E-Mail: china.dalian@lselectric.com.cn

• LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)
Tel: 86-510-6851-6666 E-Mail: china.wuxi@lselectric.com.cn

• LS ELECTRIC Middle East FZE (Dubai, U.A.E.)
Tel: 971-4-886-5360 E-Mail: middleeast@ls-electric.com

• LS ELECTRIC Europe B.V. (Hoofddorp, Netherlands)
Tel: 31-20-654-1424 E-Mail: europartner@ls-electric.com

• LS ELECTRIC America Inc. (Chicago, USA)
Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com

• LS ELECTRIC Türkiye Co., Ltd.
Tel: 90-212-806-1225 E-Mail: Türkiye@ls-electric.com

www.ls-electric.com

■ Overseas Branches

• LS ELECTRIC Tokyo Office (Japan)
Tel: 81-3-6268-8241 E-Mail: tokyo@ls-electric.com

• LS ELECTRIC Beijing Office (China)
Tel: 86-10-5095-1631 E-Mail: china.auto@lselectric.com.cn

• LS ELECTRIC Shanghai Office (China)
Tel: 86-21-5237-9977 E-Mail: china.auto@lselectric.com.cn

• LS ELECTRIC Guangzhou Office (China)
Tel: 86-20-3818-2883 E-Mail: china.auto@lselectric.com.cn

• LS ELECTRIC Chengdu Office (China)
Tel: 86-28-8670-3201 E-Mail: china.auto@lselectric.com.cn

• LS ELECTRIC Qingdao Office (China)
Tel: 86-532-8501-2065 E-Mail: china.auto@lselectric.com.cn

• LS ELECTRIC Nanjing Office (China)
Tel: 86-25-8467-0005 E-Mail: china.auto@lselectric.com.cn

• LS ELECTRIC Bangkok Office (Thailand)
Tel: 66-90-950-9683 E-Mail: thailand@ls-electric.com

• LS ELECTRIC Jakarta Office (Indonesia)
Tel: 62-21-2933-7614 E-Mail: indonesia@ls-electric.com

• LS ELECTRIC Moscow Office (Russia)
Tel: 7-499-682-6130 E-Mail: info@lselectric-ru.com

• LS ELECTRIC America Western Office (Irvine, USA)
Tel: 1-949-333-3140 E-Mail: america@ls-electric.com

• LS ELECTRIC Italy office (Italy)
Tel: 39-030-8081-833 E-Mail: italia@ls-electric.com