

FRAME 80

ALUMINIUM MOTORS

Reliable, Long-Lasting and

Compact Motor Muscle for Commercial and/or Industrial Use

1/3-3HP 1PH & 3PH TEFC 60 Hz IEC AC

Inverter Duty Rated: 3:1CT & 5:1VT (3-Phase only)

Service Factor: 1.15


Protection Degree: IP55

Enclosure: TEFC

1PH available with and without thermal protection and manual reset (TP)

Aluminium IEC

Energy saving design

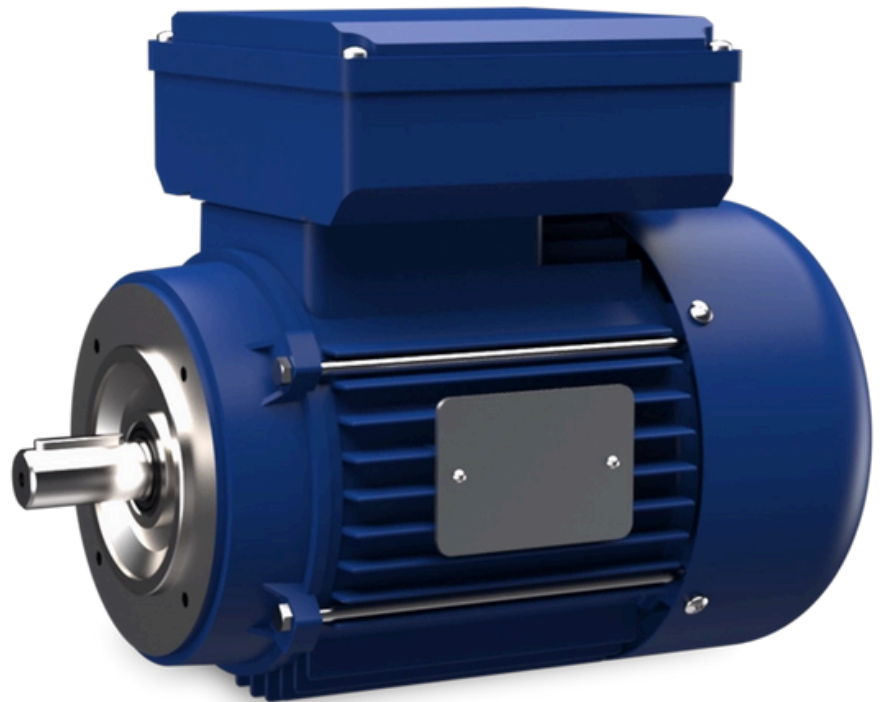

 **Giravan**

80 Frame Aluminium Motors

Performance Data and Mounting Dimensions

1-Phase With or Without Thermal Protection and Manual Reset

Footed Part Number	HP	RPM	MARCO FASE		Volt	HZ	Amps 230V	LRT %	BDT %	LRA %	EFF %	PF %	KG
ML8014	0.74	1656	80	1	115/230	60	4.21	250	180	500	66	90	9.5
ML8012	1	3336	80	1	115/230	60	5.09	250	180	620	72	93	9
ML8024	1	1656	80	1	115/230	60	5.49	250	180	570	69	90	10.5
ML8022	1.48	3348	80	1	115/230	60	7.36	250	180	570	73	93	10
ML8034	1.48	1668	80	1	115/230	60	7.57	250	180	570	69	90	13.5

