

FRAME 71

ALUMINIUM MOTORS

Reliable, Long-Lasting and

Compact Motor Muscle
for Commercial and/or
Industrial Use

1/3-3HP 1PH & 3PH TEFC 60 Hz IEC AC

Inverter Duty Rated: 3:1CT & 5:1VT (3-Phase only)

Service Factor: 1.15


Protection Degree: IP55

Enclosure: TEFC

1PH available with and without thermal
protection and manual reset (TP)

Aluminium IEC

Energy saving design

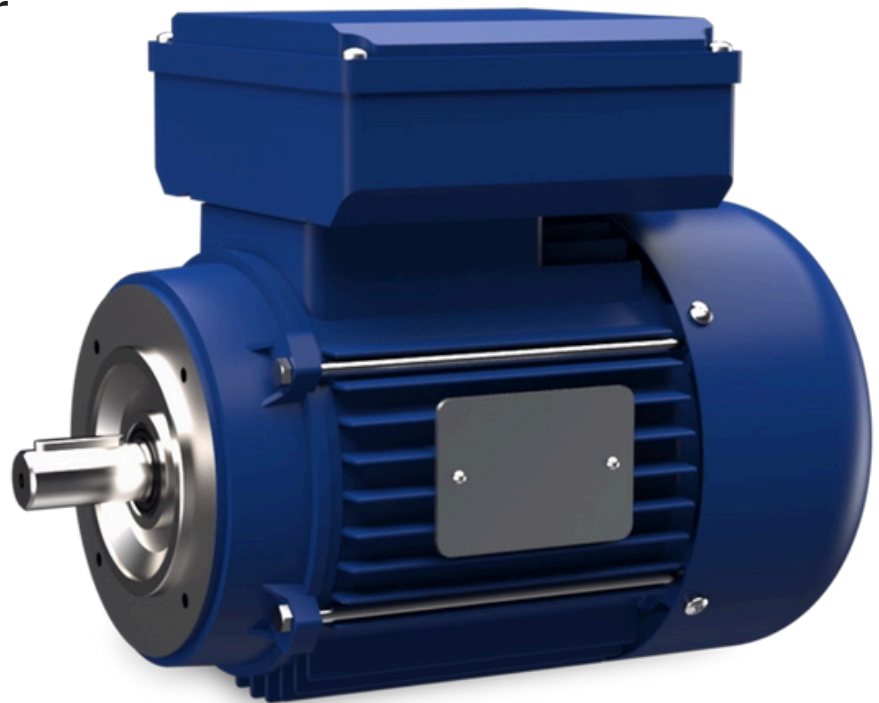

 **Giravan**

71 Frame Aluminium Motors

Performance Data and Mounting Dimensions

1-Phase With or Without Thermal Protection and Manual Reset

Footed Part Number	HP	RPM	MARCO FASE		Volt	HZ	Amps 230V	LRT %	BDT %	LRA %	EFF %	PF %	KG
ML7114	0.34	1644	71	1	115/230	60	2.10	250	170	500	60	90	6
ML7124	0.50	1644	71	1	115/230	60	2.97	250	170	530	63	90	6.5
ML7112	0.50	3300	71	1	115/230	60	2.78	250	180	560	65	93	6
ML7122	0.74	3312	71	1	115/230	60	3.95	250	180	530	68	93	6.5
ML7134	0.74	1656	71	1	115/230	60	4.21	250	170	530	63	90	9.5
ML7132	1	3336	71	1	115/230	60	5.09	250	180	620	72	93	9

